


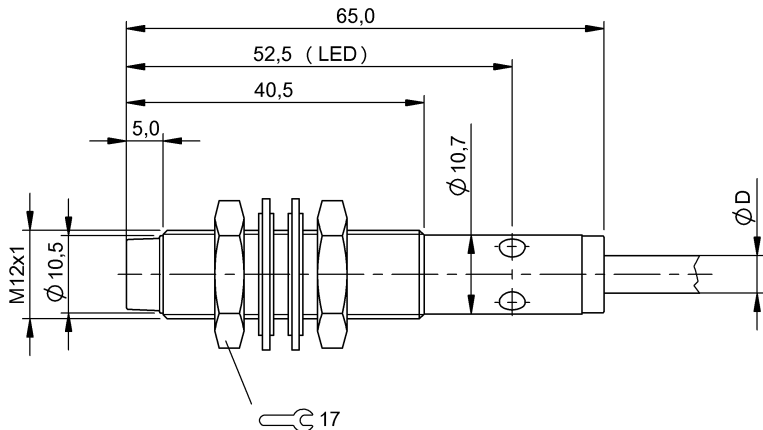

Basic features

Approval/Conformity	CE
	UKCA
Basic standard	cULus
	WEEE
	IEC 60947-5-2
	IEC 60947-5-7

Display/Operation

Function indicator	Adjustment indicator
Power indicator	no

Electrical connection

Cable diameter D	4.60 mm
Cable length L	5 m
Conductor cross-section	0.34 mm ²
Connection type	Cable, 5.00 m, PUR
Number of conductors	3
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Limit frequency –3 dB	500 Hz
Load resistance R _L min.	2000 Ohm
No-load current I ₀ max. at U _e	10 mA
Operating voltage U _b	15...30 VDC
Protection class	II
Rated insulation voltage U _i	250 V AC
Rated operating voltage U _e DC	24 V
Ripple max. (% of U _e)	15 %
Slope U	3.30 V/mm

Environmental conditions

Ambient temperature	-10...70 °C
Contamination scale	3
EN 60068-2-27, Shock	Half-sinus, 30 g _n , 11 ms
EN 60068-2-6, Vibration	55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP67

Functional safety

MTTF (40 °C)	640 a
--------------	-------

Interface

Analog output	Analog, voltage 0...10 V
Output characteristic	falling on approach
Output voltage at SI max.	10 V
Output voltage at SI min.	0 V
Output voltage at Se	5 V

Inductive Sensors
BAW M12MF2-UAC40F-BP05
Order Code: BAW0018

BALLUFF

Material

Housing material	Brass, nickel-plated
Material jacket	PUR
Material sensing surface	PBT

Mechanical data

Dimension	Ø 12 x 65 mm
Installation	non-flush
Size	M12x1
Tightening torque	15 Nm

Range/Distance


Linearity range SI	1...4 mm
Measuring range	1...4 mm
Non-linearity max.	±90 µm
Repeat accuracy per BWN	±10 µm
Temperature drift max. from end value	±5.0 %

Remarks

Values referenced to axial approach of St 37 target. For other materials correction factors are applied.
Scattering (e.g. due to manufacturing tolerances) is described by the tolerance T at Se. This can be approximated using the formula: $T = (sl_{max} + sl_{min}) / 20 = \pm xx \text{ mm}$.
UL-MARKINGS: - For use in NFPA 79 Applications only - Adapters providing field wiring means are available from the manufacturer. Refer to manufacturers information.
For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Wiring Diagrams



Technical Drawings

