Plastic bodied limit switch
Series I88

Description **I88-U1Z AH**	Article number **6186135114**

Operating symbol



Fixed positioning for
safety applications
Mounting screw
according to DIN 912 M5



Operating diagram

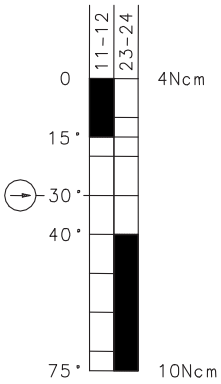

On Off

Tolerance:
Operating Point ± 3,5 °;
Operating force ± 10 %

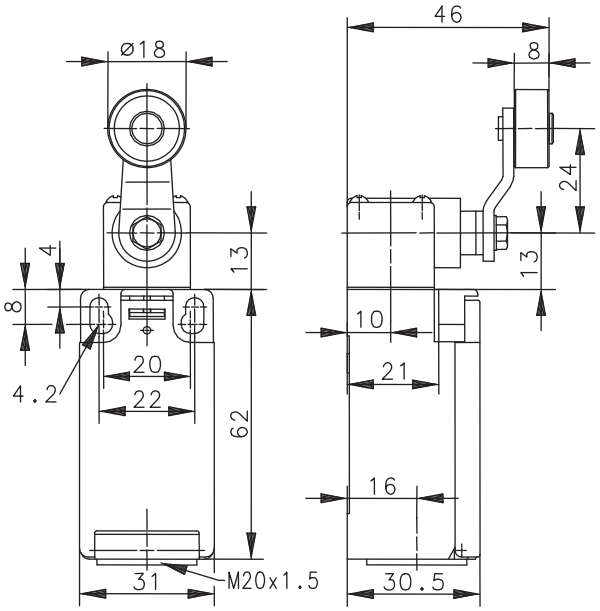

Electrical Data		
Rated insulation voltage	U_i	250 V AC
Conv. thermal current	I_{the}	10 A
Rated operational voltage	U_e	240 V
Utilization category		AC-15, U_e/I_e 240 V / 3 A
Direct opening action	⊖	acc. to IEC/EN 60947-5-1, annex K
Short-circuit protective device		Fuse 10 A gG
Protection class		II (totally insulated)