

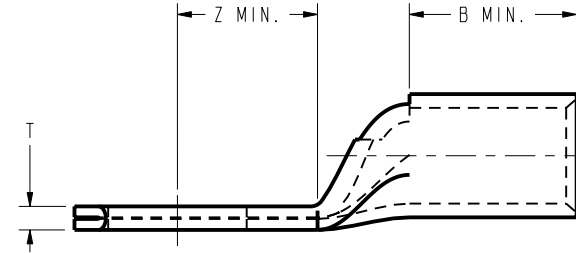


DRAWING NO. SD034764		7				6				5			
BURNDY® CATALOG NUMBER	COPPER AIRCRAFT CABLE MIL-W-5086	MS20659 DASH NUMBER	STUD SIZE	B MIN.	C ±.020	L MAX.	N ±.010	R REF.	T ±.020	Y MAX.	Z MIN.	INSTALL. TOOL INDEX NUMBER	
YAV2C-L3	AN-2	146	10	.595	.688	1.722	.344	.69	.091	1.373	.349	41	
YAV2C-L1		113	1/4			1.722	.344		.091	1.373	.349		
YAV2C-L2		147	5/16			1.722	.344		.091	1.373	.349		
YAV2C-L		114	3/8			1.722	.344		.091	1.373	.349		
YAV2C-L23		---	3/8			1.868	.344		.091	1.519	.495		
YAV2C-L19		---	3/8			.665	1.943		.325	.094	1.613		.589
YAV2C-L26		---	3/8-10MM			.688	1.722		.344	.091	1.373		.349
YAV2C-L11		148	7/16			.770	1.878		.385	.079	1.488		.464
YAV2C-L4		133	1/2			.770	1.878		.385	.079	1.488		.464
YAV2C-L22		---	1/2			.770	2.082		.385	.079	1.692		.668
YAV2C-L38		---	3/4			1.250	2.337		.625	.051	1.707		.683
YAV2CL-L56		---	1/2			.725	.830		2.100	.406	.120 MIN		1.685
YAVIC-L6	AN-1	---	10	.595	.760	1.666	.344	.75	.109	1.317	.246	42	
YAVIC-L1		115	1/4			1.839	.380		.109	1.454	.383		
YAVIC-L2		149	5/16			1.839	.380		.109	1.454	.383		
YAVIC-L		116	3/8			1.839	.380		.109	1.454	.383		
YAVIC-L12		---	3/8-10MM			1.759	.344		.109	1.410	.339		
YAVIC-L4		150	7/16			.860	1.970		.430	.102	1.535		.464
YAVIC-L3		134	1/2			.840	1.970		.430	.100	1.535		.464
YAVIC-L5		---	5/8			1.060	2.431		.500	.099	1.926		.855
YAVIC-L18		---	3/8			.760	1.989		.380	.109	1.604		.530
YAV25-L5	AN-1/0	---	10	.658	.830	1.988	.375	.75	.110	1.608	.428	43	
YAV25-L29		---	10-5MM			1.988	.375		.110	1.608	.428		
YAV25-L1		117	1/4			2.028	.415		.110	1.608	.428		
YAV25-L2		151	5/16			2.028	.415		.110	1.608	.428		
YAV25-L		118	3/8			2.028	.415		.110	1.608	.428		
YAV25-L15		---	3/8			.687	1.852		.343	.140	1.504		.324
YAV25-L26		---	3/8			.880	2.089		.440	.104	1.644		.464
YAV25-L30		---	3/8			.830	2.830		.390	.110	2.435		1.255
YAV25-L28		---	3/8-10MM			.830	2.028		.390	.110	1.608		.428
YAV25-L16		152	7/16			.880	2.089		.440	.105	1.644		.464
YAV25-L3		135	1/2			.880	2.089		.440	.105	1.644		.464
YAV25-L4		---	5/8			.880	2.305		.500	.105	1.800		.620
YAV25-L23		---	3/4			.953	2.490		.625	.093	1.860		.680
YAV25-L16G1		---	7/16			.830	2.089		.440	.110	1.644		.464
YAV25-L362		---	1/2			.830	2.089		.440	.110	1.644		.464
YAV25-L39		---	1/2			.973±.040	2.089		.440	.188 REF.	1.644		.464

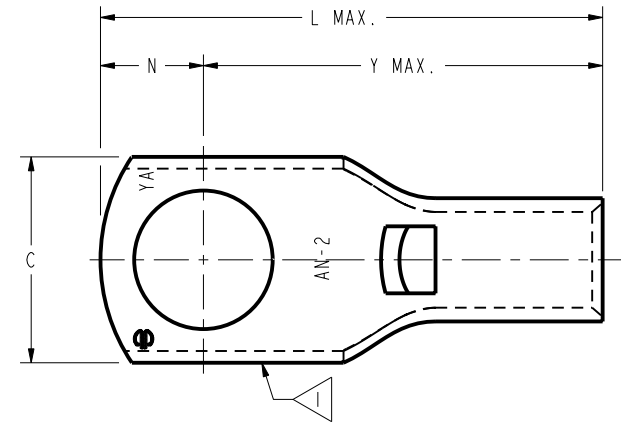

6 BELLED VIEW

NOTES:

1. DUE TO METHODS OF MANUFACTURING, SERRATIONS APPEAR ON TONGUE.
2. MATERIAL: COPPER TUBING
3. FINISH: TIN PLATED 5
4. ALL ITEMS ARE LISTED BY UNDERWRITERS LABS PER CONTROL NUMBER 670-B, FILE NUMBER E9498, WHITE CARD.
(DOES NOT APPLY TO YAV--L-G).
5. ADD SUFFIX "--NK" FOR NICKEL PLATING.
6. ADD SUFFIX "B" FOR BELLED BARREL. BELLED VERSIONS OF THESE HYLUGS™ DON'T CONFORM TO THE MS20659 DASH NO.

TO ORDER BURNDY[®] PRO

HYLUG TM			
ITEM NO:	N/A		
CAT. NO:	YAVL (SEE TABLE)		
DRAWN BY:	ESK	02-02-73	8 BURNDY
CHECKER:	TB	06-01-77	
DSN APPVL:	TB	06-01-77	
MFG APPVL:	--	--	
QA APPVL:	--	--	
MKT APPVL:	--	--	SCALE: 3:1
PROD FAM:	PROD./SMALL COMP.	DRAWING NO	REV
PROJECT #:	--	SIZE	
DOCUMENT Type:	Sales	SD034764	J
REL LEVEL:	Released	SHEET 2 OF 3	