




Semiconductor Fuse 50-400A, 1250 Volts

BIF Document
17056630
Size **1***

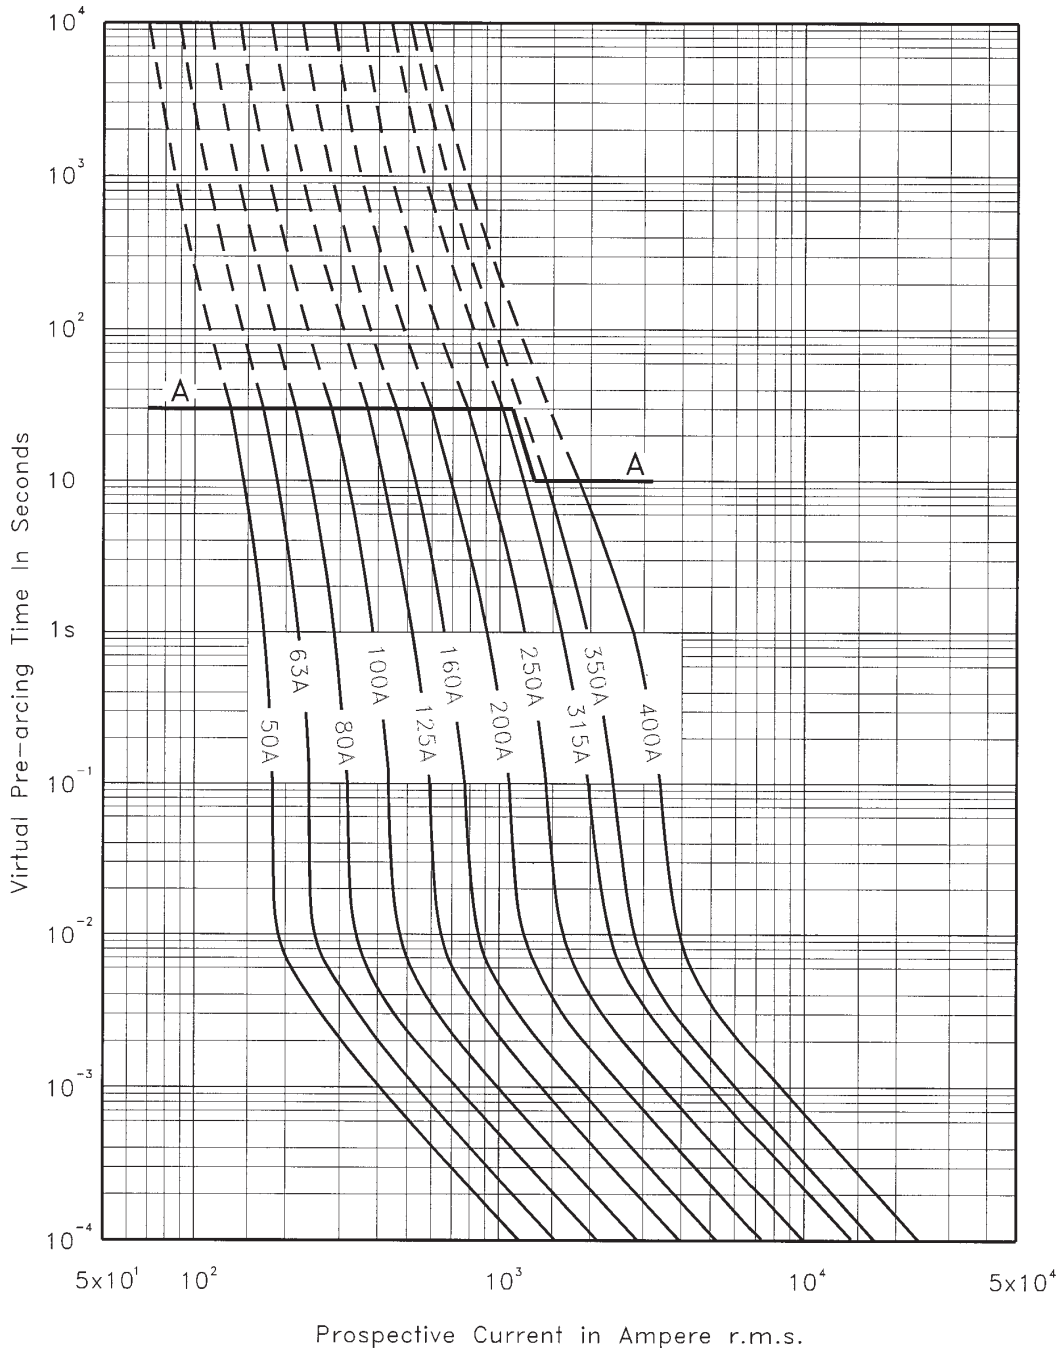

The partial dotted curves are for fuses designed to give part range protection (aR protection). Loading or operation above the curve indicated at A on the curves must in general be avoided. Please see technical guidance 170K... for further information. Curves that are not dotted are for fuses designed to give full range protection.


Pre-Arcing Time-Current Characteristic Curves
TYPOWER ZILOX

Approved: _____	PK	Page 1 of 2
Rev. Date: _____	FEB-99	Pub. Date: NOV-94



Semiconductor Fuse
50-400A, 1250 Volts

BIF Document
17056630
Size **1***

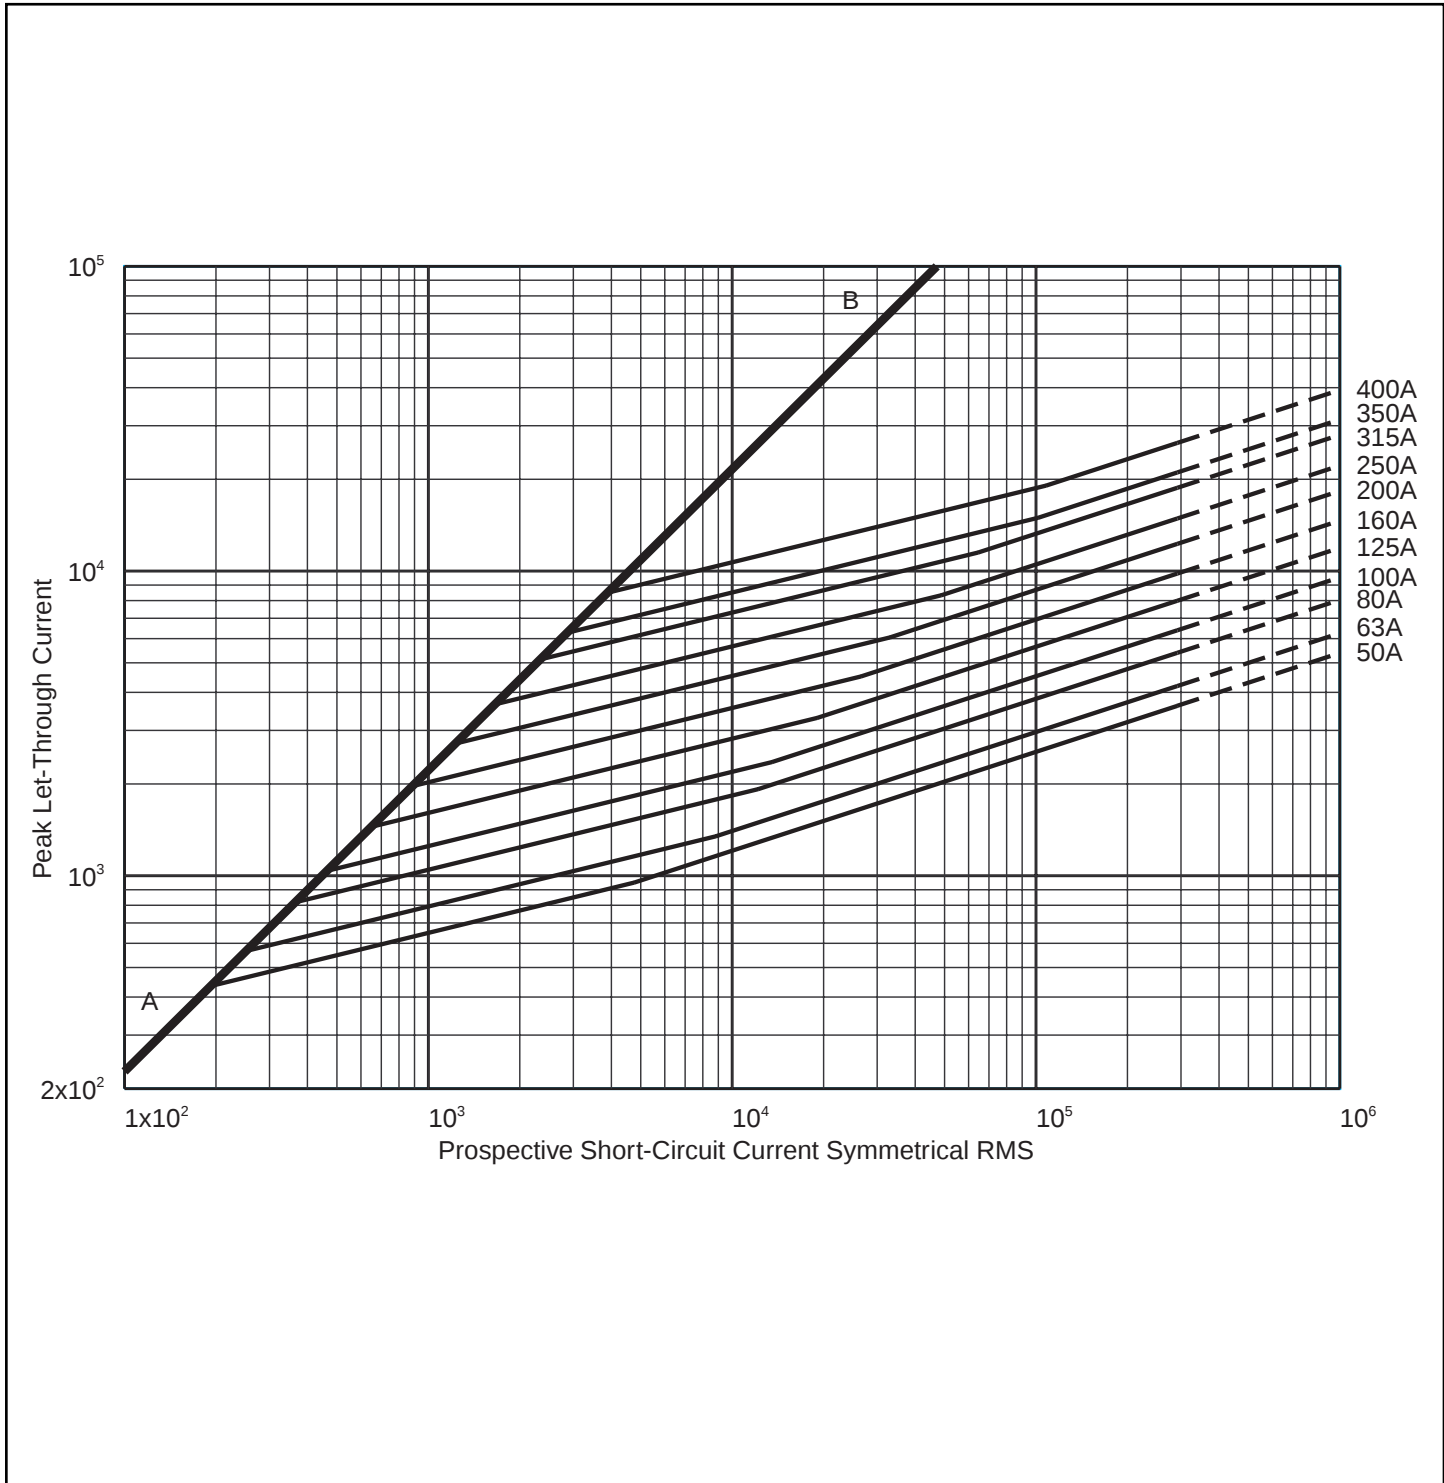

Peak Let-Through Cut-Off Current Characteristic Curves
TYPOWER ZILOX

Approved: **PK** Page **2 of 2**
Rev. Date: **OCT-94** Pub. Date: **NOV-94**