


CARLO GAVAZZI



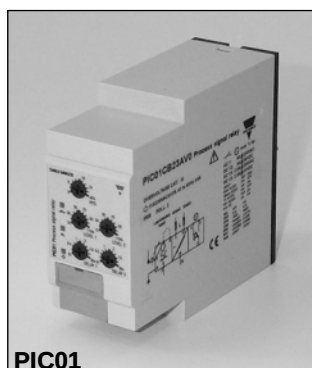

Input Specifications (cont.)

Note: MP 3... current transformers not suitable for under current measurements due to the output signal of the device (see data sheet)	
Contact input DIC01 PIC01 Disabled Enabled Latch disable	Terminals Z1, Y1 Terminals 8, 9 > 10 kΩ < 500 Ω > 500 ms

Output Specifications

Output Rated insulation voltage	1 or 2 x SPDT relays 250 VAC
Contact ratings (AgSnO ₂) Resistive loads AC 1 DC 12 Small inductive loads AC 15 DC 13	μ 8 A @ 250 VAC 5 A @ 24 VDC 2.5 A @ 250 VAC 2.5 A @ 24 VDC
Mechanical life	≥ 30 x 10 ⁶ operations
Electrical life	≥ 10 ⁵ operations (at 8 A, 250 V, cos φ = 1)
Operating frequency	≤ 7200 operations/h
Dielectric strength Dielectric voltage Rated impulse withstand volt.	≥ 2 kVAC (rms) 4 kV (1.2/50 μs)

Supply Specifications

Power supply Rated operational voltage through terminals: A1, A2 or A3, A2 (DIC01) 2, 10 or 11, 10 (PIC01) 724: 748: B48: B23:	Overvoltage cat. III (IEC 60664, IEC 60038) 24 VDC ± 20%, insulated 48 VDC ± 20%, insulated 24/48 VAC ± 15% 45 to 65 Hz, insulated 115/230 VAC ± 15% 45 to 65 Hz, insulated	Dielectric voltage Supply to input Supply to output Input to output	DC supply 2 kV 4 kV 4 kV	AC supply 4 kV 4 kV 4 kV
		Rated operational power AC DC	5 VA 3 W	

General Specifications

Power ON delay	1 s ± 0.5 s or 6 s ± 0.5 s	Environment Degree of protection Pollution degree Operating temperature Storage temperature	(EN 60529) IP 20 3 (DIC01), 2 (PIC01) -20 to 60°C, R.H. < 95% -30 to 80°C, R.H. < 95%
Reaction time Alarm ON delay Alarm OFF delay	(input signal variation from -20% to +20% or from +20% to -20% of set value) < 100 ms < 100 ms	Housing dimensions Din-rail version Plug-in version	45 x 80 x 99.5 mm 36 x 80 x 87 mm
Accuracy Temperature drift Delay ON alarm Repeatability	(15 min warm-up time) ± 1000 ppm/°C ± 10% on set value ± 50 ms ± 0.5% on full-scale	Weight	Approx. 250 g
Indication for Power supply ON Alarm ON Output relay ON	LED, green LED, red (flashing 2 Hz during delay time) 1 or 2 x LED(s), yellow	Screw terminals Tightening torque	Max. 0.5 Nm acc. to IEC 60947
		Approvals	UL, CSA (except 748)
		CE Marking	Yes
		EMC Immunity Emission	Electromagnetic Compatibility According to EN 61000-6-2 According to EN 50081-1

Mode of Operation

DIC01 and PIC01 monitor both AC and DC current and voltage. DIC01 can also monitor positive and negative DC voltage connecting terminals Y1 and Z3.

Example 1

(no contact input - under+over voltage - 2 x SPDT N.D. relays

(1 x SPDT for PIC01) - TRMS)
DIC01: One relay operates when the voltage drops below the under voltage set point for more than the respective delay time. It releases when the voltage exceeds the set level plus the set hysteresis. The other relay operates when the voltage exceeds

the over voltage set point for more than the respective delay time. It releases when the voltage drops below the set level minus hysteresis. PIC01: The relay operates when the voltage drops below the under voltage set level for more than the respective set delay time or when it

exceeds the over voltage set level for more than the relative set delay time. The relay releases when the voltage exceeds the under voltage set level plus hysteresis and it drops below the over voltage set level minus hysteresis (the hysteresis is the same for both set levels).

Mode of Operation (cont.)

Example 2

(latch enable active - under+under current - 2 x SPDT relays (1 x SPDT for PIC01) - TRMS)

DIC01: Each relay operates and latches when the current drops below the respective set level for more than the respective delay time. Provided that the current has exceeded the respective set level plus hysteresis, each relay releases when the contact input's connection is interrupted.

PIC01: The relay operates when the current drops below the higher set level for more than the respective delay time. Provided that the

current has exceeded the higher set level plus hysteresis the relay releases when the contact input's connections is interrupted.

Note

Different delay times can be used for appropriate reaction according to the set points.

Example 3

(inhibit enable active - over+over current with MI CT - DPDT relay (SPDT for PIC01) - TRMS)

Provided that the contact input's connection is interrupted, the relay operates when the current flowing in the MI CT exceeds the lower set level for more than the respective delay time. It releases when the current drops below the lower set level minus hysteresis or

when the contact input's pins are connected.

Example 4

(inhibit enable active - over+over current with A82-10 CT -

DPDT relay (1 x SPDT for PIC01) - TRMS

Provided that the contact input's connection is interrupted, the relay operates when the current flowing in the A82-10 CT exceeds the lower set level for more than its delay time. It releases when the current drops below the lower set level minus hysteresis or when the contact input's pins are connected.

Example 5 (DIC01 only)

(no contact input - under+over voltage - 2 x SPDT N.D. relays - plus/minus DC

One relay operates when the

voltage drops below the under voltage set point for

more than the respective delay time. It releases when the voltage exceeds the set

level plus the set hysteresis. The other relay operates when the voltage exceeds the over voltage set point for more than the respective delay time. It releases when the voltage drops below the set level minus hysteresis.

In this case the spare front label has to be placed on the device for proper level adjustment.

Note

When the inhibit contact is opened, if the input signal is already in alarm position, the delay time needs to elapse before relay(s) activation.

Function/Range/Level and Time Delay Setting

Adjust the input range setting the DIP switches 1 and 2 of the main black selector as shown below.

Select the desired function setting the DIP switches 3 to 6 of the black selector and 1, 2 of the small red selector as shown below.

To access the DIP switches

open the grey plastic cover as shown below

The selection between current and voltage is automatically selected through the input connectors.

TRMS or positive/negative DC monitoring selectable by short-circuiting terminals Y1 and Z3 (DIC01 only).

Selection of level, time delay and hysteresis:

Upper knob:


Setting of hysteresis on relative scale: 0 to 30% on set value.

Centre knobs:

Current level setting on relative scale: 10 to 110% on full scale.

Lower knobs:

Setting of delay on alarm time on absolute scale (0.1 to 30 s).

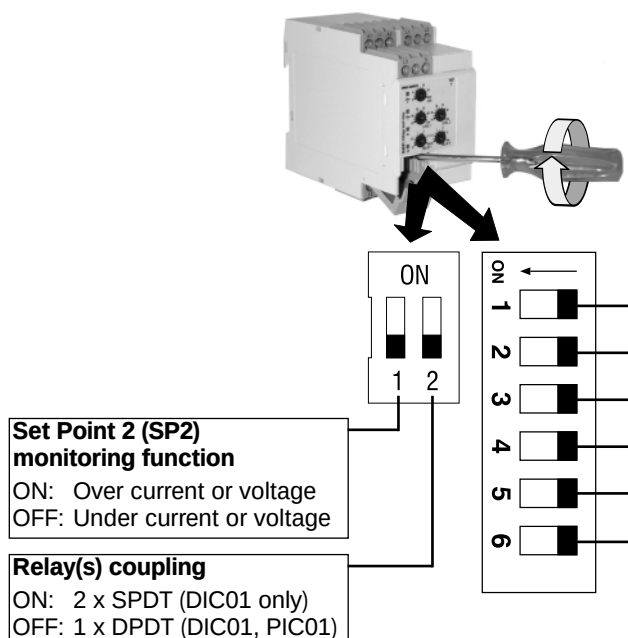

Measuring range (depending on connections)

		SW1	ON	ON	OFF
Connect	Input term.	SW2	OFF	ON	ON
None	DIC01: Y1,Y2 PIC01: 5,7		0.5 to 5 mA AC/DC	2 to 20 mA AC/DC	None
Y1 to Z3	DIC01: Y1,Y2		-5 to +5 mA DC	-20 to +20 mA DC	None
None	DIC01: Y1,Y3 PIC01: 6,7		0.1 to 1V AC/DC	4 V _p	1 to 10 V AC/DC
Y1 to Z3	DIC01: Y1,Y3		-1 to +1 V DC	None	-10 to +10 V DC

Relay(s) working mode

ON: Normally De-energized (ND)
OFF: Normally Energized (NE)

Power ON delay

ON: 6 s ± 0.5 s
OFF: 1 s ± 0.5 s

Contact input

ON: Latch function enable
OFF: Inhibit function enable


Set Point 1 (SP1) monitoring function

ON: Over current or voltage
OFF: Under current or voltage




Wiring Diagrams


Example 1

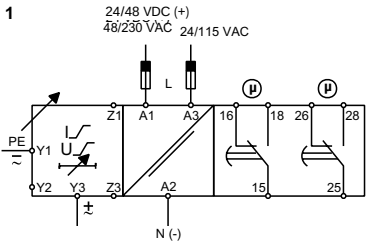


Example 2

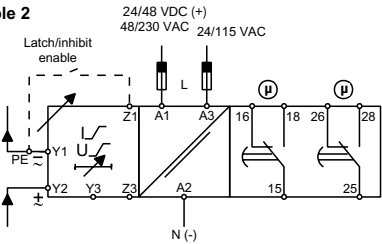


Example 3

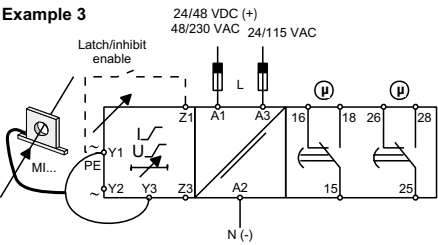


Example 4

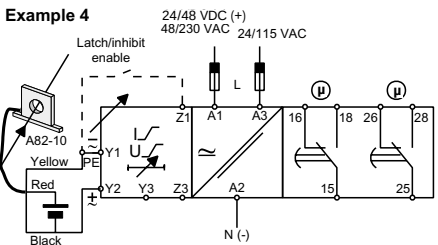


Example 5

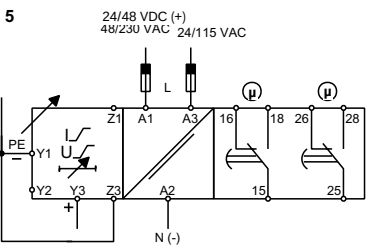


Example 1




Example 2



Example 3

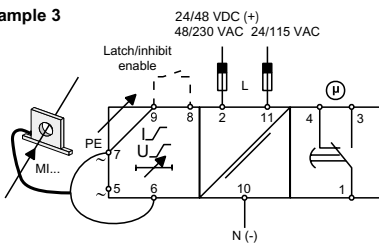

Example 4

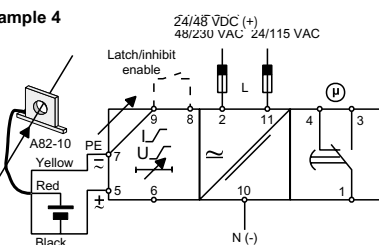


DIC01


PIC01

Operation Diagrams


Over+over voltage/current - N.D. relay(s)

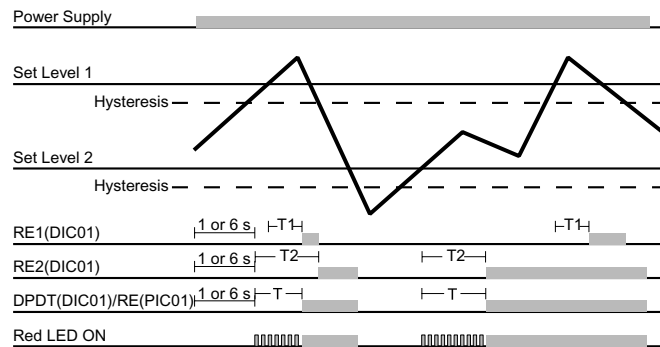


Over+over voltage/current - Latch - N.D. relay(s)

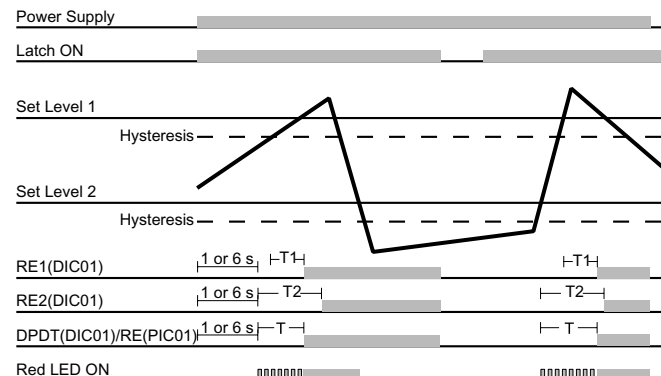

Over+under voltage/current - N.E. relay(s)

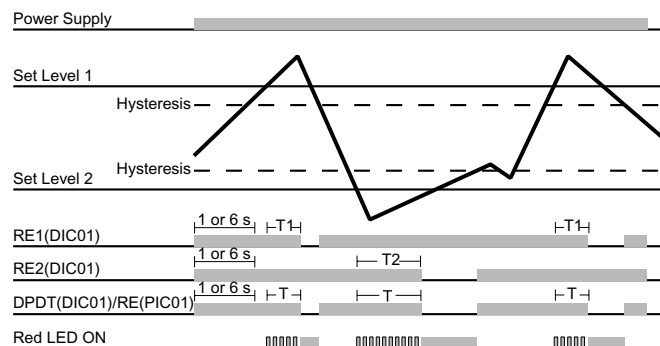

Over+under voltage/current - Inhibit - N.E. relay(s)

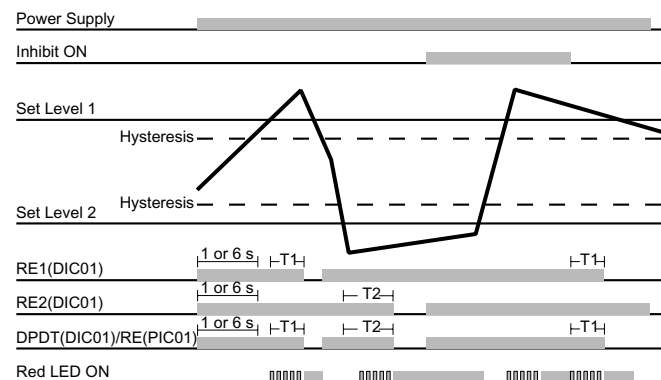

Under+under voltage/current - N.D. relay(s)

