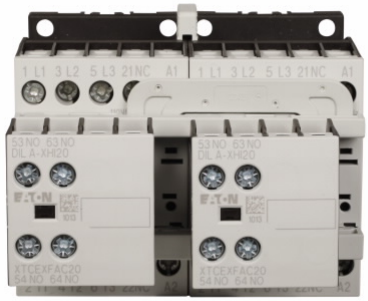

# Eaton XT IEC contactor

**XTCR012B21G**

**UPC:**782116885015

**Dimensions:**

- **Height:** 4 IN
- **Length:** 3.5 IN
- **Width:** 5.5 IN

**Weight:**1.2 LB

**Notes:**Screw terminals (6-65A); 5 mm (80-150A); no lugs (185-2000A)

**Warranties:**

- 1 year

**Specifications:**

- **Amperage Rating:** 12A
- **Coil Voltage:** 190 Vac 50 Hz, 220 Vac 60 Hz
- **Contact Configuration:** 2NO-2NO
- **Frame Size:** 45 mm
- **Frequency Rating:** 50-60 Hz
- **Max Hp Rating:** 0.5, 2/ 3, 3, 10, 10 hp (1/3PH @115,230/200,230,460,575 V)
- **Number Of Poles:** Three-pole
- **Operation:** Reversing
- **Series:** XT IEC series
- **Terminals:** Screw terminals
- **Type:** Full voltage reversing contactor

**Supporting documents:**

- Eatons Volume 5-Motor Control and Protection
- XTCR_B 3D Inventor
- XTCR_B 2D Drawing Xchange
- XTCR_B 3D Model Xchange
- XTCR_B AutoCAD 2D Footprint (mm)
- XTCR_B AutoCAD 2D Footprint
- XTCR_B 2D PDF
- Eaton Specification Sheet - XTCR012B21G

**Certifications:**

- CSA Certified
- IEC 60947
- EN 60947
- UL Listed

**Product compliance:**

- RoHS Compliant
- CE Marked

---

© 2016 Eaton. All rights reserved.