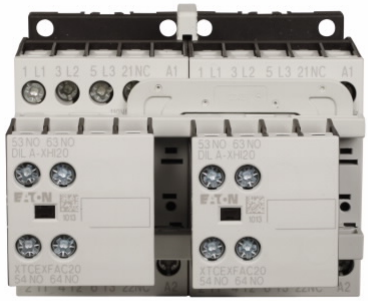

Eaton XT IEC contactor

XTCR032C21T

UPC:782116885688

Dimensions:

- **Height:** 4.5 IN
- **Length:** 4.75 IN
- **Width:** 7.5 IN

Weight:2.45 LB

Notes: Screw terminals (6-65A); 5 mm (80-150A); no lugs (185-2000A)

Warranties:

- 1 year

Specifications:

- **Amperage Rating:** 32A
- **Coil:** 24V 50/60 Hz
- **Coil Voltage:** 24 Vac, 50-60 Hz
- **Contact Configuration:** 2NO-2NO
- **Frame Size:** 45 mm
- **Frequency Rating:** 50-60 Hz
- **Max Hp Rating:** 3, 5/ 10, 10, 20, 25 hp (1/3PH @115,230/200,230,460,575 V)
- **Number Of Poles:** Three-pole
- **Operation:** Reversing
- **Series:** XT IEC series
- **Terminals:** Screw terminals
- **Type:** Full voltage reversing contactor

Supporting documents:

- Eatons Volume 5-Motor Control and Protection
- XTCR_C 2D Drawing Xchange
- XTCR_C AutoCAD 2D Footprint
- XTCR_C 2D PDF
- XTCR_C AutoCAD 2D Footprint (mm)
- XTCR_C 3D Model Xchange
- XTCR_C 3D Inventor
- Eaton Specification Sheet - XTCR032C21T

Certifications:

- CSA Certified
- EN 60947
- UL Listed
- IEC 60947

Product compliance:

- CE Marked
- RoHS Compliant

© 2016 Eaton. All rights reserved.