M11282 1

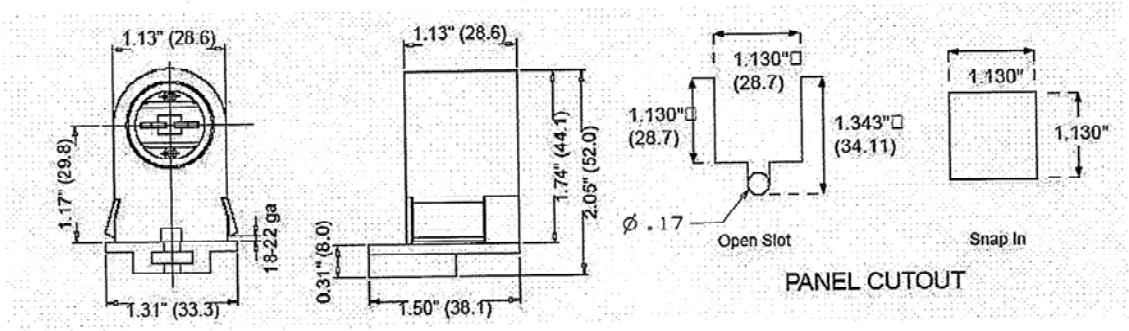

NOTES:

1. DIMENSIONS ARE INCHES [mm].
2. MADE FROM POLYCARBONATE. FLEXIBLE SNAP-IN WINGS FOR QUICK EASY INSERTION INTO PANEL.
3. FOR USE WITH 60-112W, T17/12/10J LAMPS.
4. QUICK CONNECT PUSH-IN WIRE TERMINALS ACCEPTS 18 AWG SOLID OR SOLDER DIPPED LEADS, STRIPPED 3/8". MAXIMUM 6.5 LBS. CONDUCTOR INSERTION FORCE.
5. TWO WIRE PORTS PER TERMINAL TO SPEED HARNESS WIRING.
6. ACCOMMODATE PANEL THICKNESS .036-.048 IN.[.91-1.21mm]
7. c UL US LISTED; c CSA US CERTIFIED.
7. RATED 660W MAX., 600V MAX. ON FIXED END.
8. PACKAGING: SEALED IN POLYBAG.
9. DIMENSIONAL TOLERANCES: ±0.05",±0.010"

CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
LAMPHOLDER	PC	WHITE

SYM	REVISIONS	APP	DATE
1	12/01/09 RELEASE TO PRODUCTION PER DCN 16198	CAC	

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE
HIGH OUTPUT FLUORESCENT LAMPHOLDER, SLIDER-ON LOW PRF, FIXED END

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ±1/64
DECIMALS ±.005
ANGLES ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY DLI	APP. BY CAC
TR. BY	SCALE NONE
CHK'D BY	DATE 04/01/09

DIMENSION SHEET FOR CAT. NO. RL308 REPAIRABLE ☐ NON-REPAIRABLE ☒ B M11282 1