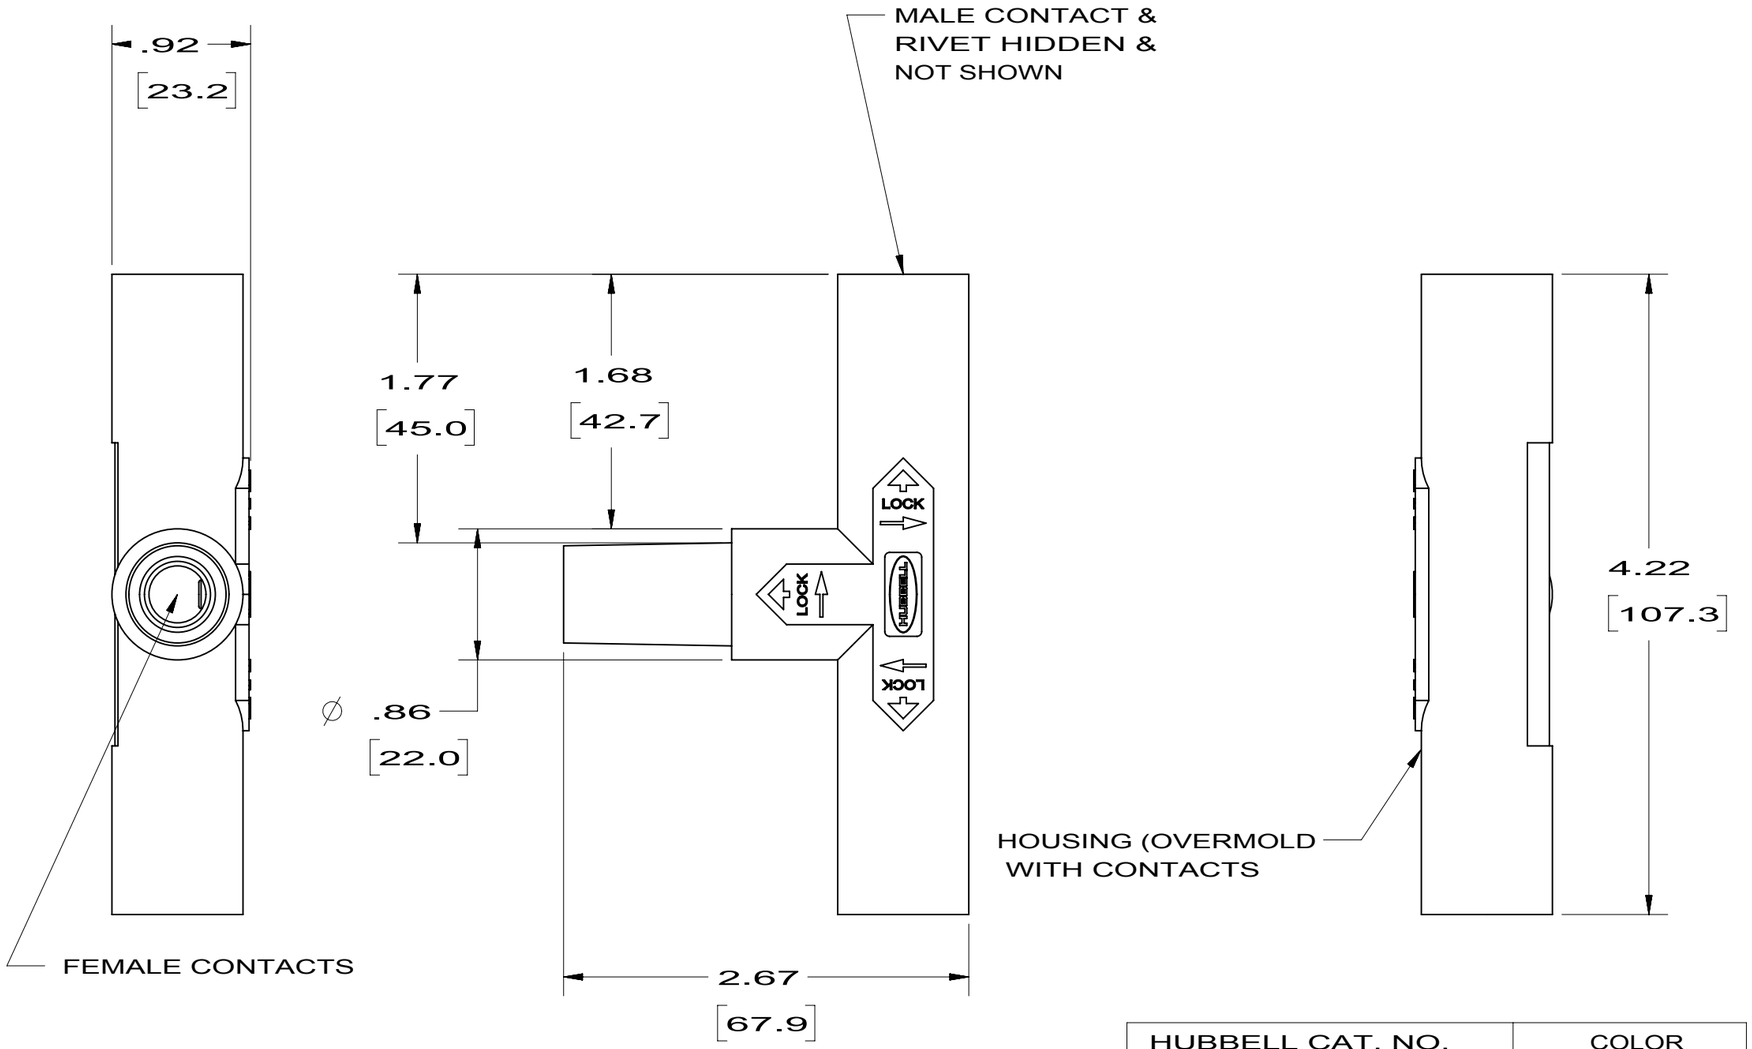

NOTES:
1. DIMENSIONS ARE INCHES ± .02
[mm] ± .5
2. RATING: 600V 150 AMP
3. UL/c-UL ENCLOSURE TYPES 3R, 4X, 12.

HUBBELL CAT. NO.	COLOR
HBL15PTBK	BLACK
HBL15PTW	WHITE
HBL15PTGN	GREEN
HBL15PTR	RED
HBL15PTBL	BLUE

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
HOUSING	TPE	SEE TABLE
FEMALE CONTACT	BRASS	
RIVET	BRASS	
MALE CONTACT	BRASS	

SYM	REVISIONS	APP	DATE
4	REVISED NOTE 2 FROM 600VAC/250VDC TO 600V PER DCN 23410 RGP	RGP	11/01/17
3	CHANGED CATALOG NO.'S FROM HBLPTXX15 TO HBL15PTXX. ADD DIM 4.22 PER DCN 19979 CAC	CAC	7/24/13
2	UPDATED REMOVE OR,BR,Y PER DCN 19061 CAC	CAC	8/29/12
1	RELEASED FOR PRODUCTION PER DCN 12733 PJT	PJT	1/10/06

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE 150A SINGLE POLE PARALLING T FEMALE/MALE/MALE

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ± 1/64
DECIMALS ± .005
ANGLES ± 2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY	PJT	APP. BY	
TR. BY		SCALE	1:1
CHK'D BY		DATE	1/10/06

DIMENSION SHEET FOR CAT. NO.
SEE TABLE

REPAIRABLE ☐ NON-REPAIRABLE ☒

B

M-9737

4

CODE 74545