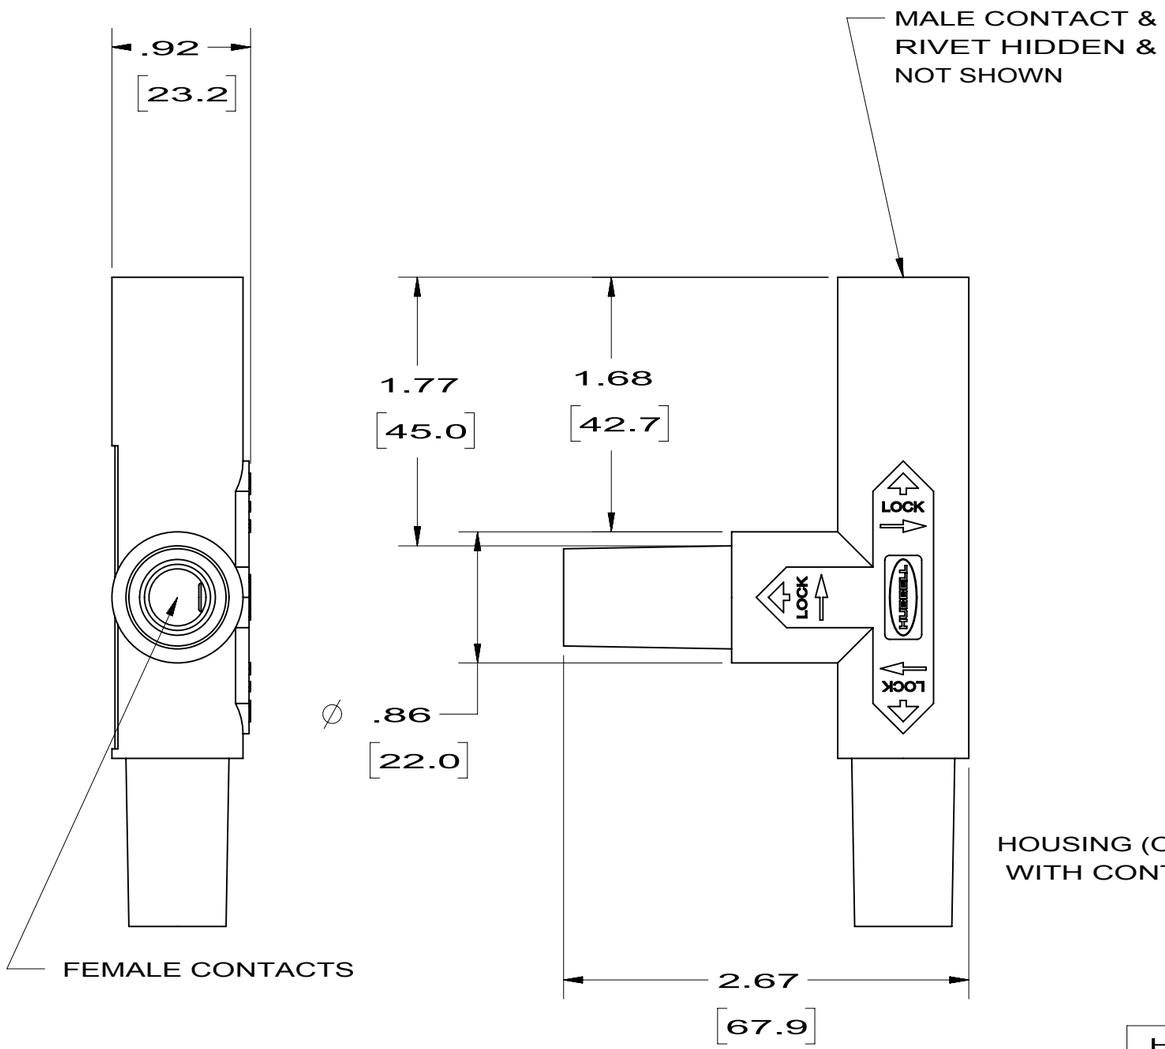

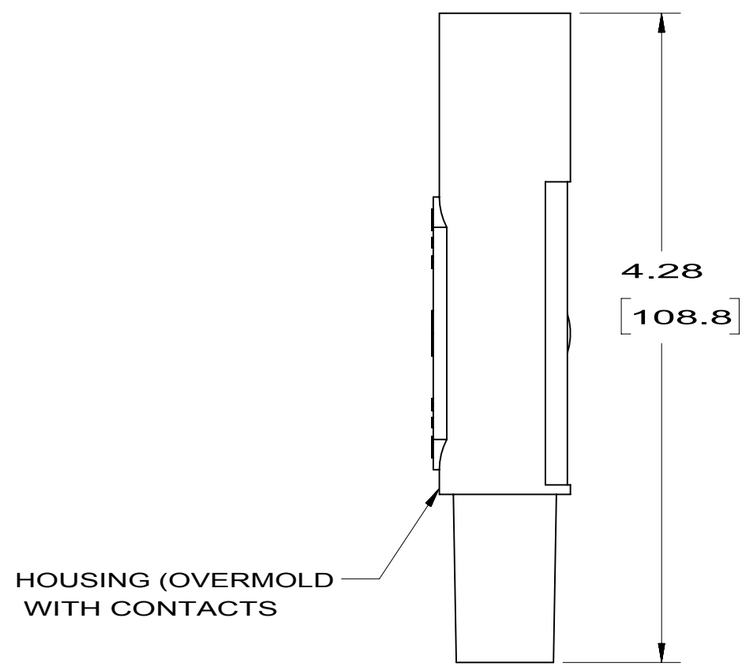

HUBBELL CAT. NO.	COLOR
HBL15TBK	BLACK
HBL15TW	WHITE
HBL15TGN	GREEN
HBL15TR	RED
HBL15TBL	BLUE

NOTES:
1. DIMENSIONS ARE INCHES ± .02
[mm] ± .5
2. RATING: 600V 150 AMP
3. UL/c-UL ENCLOSURE TYPES 3R, 4X, 12.

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
HOUSING	TPE	SEE TABLE
FEMALE CONTACT	BRASS	
RIVET	BRASS	
MALE CONTACT	BRASS	

SYM	REVISIONS	APP	DATE
4	REVISED NOTE 2 FROM 600VAC/250VDC TO 600V PER DCN 23410 RGP	RGP	11/01/17
3	CHANGED CATALOG NO.'S FROM HBLTXX15 TO HBL15.. ADDED DIM 4.28[108.8] PER DCN 19979 CAC	CC	7/23/13
2	UPDATED REMOVE OR,BR,Y PER DCN #19061 CAC	CC	8/28/12
1	RELEASED FOR PRODUCTION PER DCN #12733 PJT	TB	1/10/06

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE 150A SINGLE POLE TAPPING T FEMALE/ FEMALE/MALE

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ± 1/64
DECIMALS ± .005
ANGLES ± 2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
BRIDGEPORT, CT

DR. BY PJT | APP. BY TB
TR. BY | SCALE 1:1
CHK'D BY | DATE 1/10/06

DIMENSION SHEET FOR CAT. NO. SEE TABLE

REPAIRABLE ☐ NON-REPAIRABLE ☒

B

M-9736

4

CODE 74545