





Product designation			Roller lever plunger
Product type designation			KPE1
General characteristics			
Material		Housing	Aluminium-zinc alloy
		Roller	Plastic
Contact characteristics			
Type of contact			1NO+1NC Snap action
Thermal current Ith		A	10
IEC/EN 60947-5-1 designation			B300 R300
Rated insulation voltage Ui		V	400
Rated impulse withstand voltage Uimp		kV	4
Insulation class			I
IEC Conventional free air thermal current Ith		A	10
Resistance per pole (average value)		m?	<25
Conductivity			10mA 5V
Mechanical features			
Operating head fixing			Fixed
Operating torque			
			N
			Ib
Tightening torque (Max)			
Switch fixing			
			Nm
			Ibin
Weight		g	336
Operations			
Mechanical life		cycles	>10000000
Mechanical operation		cycles/h	3600
Ambient conditions			
Temperature			
Operating temperature			
			min
			°C
			-25
			max
			°C
			+70
Storage temperature			
			min
			°C
			-40
			max
			°C
			+70
Resistance & Protection			
IP degree			
Body housing			IP67
Pollution degree			3
Dimensions			

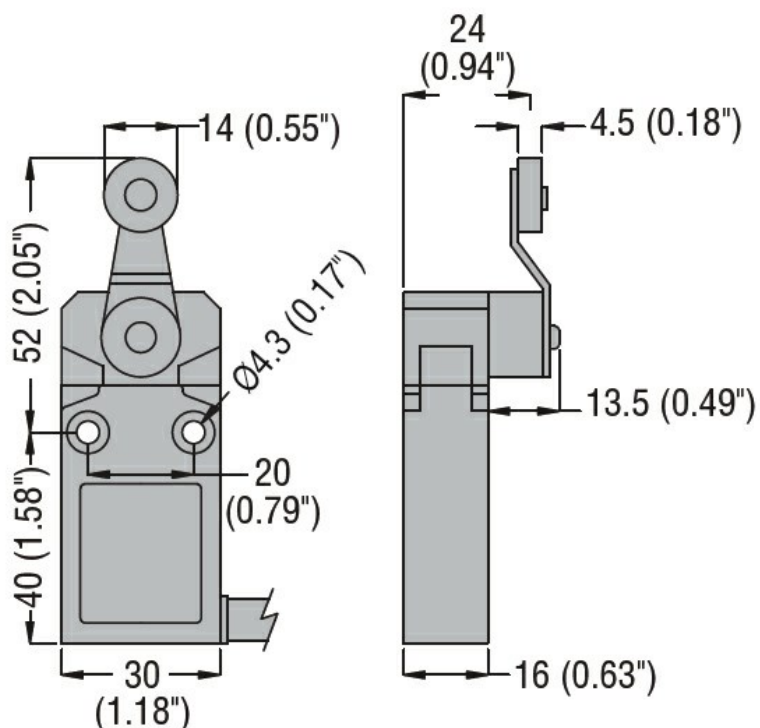

Wiring diagrams

Snap action

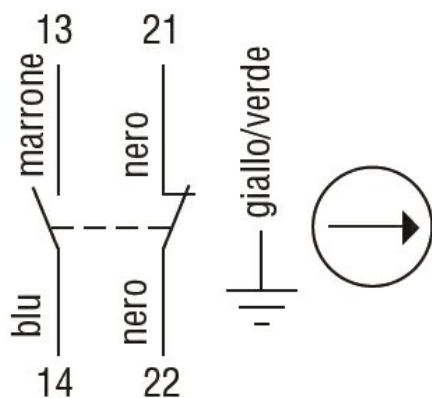

1NO + 1NC

Certifications and compliance

Compliance

CSA C22.2 n° 14.

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification

ETIM 8.0

EC000030 - End
switch