




Product designation	Rigid SM1 breaker-contactor connections	
Product type designation	SM1X Rigid SM1P breaker -	
Description	BF09..25A contactor connections.	
Accessories for	SM1P...	
Operational characteristics		
IEC maximum current (Imax)	A	25
Mechanical features		
Operating position	normal	Other
Weight	g	35
Dimensions		

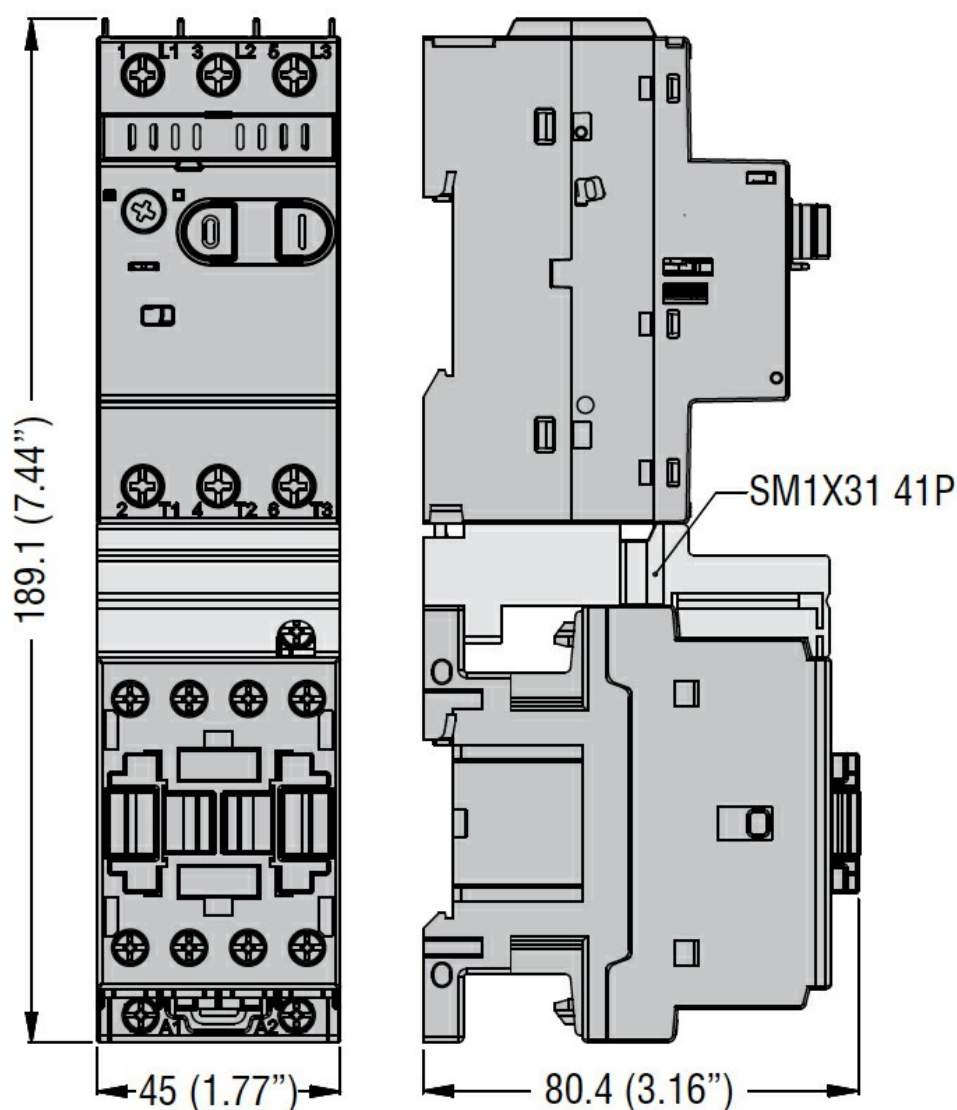

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates

cULus

EAC

ETIM classification

□