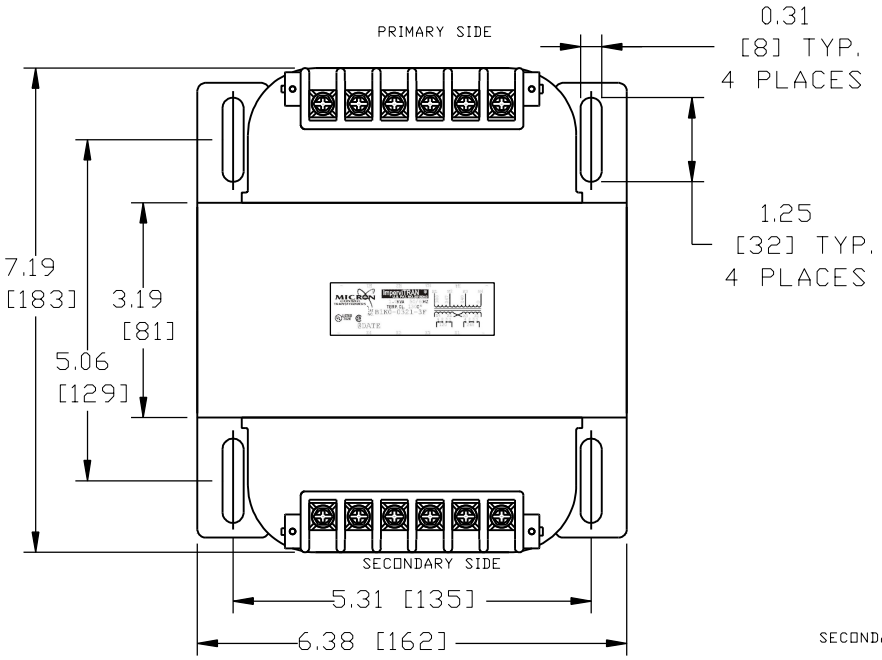

Transformer Specifications	
PRIMARY VOLTAGE(S)	240/347/380
SECONDARY VOLTAGE(S)	120X240
RATED V.A.	1000
RATED FREQUENCY	50/60
INSULATION CLASS	130
AGENCY APPROVALS	UL, CUL
ESTIMATED WEIGHT	

TEST REQUIREMENTS			
WINDING	H4-H3-H2-H1	X4-X3	X2-X1
D.C.VOLTS	239.7-346.8-380	123.7	123.7
LOAD VOLTS	240-347-380	120	120
F.L. AMPS	4.578/2.891	4.167	4.167
HI-POT	4800V	3000V	
EXCITING AMPS	0.50AMPS @ 380V, 50HZ		
EXCITING WATTS	34.5 MAX		

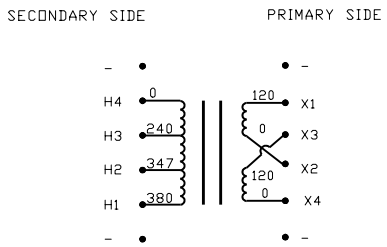

CONNECTION DIAGRAM

NOTE:
1. TORQUE CONNECTIONS TO 16 LB-IN
2. ALL MEASURMENTS IN INCHES (MM)

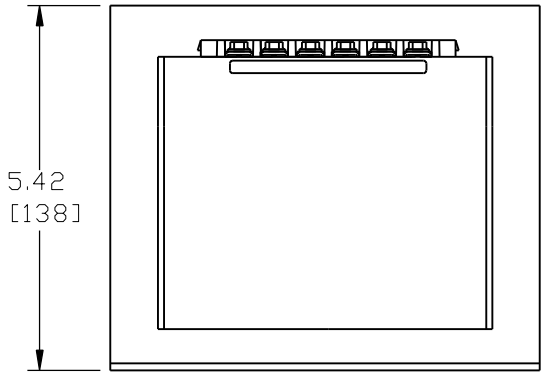

SECONDARY SIDE

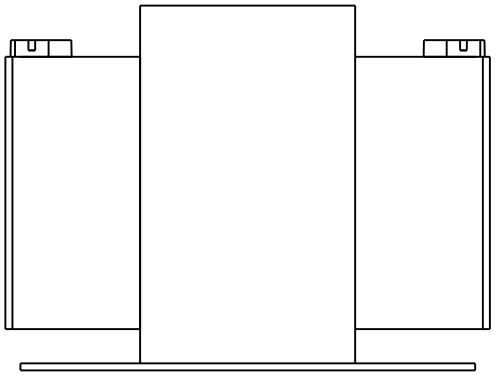

SECONDARY SIDE PRIMARY SIDE

PACKAGED ACCESSORIES	
1	1 PAIR OF J2 JUMPERS
–	–
–	–

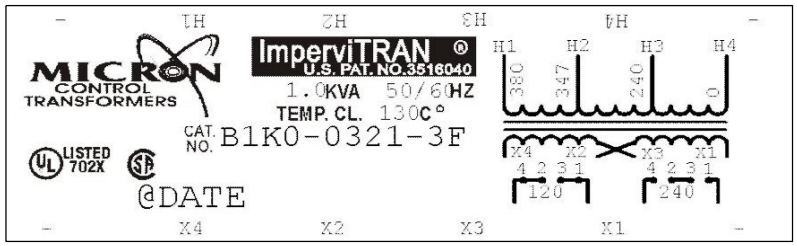

ECL	REVISIONS	BY	DATE
A	FORMAT REVISED	RN	08/20/08

MICRON CONTROL TRANSFORMER

DATE 08/20/08	DRAWN RN	CHECKED	APPROVED
RELEASE DATE	CUSTOMER PART NO.		
FINAL ASSY.	B1K0-0321-3FA9999A0 B1K0-0321-3FA7777B0		
SIZE C	SCALE NONE	B1K0-0321-3F	