

General Specifications

Motor Structure: Shaded Pole Induction Motor

Motor Protection: Impedance Protection

Insulation Resistance:

10M Ω or over with a DC500V Megger

Dielectric Withstand Voltage: AC 700V 1s

Allowable Ambient Temperature Range:

-10°C ~ +60°C (Operating)

-40°C ~ +70°C (Storage)

(non-condensing environment)

Expected Life

Failure Rate: 10%

25°C 90,000 Hours

Material

Casing : Aluminum (Black Painting)

Impeller : Steel


Bearing : Ball Bearings

Lead Wire : AWG22, UL3266

or Terminal : Faston #110 or equivalent


Panel Cut-Outs

Units: inch
(mm)




INLET SIDE / OUTLET SIDE

Characteristic Curves

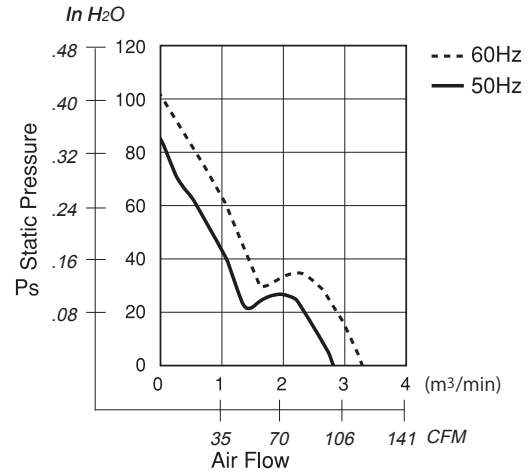

Outline

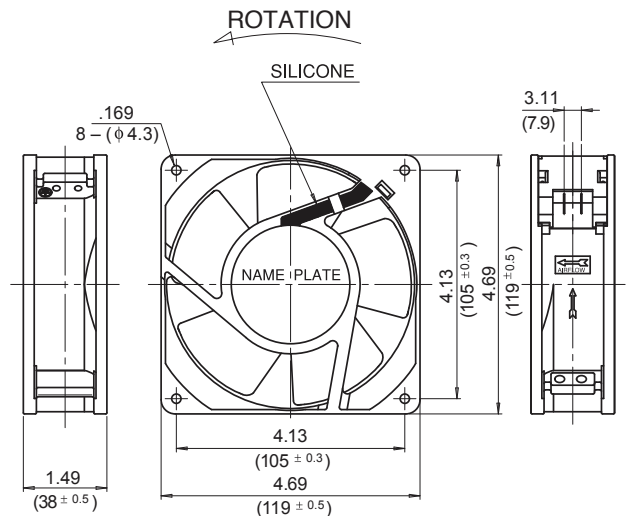

Specifications

	MODEL	LEGACY P/N	Rated Voltage	Frequency	Starting Voltage	Current	Input Power	Speed	Max. Air Flow		Max. Static Pressure		Noise	Mass
			(V)	(Hz)	(V)	(A) ^{*1}	(W)	(min ⁻¹) ^{*2}	CFM ^{*1}	(m³/min) ^{*2}	in H ₂ O	(Pa) ^{*2}	(dB) ^{*2}	(g)
**	11938TB-A0N-QA-00	4715TS-10T-B50-BM0	100	50	65	0.450	20.0	2600	98.84	2.80	0.352	88.0	46	650
			100	60	65	0.340	17.0	3100	116.49	3.30	0.400	100.0	50	650
	11938TB-A1N-QA-00	4715TS-12T-B50-AM0	115	50	75	0.390	21.0	2600	98.84	2.80	0.352	88.0	46	650
			115	60	75	0.300	17.0	3100	116.49	3.30	0.400	100.0	50	650
**	11938TB-B0N-QA-00	4715TS-20T-B50-BM0	200	50	130	0.220	21.0	2600	98.84	2.80	0.352	88.0	46	650
			200	60	130	0.170	17.0	3100	116.49	3.30	0.400	100.0	50	650
**	11938TB-B2N-QA-00	4715TS-22T-B50-BM0	220	50	145	0.200	20.0	2600	98.84	2.80	0.352	88.0	46	650
			220	60	145	0.150	17.0	3100	116.49	3.30	0.400	100.0	50	650
	11938TB-B3N-QA-00	4715TS-23T-B50-AM0	230	50	175	0.190	21.0	2600	98.84	2.80	0.352	88.0	46	650
			230	60	175	0.140	17.0	3100	116.49	3.30	0.400	100.0	50	650
**	11938TB-B4N-QA-00	4715TS-24T-B50-AM0	240	50	175	0.180	20.0	2600	98.84	2.80	0.352	88.0	46	650
			240	60	175	0.140	17.0	3100	116.49	3.30	0.400	100.0	50	650

Rotation: Counterclockwise

Airflow Outlet: Air Out Over Struts

** Contact NMB for Availability

*1: Maximum Values in Free Air

*2: Average Values in Free Air

*3: Minimum Values in Free Air