Write-On Safety Tags

- Meet OSHA Standard 1910.147 requirements for tagout applications
- Semi-rigid plastic tags are 3.00" (76.00mm) W x 5.75" (146.00mm) H with a .38" (9.00mm) brass grommet for greater strength and increased durability
- Tags can be attached with a lockout device or with a Panduit PLT2S nylon tie (50 lb. loop tensile strength) supplied with each tag
- PVT-* Package consists of five tags and five cable ties
- PVT-*-Q Package consists of 25 tags and 25 cable ties
- Can be clearly identified with Panduit permanent marking pens

Material Chart

Material	Print Method	Temperature Range	Features
Rigid Vinyl	Pre-Printed	-40°F to 150°F (-40°C to 66°C)	Indoor/outdoor rated; rigid material accepts ink; resistant to UV light, chemical atmosphere, and abrasion; excellent for applications where adhesives will not work.

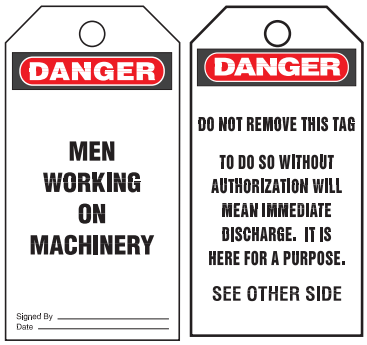

Front PVT-9-Q Back

Front PVT-15 Back

Front PVT-23 Back
PVT-23-Q

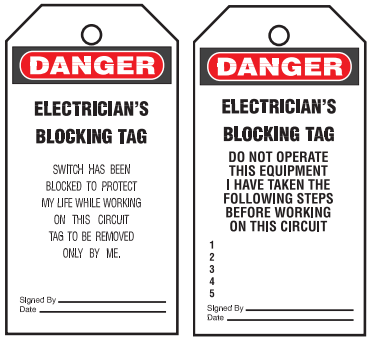

Front PVT-30 Back
PVT-30-Q

Front PVT-41 Back

Front PVT-42-Q Back

Order number of pieces required, in multiples of Standard Package Quantity.

Prime items appear in **BOLD**.

Write-On Safety Tags (continued)

Front PVT-43 Back

Front PVT-44 Back
PVT-44-Q

Front PVT-56-Q Back

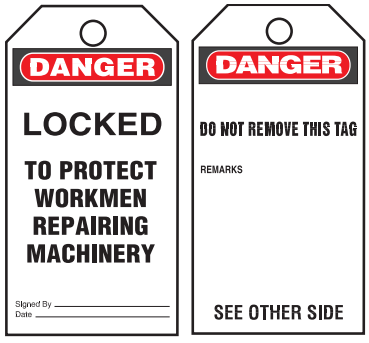

Front PVT-57-Q Back

Front PVT-62-Q Back

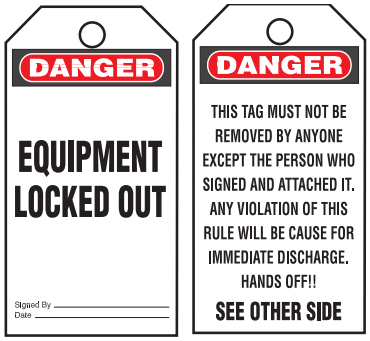

Front PVT-96 Back
PVT-96-Q

Front PVT-97 Back
PVT-97-Q

Front PVT-98 Back
PVT-98-Q

Front PVT-99 Back

Tags continue on page E5.16.

Write-On Safety Tags (continued)

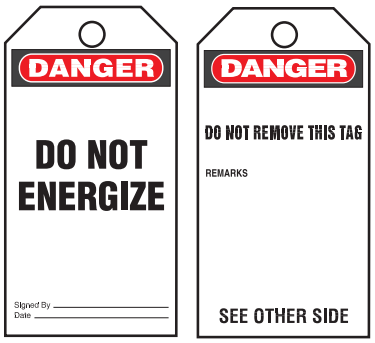

Front PVT-148-Q Back

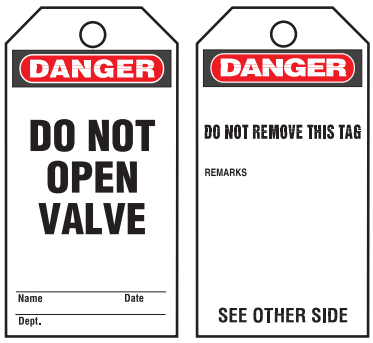

Front PVT-150-Q Back

Front PVT-153-Q Back

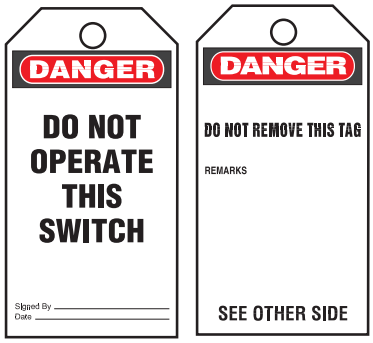

Front PVT-155-Q Back

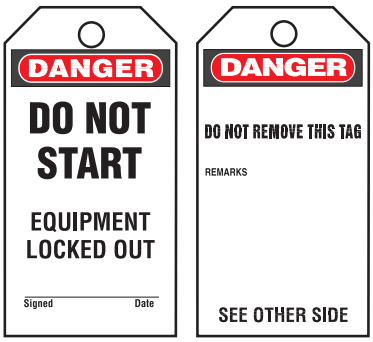

Front PVT-156-Q Back

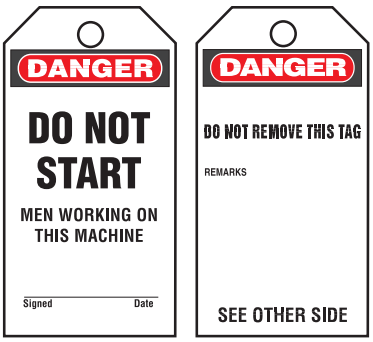

Front PVT-157-Q Back

Front PVT-158-Q Back

Front PVT-160-Q Back

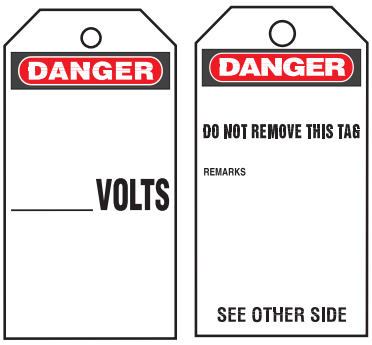

Front PVT-238-Q Back

Order number of pieces required, in multiples of Standard Package Quantity.

Prime items appear in **BOLD**.