## ABMQ Multiple Bridge Adhesive Backed Cable Tie Mounts

- Multiple cable tie bridges on one mount speeds installation of cable bundles by reducing the number of mounts applied
- Dovetail connection system provides alignment and a joining method to expand routing capabilities
- V-groove allows for easy separation into two mounts with two bridges each for separate applications

- 4-way cable tie bridges allow cable bundles to be secured perpendicular to the mount for even spacing or inline to secure a bundle in multiple places
- Large adhesive surface area provides long-term reliability and keeps product in place despite heavy load or high stress
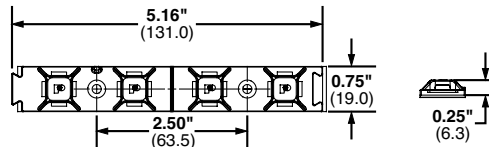
| Part Number | Used with Cable Ties | Material | Color | Environment | Mounting Method | Std. Pkg. Qty. | Std. Ctn. Qty. |
|---|---|---|---|---|---|---|---|
| ABMQS-A-C | M,I,S | ABS | White | Indoors | Rubber | 100 | 1000 |
| ABMQS-A-Q | | ABS | White | Indoors | Rubber | 25 | 250 |
| ABMQS-A-Q20 | | ABS | Black | Indoors | Rubber | 25 | 250 |

### ABMQ Mounts for Installation with Screws or User-Supplied Adhesive

| Part Number | Used with Cable Ties | Material | Color | Environment | Mounting Method | Std. Pkg. Qty. | Std. Ctn. Qty. |
|---|---|---|---|---|---|---|---|
| ABMQS-S6-C | M, I, S | ABS | White | Indoors/High Temp | Two #6 M3 Screws | 100 | 1000 |

‡Cable tie cross section sizes: M = Miniature, I = Intermediate, and S = Standard.

## Tak-Ty® Hook & Loop Cable Tie Mounts

- For use with hook and loop cable ties, see page B1.83, B1.84
- Unique cradle design provides maximum stability for cable bundle

- For indoor use only
- Dimensions: 1.10"L x 1.12"W x 0.34"H (27.9mm x 28.4mm x 8.6mm)
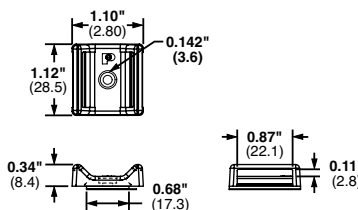
| Part Number | Used with Cable Ties‡ | Material | Color | Max. Static Load | | Mounting Method | Std. Pkg. Qty. | Std. Ctn. Qty. |
|---|---|---|---|---|---|---|---|---|
| | | | | Lbs. | g | | | |
| ABMT-A-C | HLT, HLS, TTS, UCT | Nylon 6.6 | Natural | 0.38 | 174 | Pre-Installed Rubber Adhesive | 100 | 1000 |
| ABMT-A-C20 | | | Black | | | | 100 | 1000 |
| ABMT-S6-C | | | Natural | — | — | #6 (M3) Screw | 100 | 1000 |
| ABMT-S6-C20 | | | Black | | | | 100 | 1000 |
| ABMT-S6-C60 | | Flame Retardant Nylon 6.6 | Black | | | | 100 | 1000 |
| ABMT-S6-C69 | | | Natural | | | | 100 | 1000 |

‡Cable tie cross section sizes: HLT = Tak-Ty™ Hook & Loop Ties, HLS = Tak-Ty™ Hook & Loop Strip Tie, TTS = Tak-Tape™ Roll, UCT = Ultra-Cinch™ Tie.
*For proper selection of adhesives see page B2.53.

A. System Overview

B1. Cable Ties

B2. Cable Accessories

B3. Stainless Steel Cable Ties & Accessories

C1. Wiring Duct

C2. Abrasion Protection

C3. Cable Management

D1. Terminals

D2. Power Connectors

D3. Grounding Connectors

E1. Labeling Systems

E2. Labels

E3. Pre-Printed & Write-On Markers

E4. Permanent Identification

E5. Industrial Safety Solutions

F. Keystone Cabling Systems

G. Part Number Index