THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:
1. APPLICATION TOOLS - GS4MT-E, PPTMT, ST2MT, HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 125 LBS. [556 NEWTONS] WHEN TESTED ON A 1.5" MANDREL.
3. BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS.
4. TOLERANCES:
   .XXX = ±.010 [.25]
   .XX = ±.02 [.5]
   .X = ±.03 [.8]
   ANGLES = ±2°
5. MATERIAL: 316L STAINLESS STEEL

PANDUIT PART NO.	MAX BUNDLE DIAMETER	PACKAGE QTY	LENGTH L=±.3 [7]
IMLT25S-C6L	1" [25]	100	5.0" [127]
IMLT51S-C6L	2" [51]	100	7.9" [201]
IMLT69S-C6L	2.7" [69]	100	10.2" [259]
IMLT102S-C6L	4" [102]	100	14.3" [362]
IMLT152S-C6L	6" [152]	100	20.5" [521]
IMLT203S-C6L	8" [203]	100	26.7" [679]
IMLT254S-C6L	10" [254]	100	33.0" [838]
IMLT304S-Q6L	12" [304]	25	39.3" [998]
IMLT355S-Q6L	14" [355]	25	45.5" [1156]
IMLT380S-Q6L	15" [380]	25	49.2" [1250]

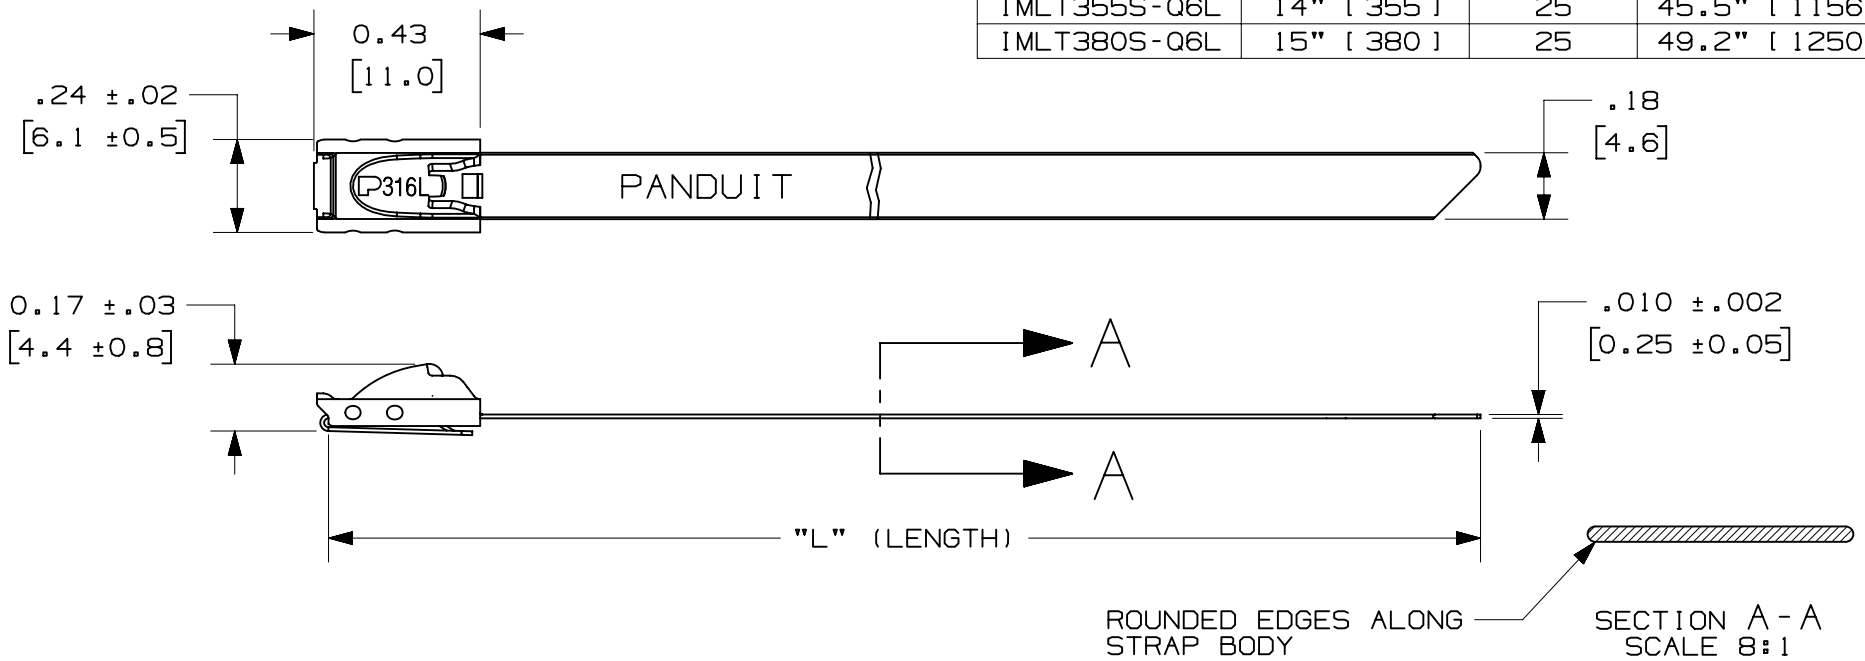

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
03A	02/02/22	JBN	MRJS	JADE	REVISED LENGTH TO 26.7" WAS 26.8" FOR P/N: IMLT203S-C6L	115557
02A	7/28/21	JBN	MRJS	JADE	REMOVED GS4MT AND ADDED GS4MT-E APPLICATION TOOLS	102878
01	1/16	JSUN	JSUN	RGRO	REMOVE A NOTE	LPECN_15L355BC_DC/01
00	1/16	JSUN	SKB	RGRO	INITIAL RELEASE	LPECN_15L355BC_DC/00

TITLE
IMLT STANDARD SINGLE LOOP ASSEMBLY 316L STAINLESS STEEL

CUSTOMER DRAWING

ITEM REVISION NAME: 15L355BC/03

DATASET FILE NAME: 15L355BC_DC/03A

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]

.X ± .XXX ±
.XX ± ANGLES ±

THIRD ANGLE PROJECTION

MATERIAL: 316L STAINLESS STEEL

DRAWING NUMBER: 15L355BC_DC

DRAWN BY	DATE	CHK	SCALE	SHT 1 OF 1	SIZE
JSUN	1/16	JSUN	N/A		A

D10100DA/20