

708M12 & 716M12 Managed Industrial Ethernet Switch

User Manual & Installation Guide

708M12 & 716M12 Industrial Ethernet Switch Installation Guide	5
708M12 & 716M12 Industrial Ethernet Switch Accessories.....	6
SAFETY WARNINGS	8
Ingress Protection IP67	10
Installation.....	10
Bulkhead Mounting.....	12
Front Panel	14
Applying Power	15
N-TRON 708M12 Grounding Techniques	16
N-TRON 716M12 Grounding Techniques	16
OVERVIEW OF ADVANCED FEATURES.....	18
Mode of Operation	18
Port Mirroring	18
Port Trunking	18
Quality of Service (QoS).....	18
Virtual LAN	19
Rapid Spanning Tree Protocol	20
SNMP Traps.....	20
IGMP Snooping	20
N-Ring.....	21
N-Link.....	21
CIP	21
DHCP	21
DHCP Client	22
DHCP Relay Agent	22
DHCP Server.....	22
LLDP.....	22
Port Security—MAC Address Based	22
XML Settings Download	22
Rate Limiting	22
Web Software Configuration	25
Web Management	25
Web Management - Home	26
Administration – System.....	28
Administration – SNMP.....	32
Administration – Fault	34
DHCP – Server – Setup Profiles	35
DHCP – Server – Setup IP Maps	37
DHCP – Server – View Bindings.....	43
DHCP – Relay & Local IP - Setup.....	44
LLDP - Configuration	46
LLDP - Ports	47
LLDP - Status.....	48
LLDP - Statistics	49
Ports – Configuration	50
Ports – MAC Security – Learning.....	52
Ports – MAC Security – Intruder Log	56
Ports – Mirroring.....	57
Ports – Trunking.....	59
Ports – QOS	60
Statistics – Port Statistics	62
Statistics – Port Utilization.....	63
VLAN – Configuration	64
Bridging – Aging Time	67
Bridging – Unicast Addresses	68
Bridging – Multicast Addresses	70
Bridging – Show MAC by Port.....	72
RSTP – Configuration.....	74
IGMP – Configuration	77

IGMP – RFilter	83
N-View – Configuration.....	85
N-View – Ports.....	86
N-Ring – Configuration	87
N-Ring – Advanced Configuration	90
N-Ring – Status	92
N-Link – Configuration.....	96
N-Link – Status	100
CIP – Configuration	105
CIP – Status.....	106
Firmware/Config – TFTP.....	107
Support – Web Site and E-mail.....	109
Rate Limiting Configuration	110
User Management – Adding Users	114
User Management – Removing Users.....	115
LogicalView.....	116
Configuration – Save or Reset.....	118
Help – Overview	119
Help – Administration.....	120
Help – DHCP	121
Help – LLDP	122
Help – Ports.....	123
Help – Statistics.....	124
Help – VLAN.....	125
Help – Bridging.....	126
Help – RSTP	127
Help – IGMP	128
Help – N-View	129
Help – N-Ring	130
Help – N-Link	131
Help – CIP.....	132
Help – Firmware/Config	133
Help – Rate Limiting.....	134
Help – User Management.....	135
Help – Other	136
CLI Commands	137
“?” (Help).....	137
Logout	137
Show, Add, or Delete ARL Entries.....	138
Save or Reset the Configuration Settings.....	139
Configuration Device Operations.....	140
Show or Set CIP Configuration.....	141
Show or Set IGMP Configuration.....	142
Show or Set Mirror Configuration	143
Show or Set N-Ring Configuration.....	144
Show or Set N-View Configuration	144
Ping a Host	145
Show or Set Port Configuration	146
Reset the Switch.....	146
Show or Set SNMP Configuration	147
Show or Clear the Last System Error	147
Show System Information.....	148
Set or Show the System IP Configuration.....	149
Show or Set System Configuration	150
VLAN Addition and Deletion Example.....	151
VLAN Configuration Examples	157
Example 1 – Basic understanding of port-based VLANs.....	157
Example 2 – Basic understanding of tagged VLANs (Admit – Tagged Only)	158
Example 3 – Basic understanding of tagged VLANs (Admit – All).....	159
Example 4 – Basic understanding of Hybrid VLANs	160
Example 5 – Basic understanding of Overlapping VLANs.....	161

Example 6 – Basic understanding of VLANs with Multicast Filtering.....	162
KEY SPECIFICATION – 708M12	163
KEY SPECIFICATION – 716M12	165
Appendix A. XML Settings File Example	167
N-TRON Limited Warranty	170

708M12 & 716M12 Industrial Ethernet Switch Installation Guide



The N-TRON 708M12 & 716M12 Industrial Ethernet Switch offers outstanding performance and ease of use. It is ideally suited for connecting Ethernet enabled industrial and or security equipment and is a fully managed switch.

PRODUCT FEATURES

- Full IEEE 802.3 Compliance
- Eight 10/100 BaseTX D Coded M12 Copper Ports (708M12)
- Sixteen 10/100 BaseTX D Coded M12 Copper Ports (716M12)
- Extended Environmental Specifications
- IP65 Rated for protection against low pressure jets of water from any direction
- IP66 Rated for protection against high pressure jets of water from any direction
- IP67 Rated for protection against temporary immersion in water
- Autosensing 10/100BaseTX, Duplex, and MDIX
- Offers Rapid Spanning Tree Protocol
- Trunk with other N-Tron trunking capable switches over two ports
- Store & Forward Technology
- Plug and Play IGMP Support
- Rugged Din-Rail Enclosure
- Redundant Power Inputs (10-30 VDC) (708M12)
- Redundant Power Inputs (10-49 VDC) (716M12)
- Web Browser Management with detailed ring map and fault location charting.
- Web Browsing and N-View Switch Monitoring

MANAGEMENT FEATURES

- SNMP v1, v2 and v3
- Configuration backup via Optional Configuration Device (NTCD)
- EtherNet/IP™ CIP Messaging
- IGMP Auto Configuration and Plug and Play Support
- 802.1Q tag VLAN and Port VLAN
- 802.1p QoS, Port QoS, and DSCP
- Trunk with other N-Tron trunking capable switches over two ports
- Mirroring
- N-RING™ (N-Tron proprietary Ring Management)
- N-LINK™ (N-Tron proprietary Coupling Management)
- 802.1d, 802.1w, 802.1D RSTP (Rapid Spanning Tree Protocol)
- DHCP Client, Server, Option 82 relay, Option 61
- Local Port IP Addressing
- Port Security—MAC Address Based
- 802.1AB™-2005 Link Layer Discovery Protocol (LLDP)
- XML Settings Download for some configuration parameters.
- Broadcast and/or Multicast Rate Limiting.



High Voltage Models Only

708M12 & 716M12 Industrial Ethernet Switch Accessories

 700-NTCD-M12	<u>Configuration Device</u> Ideal for saving, or restoring switch configuration parameters quickly without the need for a computer or software. Straight M12 A-Coded 4-pin male connector. Includes connection status LED. One configuration device per switch is recommended.
 SERIAL-DB9-M12	<u>Serial Interface Cable</u> See section “Serial Interface” for additional details.

Copyright, © N-Tron Corp., 2012
3101 International Drive East, Building 6
Mobile, AL 36606 USA

All rights reserved. Reproduction, adaptation, or translation without prior written permission from N-Tron Corp. is prohibited, except as allowed under copyright laws.

Ethernet is a registered trademark of Xerox Corporation. All other product names, company names, logos or other designations mentioned herein are trademarks of their respective owners.

The information contained in this document is subject to change without notice. N-Tron Corp. makes no warranty of any kind with regard to this material, including, but not limited to, the implied warranties of merchantability or fitness for a particular purpose. In no event shall N-Tron Corp. be liable for any incidental, special, indirect or consequential damages whatsoever included but not limited to lost profits arising out of errors or omissions in this manual or the information contained herein.

WARNING

ALERTE

Do not perform any services on the unit unless qualified to do so. Do not substitute unauthorized parts or make unauthorized modifications to the unit.

Ne pas effectuer de services sur l'appareil s'il n'est pas qualifié pour le faire. Ne pas remplacer les pièces non autorisées ou de modifications non autorisées de l'appareil.

Do not operate the unit with the top cover removed, as this could create a shock or fire hazard.

Ne pas faire fonctionner l'unité avec le couvercle retiré, ce qui pourrait créer une décharge électrique ou un incendie.

Do not operate the equipment in the presence of flammable gasses or fumes. Operating electrical equipment in such an environment constitutes a definite safety hazard.

Ne pas utiliser le matériel en présence de gaz ou de vapeurs inflammables. L'utilisation de matériel électrique dans un tel environnement constitue un danger certain.

Do not operate the equipment in a manner not specified by this manual.

Ne pas utiliser le matériel en présence de gaz ou de vapeurs inflammables. L'utilisation de matériel électrique dans un tel environnement constitue un danger certain.

Do not service the equipment without first disconnecting the power connector.

Ne pas réparer l'équipement sans d'abord débrancher le connecteur d'alimentation.

SAFETY WARNINGS

AVERTISSEMENTS DE SÉCURITÉ

GENERAL SAFETY WARNINGS

GÉNÉRAL AVERTISSEMENTS DE SÉCURITÉ

WARNING: If the equipment is used in the manner not specified by N-Tron Corporation, the protection provided by the equipment may be impaired.

ALERTE : Si l'équipement est utilisé d'une manière non spécifiée par N-Tron Corporation, la protection fournie par l'équipement peut être compromise.

Contact Information

N-Tron Corp.
3101 International Drive East
Building 6
Mobile, AL 36606
TEL: (251) 342-2164
FAX: (251) 342-6353
WEBSITE: www.n-tron.com
E-MAIL: N-TRON_Support@n-tron.com

ENVIRONMENTAL SAFETY



WARNING: Disconnect the power and allow to cool 5 minutes before touching.

ALERTE: Déconnectez le câble d'alimentation et laissez refroidir 5 minutes avant de la toucher.

WARNING: Must be installed in a pollution degree 2 environment.

ALERTE: Doit être installé dans un degré de pollution 2 environnement.

ELECTRICAL SAFETY



WARNING: Disconnect the power cable before removing any enclosure panel.

ALERTE: Débrancher le câble d'alimentation avant de retirer le panneau du châssis.

WARNING: Do not operate the unit with the any cover removed.

ALERTE: Ne pas utiliser l'appareil avec n'importe quel couvercle retiré.

WARNING: Properly ground the unit before connecting anything else to the unit. Units not properly grounded may result in a safety risk and could be hazardous and may void the warranty. See the grounding technique section of this user manual for proper ways to ground the unit.

ALERTE: Correctement à la terre de l'unité avant tout raccordement à l'unité. Unités pas correctement mise à la terre peut entraîner un risque de sécurité et pourraient être dangereux et peut annuler la garantie. Voir la section technique de mise à la terre de ce mode d'emploi des moyens appropriés à la masse de l'appareil.

WARNING: Never install or work on electrical equipment or cabling during periods of lightning activity.
ALERTE: Ne jamais installer ou de travailler sur un équipement électrique ou de câblage pendant les périodes d'activité de la foudre.

WARNING: Do not perform any services on the unit unless qualified to do so.
ALERTE: Ne pas effectuer de services sur l'appareil s'il n'est pas qualifié pour le faire.

WARNING: Observe proper DC Voltage polarity when installing power input cables. Reversing voltage polarity can cause permanent damage to the unit and void the warranty.
ALERTE: Respecter la polarité correcte de tension DC lors de l'installation des câbles d'alimentation d'entrée. Inversion de polarité de tension peut causer des dommages permanents à l'appareil et annule la garantie.

WARNING: Explosion Hazard – Substitution of components may impair suitability for Class I, Division 2.
ALERTE: Risque d'explosion - Remplacement d'un composant peut empêcher la conformité de Classe I, Division 2.

WARNING: Explosion Hazard - Do not connect or disconnect any connections while circuit is live unless area is known to be non-hazardous.
ALERTE: Risque d'explosion - Ne pas brancher ou débrancher les connexions lorsque le circuit est sous tension sauf si la zone est connue pour être non dangereux.

WARNING: Use 110°C or higher rated copper wire, (0.22Nm) 2lb/in tightening torque for field installed conductors.
ALERTE : Utilisez 110 ° C ou fil de cuivre de niveau plus élevé, (0.22Nm) 2lb/in couple de serrage pour les conducteurs installés sur le terrain.

WARNING: For redundant applications both inputs must be provided from the same Class 2 source.
ALERTE : Pour les applications redondantes deux entrées doivent être fournis à partir de la même classe 2 la source.

Ingress Protection IP67

The classification of degrees of protection provided by the enclosures is defined by IEC 60529. Each rating is defined by specific tests.

The IP number is comprised of two numbers, the first referring to the protection against solid objects and the second against fluids. The higher the number, the better the device is protected against contact with moving parts and the harmful entry of various forms of moisture.

1 st IP	Protection against ingress of solids	2 nd IP	Protection against ingress of liquids
0	No protection	0	No protection
1	Protected against solid objects over 50mm e.g. hands, large tools.	1	Protected against vertically falling drops of water.
2	Protected against solid objects over 12mm e.g. hands, large tools.	2	Protected against direct sprays of water up to 15° from vertical.
3	Protected against solid objects over 2.5mm e.g. wire, small tools.	3	Protected against direct sprays of water up to 60° from vertical.
4	Protected against solid objects over 1.0mm e.g. wires.	4	Protected against water sprayed from any direction. Limited ingress permitted.
5	Limited protection against dust ingress (no harmful deposit)	5	Protected against low pressure water jets from any direction. Limited ingress permitted.
6	Totally protected against dust ingress.	6	Protected against high pressure water jets from any direction. Limited ingress permitted.
		7	Protected against temporary immersion between 15cm to 1m.
		8	Protected against long periods of immersion under pressure.

The 708M12 & 716M12 Industrial Ethernet Switches are fully protected against dust and will remain sealed when immersed in water to a depth of 1 meter for 1 hour when all the ports are properly mated or sealed.



These IP67 caps seal off the unused ports protecting them from dirt, water, oil or any other contaminants which might be present in the close proximity of the switch.

Please make sure the Ethernet Switch package contains the following items:

1. 708M12 or 716M12 Industrial Ethernet Switch
2. Product CD

Contact your carrier if any items are damaged.

Installation

Read the following warning before beginning the installation:
Lire l'avertissement suivant avant de commencer l'installation:

WARNING

ALERTE



Never install or work on electrical equipment or cabling during periods of lightning activity. Never connect or disconnect power when hazardous gasses are present.

Ne jamais installer ou de travailler sur un équipement électrique ou de câblage pendant les périodes d'activité de la foudre. Ne jamais brancher ou débrancher l'alimentation en gaz dangereux sont présents.

Disconnect the power cable before removing any enclosure panel.

Débrancher le câble d'alimentation avant de retirer le panneau du châssis.

WARNING: Observe proper DC Voltage polarity when installing power input cables. Reversing voltage polarity can cause permanent damage to the unit and void the warranty.

ALERTE: Respecter la polarité correcte de tension DC lors de l'installation des câbles d'alimentation d'entrée. Inversion de polarité de tension peut causer des dommages permanents à l'appareil et annule la garantie.

WARNING: Use 110°C or higher rated copper wire, (0.22Nm) 2lb/in tightening torque for field installed conductors.

ALERTE : Utilisez 110 ° C ou fil de cuivre de niveau plus élevé, (0.22Nm) 2lb/in couple de serrage pour les conducteurs installés sur le terrain.

WARNING: For redundant applications both inputs must be provided from the same Class 2 source.

ALERTE : Pour les applications redondantes deux entrées doivent être fournis à partir de la même classe 2 la source.

UNPACKING


Remove all the equipment from the packaging, and store the packaging in a safe place. File any damage claims with the carrier.

CLEANING


Clean only with a damp cloth.

Bulkhead Mounting

The following are the mechanical dimensions and drill hole placements to consider when mounting the 708M12 & 716M12 Industrial Ethernet Switches within an enclosure:

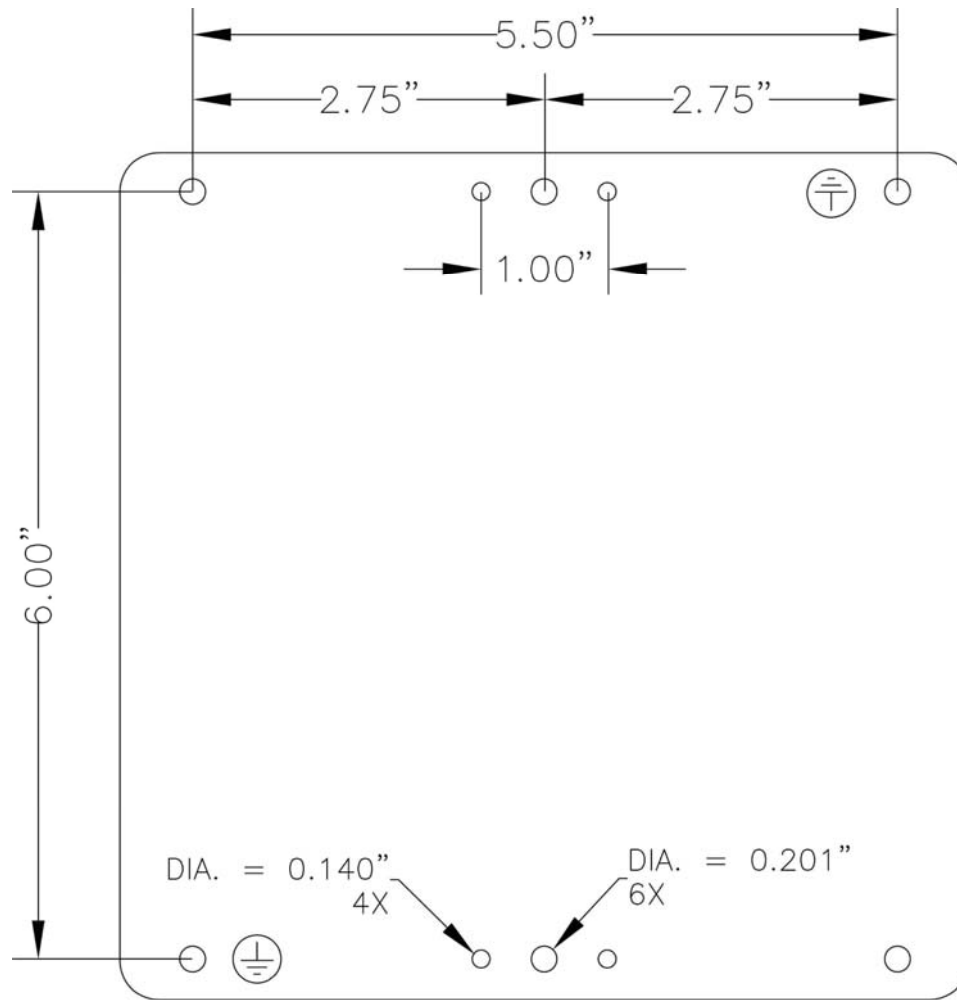

708M12

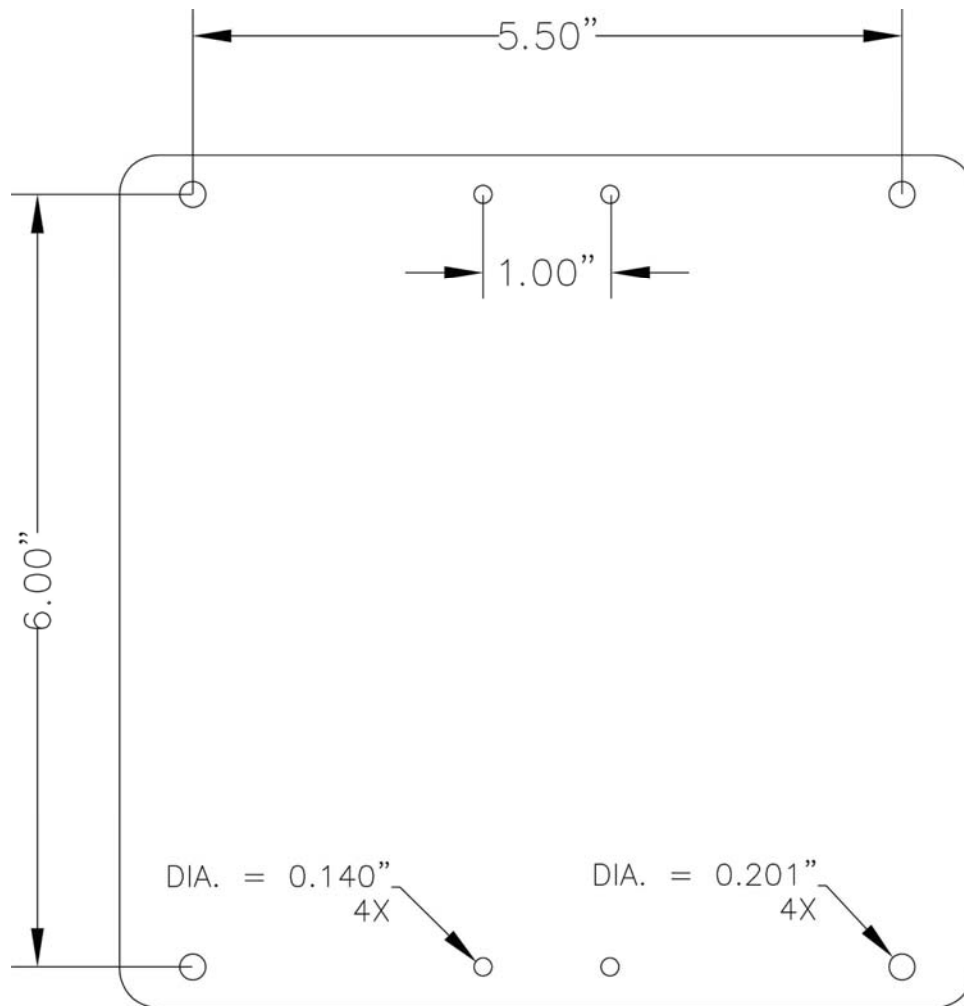

716M12

Front Panel



LNK/ACT

M12 D-Coded Female Ports

M12 A-Coded Male Port



M12 A-Coded Female Port

M12 A-Coded Female Port

Link/Activity LED

All 8 or 16 ports are Auto sensing 10/100BaseTX

Redundant Power Input (10-30VDC, 708M12); (10-49VDC, 716M12)

Green LED lights when Power is connected


Serial COM Port (CLI)

NTCD-M12 (N-Tron Configuration Device)


LED's: The table below describes the operating modes:

LED	Color	Description
	GREEN	Power is Applied with no active faults.
	RED	Power is Applied with an active fault.
	OFF	Power is not Applied.
LNK	ON	Link established.
	OFF	No link established.
ACT	BLINKING	Link established, Activity on cable.
	OFF	No link established.

Applying Power

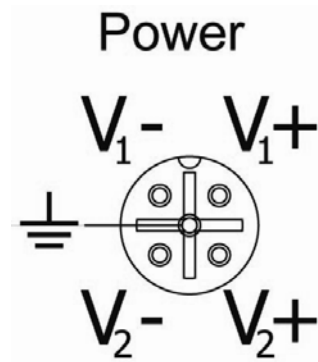

708M12

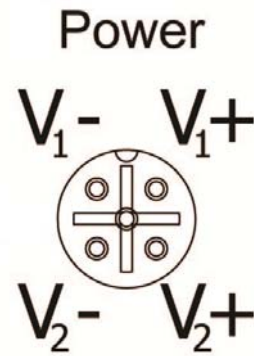

716M12

The M12 A coded power connector is keyed, where the mating connection from the power supply can be made only when the male and female ends are lined up properly. When the power is first connected all LED's will flash ON Momentarily. Verify the Power LED stays ON (GREEN).


Note: Either V_1 or V_2 can be connected to power for minimal operation. For redundant applications both inputs must be provided from the same Class 2 source. The power cord should be limited to less than 10 meters in order to ensure optimum performance.

Recommended 24V DC Power Supplies, similar to:

100VAC/240VAC:


N-Tron NTPS-24-1.3, DC 24V/1.3A

N-TRON 708M12 Grounding Techniques

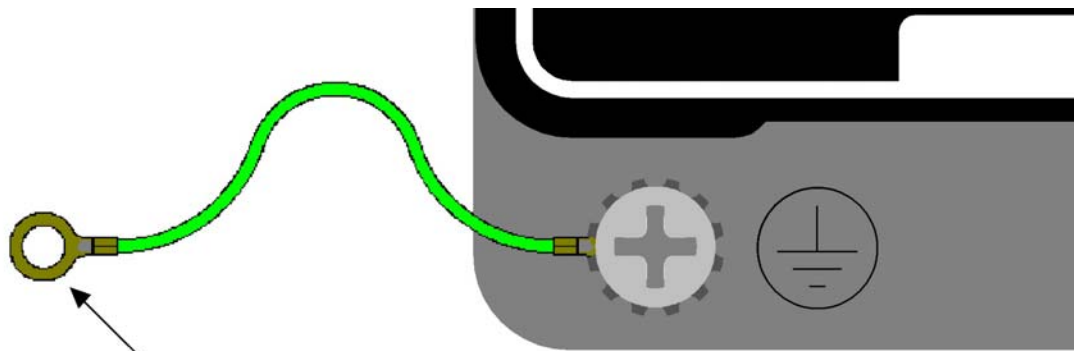

Drain wire with lug connecting switch chassis to known grounding point.

N-TRON 716M12 Grounding Techniques

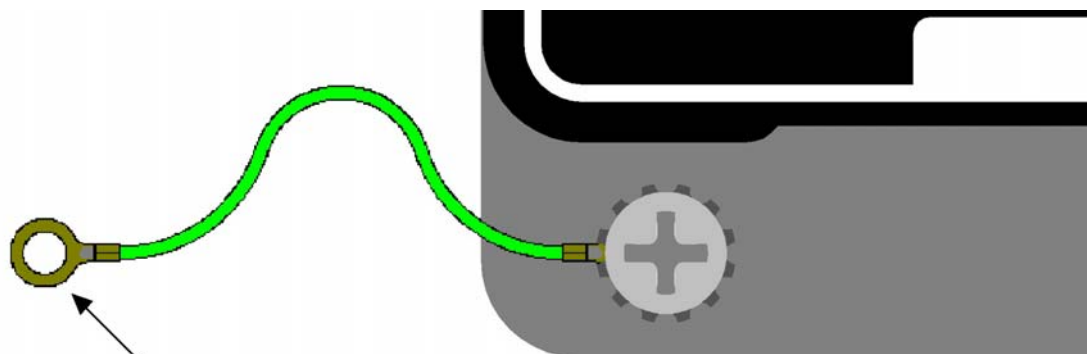

Drain wire with lug connecting switch chassis to known grounding point.


CONNECTING THE UNIT

For 10Base-T ports, plug a Category 3 (or greater) twisted pair cable into the M12 connector. For 100Base-T ports, plug a Category 5 (or greater) twisted pair cable into the M12 connector. Connect the other end to the far end station. Verify that the LNK LED's are ON once the connection has been completed. To connect any other port to another Switch or Repeater, use a standard Cat5 straight through or crossover cable.

Warning: Creating a port to port connection on the same switch (i.e. loop) is an illegal operation and will create a broadcast storm which will crash the network!

SERIAL INTERFACE

The 708M12 & 716M12 Switch provides an EIA-232 interface accessed via an A Coded female connector (labeled 'COM' on the unit). This is used to access the Command Line Interpreter (CLI). The pin-outs are shown below:

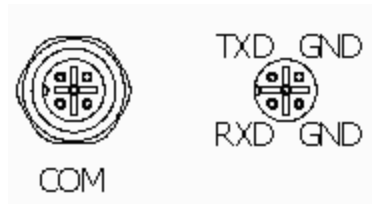

SERIAL-DB9-M12

Serial Cable

Connect the serial COM port of your PC and the 708M12 or 716M12 Switch using N-Tron's SERIAL-DB9-M12 serial cable. You will require a cable with a 9-pin or 25-pin sub-D female connector for the PC end, and a 4-Pin A Coded M12 Male connector for the 708M12 or 716M12 end.

The following table shows the pin-out and the connections for both types of cable:

PC Port	25-Pin Female	9-Pin Female	708M12 or 716M12 4-Pin A Coded M12 Male	
Signal Name	Pin #	Pin #	Pin #	Signal Name
TXD	2	3	2	RXD
RXD	3	2	1	TXD
GND	7	5	3/4	GND

HyperTerminal

The following configuration should be used in HyperTerminal:

Port Settings: **115200**
Data Bits: **8**
Parity: **NONE**
Stop bits: **1**
Flow Control: **NONE**

OVERVIEW OF ADVANCED FEATURES

Mode of Operation

Each port on the switch can be configured into different modes of operation as shown below:

Copper Ports:

- Half Duplex
- Full Duplex
- Auto Negotiation

100Base Fiber Ports:

- Full Duplex

Half Duplex

In half duplex mode, the CSMA/CD media access method is the means by which two or more stations share a common transmission medium. To transmit, a station waits (defers) for a quiet period on the medium (that is, no other station is transmitting) and then sends the intended message in bit-serial form. If, after initiating a transmission, the message collides with that of another station, then each transmitting station intentionally transmits for an additional predefined period to ensure propagation of the collision throughout the system. The station remains silent for a random amount of time (back-off) before attempting to transmit again.

Full Duplex

Full duplex operation allows simultaneous communication between a pair of stations using point-to-point media (dedicated channel). Full duplex operation does not require that transmitters defer, nor do they monitor or react to receive activity, as there is no contention for a shared medium in this mode.

Auto Negotiation

In Auto Negotiation mode, the port / hardware detects the mode of operation of the station that is connected to this port and sets its mode to match the mode of the station.

Port Mirroring

A Mirroring Port is a dedicated port that is configured to receive the copies of Ethernet frames that are being transmitted out and also being received in from any other port that is being monitored. 'Mirrored Data Only' can be selected and this selects for mirrored data only to be transmitted to the destination port, as opposed to mirrored data and whatever other data is otherwise destined for the destination Port.

Port Trunking

Port Trunking is the ability to group two network ports to increase the bandwidth between two machines (switch or any work station). This feature allows grouping of high-speed connectivity and provides redundant connection between switches, so that a trunk can act as a single link between the switches.

Quality of Service (QoS)

Quality of service (QoS) refers to resource reservation control mechanisms. Quality of service is the ability to provide different priority to different applications, users, or data flows. Quality of service guarantees are important if the network capacity is insufficient, especially for real-time streaming multimedia applications

such as voice over IP, online games and IP-TV, since these often require fixed bit rate and are delay sensitive, and in networks where the capacity is a limited resource, for example in cellular data communication. In the absence of network congestion, QoS mechanisms are not required. Each of these three QoS methods below is included or not based on the settings on the relevant browser page:

- 1) Force High Priority (Port Based),
- 2) IEEE802.1p (Tagged QOS), or
- 3) DSCP (differentiated services code points) (RFC 2474).

When Force High Priority is enabled, the port based priority is included in the decision for all ports and all frames received on a port will use the default QOS priority for that port in the decision. For example, if it is desired to have ingress frames on a port egress to the highest priority transmit queue regardless of other factors, then enable Force High Priority and the port's Priority will be 7.

Virtual LAN

The switch provides support for setting up tagged Virtual LANs (Local Area Networks). A port may belong to any number of Virtual LANs. The VLAN membership of a device is determined by the VLAN(s) that have been defined for the port to which the device is connected. If a device should move from one port to another, it loses its current VLAN membership and inherits that of the new port it is connected to.

VLANs facilitate easy administration of logical groups of devices that can communicate as if they were on the same LAN. **Traffic between VLANs is restricted, unless the ports are explicitly configured as overlapping VLANs.** Switches forward unicast, multicast, and broadcast traffic only on LAN segments that serve the VLAN to which the traffic belongs.

A Default Virtual LAN (VID=1) exists to which a port, which is not a member of any other Virtual LAN, will belong. This allows the switch to operate as a 'normal' switch when it is used in a network. A port is automatically removed from the Default VLAN when it is reconfigured to belong to another Virtual LAN, because that is the most common operation. But, if desired, the port can be included in VLAN 1 by configuring VLAN 1 last.

If switch ports are configured to transmit and receive untagged frames, end devices are able to communicate throughout the LAN. Using Tagged VLANs, the switch has the ability to take non-tagged packets in some ports, add a VLAN tag to the packet and send it out tagged ports on the switch. The VLANs can also be configured to accept tagged packets in tagged ports, strip the tags off the packets, and send the packets back out other untagged ports. This allows a network administrator to set up the switch to support devices on the network that do not support VLAN Tagged packets. The administrator can also set up the ports to discard any packets that are tagged or to discard any packets that are untagged based on a hybrid VLAN of both tagged and untagged ports, and using the VLAN Ingress Filter on the switch.

For each switch port there is one and only one PVID (port VLAN ID) setting. If an incoming frame is untagged and untagged frames are being accepted, then that frame will inherit the tag of the PVID value for that port. Subsequent switch routing and treatment will be in accordance with that VLAN switch map. By configuring PVIDs properly and configuring for all frames to exit untagged, the switch can achieve a 'port VLAN' configuration in which all frames in and out can be untagged, thus not requiring external devices to be VLAN cognizant.

To understand how a VLAN configuration will perform, first look at the port on which the frame enters the switch, then the VLAN ID (if the frame is tagged) or the PVID (if the frame is untagged). The VLAN

defined by the VID or PVID defines a VLAN group with a membership of ports. This membership determines whether a port is included or excluded as to frame egress from the switch.

The 708M12 & 716M12 Series switches also have the ability to allow overlapping VLANs. Overlapping VLANs give the user the ability to have one or more ports share two or more VLAN groups. For more information and examples on how this could be implemented, please see the ‘VLAN Configuration Examples’ in this document, and/or our website’s technical documents. Note that RSTP on overlapping VLANs is not supported and the system will automatically disable RSTP on all but the lowest VID VLANs that have overlapping ports.

Rapid Spanning Tree Protocol

The Rapid Spanning Tree Protocol as specified in IEEE 802.1D-2004 is supported. One Spanning Tree per non-overlapping VLAN is supported. The Rapid Spanning Tree Protocol (RSTP) supersedes the Spanning Tree Protocol (STP) which was described in IEEE 802.1D-1998. The RSTP is used to configure a simply connected active network topology from the arbitrarily connected bridges of a bridged network. Bridges effectively connect just the LANs to which their forwarding ports are attached. Ports that are in a blocking state do not forward frames. The bridges in the network exchange sufficient information to automatically derive a spanning tree.

RSTP allows for much quicker learning of network topology changes than the older STP. RSTP supports new and improved features such as rapid transition to forwarding state. RSTP also sends out new BPDUs every hello time instead of just relaying them. RSTP interoperates with older STP switches by falling back to the older STP when the older BPDUs are detected on bridge ports. The user can also manually configure bridge ports to use the older STP when desired.

SNMP Traps

The 700 Series switch supports up to 5 SNMP Trap Stations to which SNMP Traps will be sent. The switch supports five standard traps; Link Up, Link Down, Cold Start, Warm Start and Authentication Errors. SNMP Traps will be sent to all the trap stations configured on the switch when the corresponding trap is enabled.

IGMP Snooping

IGMP Snooping is enabled by default, and the switch is *Plug and Play* for IGMP. IGMP snooping provides intelligent network support for multicast applications. In particular, unneeded traffic is reduced. IGMP Snooping is configured via the web console and if enabled, operates dynamically upon each power up. Also, there can be manual only or manual and dynamic operation. Note that “static multicast group address” can be used whether IGMP Snooping is enabled or not.

IGMP Snooping will function dynamically without user intervention. If some of the devices in the LAN do not understand IGMP, then manual settings are provided to accommodate them. The Internet Group Management Protocol (IGMP) is a protocol that provides a way for a computer to report its multicast group membership to adjacent ‘routers’. In this case N-Tron 700 Series switches provide *router-like functionality*. Multicasting allows one computer to send content to multiple other computers that have identified themselves as interested in receiving the originating computer’s content. Multicasting can be used to transmit only to an audience that has joined (and not left) a multicast group membership. IGMP version 2 is formally described in the Internet Engineering Task Force (IETF) Request for Comments (RFC) 2236. IGMP version 1 is formally described in the Internet Engineering Task Force (IETF) Request for Comments (RFC) 1112. The 700 Series supports v1 and v2.

N-Ring

N-Ring is enabled by default, and the switch is *Plug and Play* for N-Ring except that initially one must enable an N-Ring enabled device to be the N-Ring Manager for a given N-Ring. Subsequently, N-Ring operates dynamically upon each power up. Using N-Tron's proprietary N-Ring technology offers expanded ring size capacity, detailed fault diagnostics, and a standard healing time of 30ms. The N-Ring Manager periodically checks the health of the N-Ring via health check packets. If the N-Ring Manager stops receiving the health check packets, it times out and converts the N-Ring to a backbone within 30ms. When using all N-Ring enabled switches in the ring, a detailed ring map and fault location chart is also provided on the N-Ring Manager's web browser. N-Ring status is also sent from the N-Ring Manager to the N-View OPC Server to identify the health status of the ring. Up to 250 N-Ring enabled switches can participate in one N-Ring topology. Switches that do not have N-Ring capability may be used in an N-Ring, however the ring map and fault location chart cannot be as detailed at these locations.

N-Link

The purpose of N-Link is to provide a way to redundantly couple an N-Ring topology to one or more other topologies, usually other N-Ring topologies. Each N-Link configuration requires 4 switches: N-Link Master, N-Link Slave, N-Link Primary Coupler, and N-Link Standby Coupler. N-Link will monitor the link status of the Primary and Standby Coupler links. While the Primary Coupler link is healthy, it will forward network traffic and the Standby Coupler link will block network traffic. When a problem is detected on the Primary Coupler link, the Primary Coupler link will block network traffic and the Standby Coupler link will forward network traffic. While the N-Link Master and Slave are in communication via the Control link, only one Coupler link (Primary or Standby) will forward network traffic while the other Coupler link will block network traffic.

CIP

The CIP (Common Industrial Protocol) feature allows N-Tron switches to directly provide switch information and configuration access to Programmable Logic Controller (PLC) and Human Machine Interface (HMI) applications via a standardized communication protocol. For example, a PLC may be programmed to monitor port links or N-Ring status and cause a status indicator to turn red on an HMI if a port goes link down or if N-Ring has a fault. CIP is formally described in ODVA Publication Number PUB00001 (Volume 1: Common Industrial Protocol (CIP™)), and Publication Number: PUB00002 (Volume 2: EtherNet/IP Adaptation of CIP). N-Tron provides EDS and ICO files. N-TRON_CIP_Tags.pdf is for a particular environment, but reveals the tags available.

DHCP

The Dynamic Host Configuration Protocol (DHCP) provides configuration parameters to Internet hosts. DHCP is built on a client-server model, where designated DHCP server hosts allocate network addresses and deliver configuration parameters to dynamically configured hosts. DHCP is controlled by RFC 2131. The N-Tron DHCP Switch can be configured to be a DHCP Client. Alternately the N-Tron DHCP switch can be configured to be a DHCP Server, a DHCP Relay Agent, or both.

For more detailed information on N-Tron DHCP features, reference: http://www.n-tron.com/tech_docs.php. Under 'White papers', see. "Using DHCP to Minimize Equipment Setup Time". Under 'Installation Guides and User Manuals' see "DHCP Technical Instructions for 708 / 716/ 7018 / 7506 Series".

DHCP Client

The switch will automatically obtain an IP assignment from a DHCP Server, or optionally Fallback to a configured IP assignment if unable to get an IP assignment from a DHCP server. Communication between the client and server can optionally go through a DHCP Relay Agent.

DHCP Relay Agent

DHCP Relay Agent (Option 82) allows communication between the client and server to cross subnet and VLAN boundaries. It also allows for a device on a specific port to receive a specific IP address and if the device is replaced, the replacement receives the same IP address as the original device.

DHCP Server

DHCP Server allows DHCP Client devices to automatically obtain an IP assignment. IP assignments can be set up as a dynamic range of IP addresses available to any client device; or specific IP addresses based on the clients MAC address, Client ID (Option 61), or Relay Agent connection (Option 82).

LLDP

Link Layer Discovery Protocol (LLDP) is a Layer 2 discovery protocol that allows devices attached to an IEEE802 LAN to advertise to other devices the major capabilities they have and to store information they discover in a MIB that can be accessed through SNMP. LLDP is formally described in IEEE Standard - 802.1AB.

Port Security—MAC Address Based

The Port Security feature restricts access to the switch by only accepting dynamically learned MAC addresses and manually entered MAC addresses as authorized. Dynamically learned MAC addresses are those that the switch detects on any port while in 'Learning' mode. A manually entered MAC address must designate the ports that the address is authorized on. A non-authorized MAC address will be discarded and will be shown on the intruder log. Locking can be selected or not port by port.

XML Settings Download

XML settings can be downloaded to a switch to achieve some switch configurations. XML settings cover a subset of the settings available through the web browser. Reference *Appendix A. XML Settings File Example* for the complete set of configurations that can be done using XML Settings Download. There are several top level configuration sections and each of these sections is optional. Some sections have a 'keep or delete' choice such that one can load only those in the XML file deleting the pre-existing of those particular settings or one can add the settings in the XML file to the already existing settings. The example also shows field character limits, and provides other guidance.

Rate Limiting

Some systems generate a large amount of broadcast or multicast traffic occasionally. When it happens, the entire network may experience failures that persist until there is manual intervention. One way to address this problem is to control the broadcast or multicast traffic to remain below a user configured maximum limit. The most effective limit may be best obtained in test. Thus the user is provided with the capability to 'tune' the limit by switch port. These are ingress filters. The percentage values are repeatable to the purpose

and rise or fall as compared to each other, but are not meant to be as exact as in a piece of calibrated test equipment.

TROUBLESHOOTING

1. Make sure the  (Power LED) is ON.
2. Make sure you are supplying sufficient current for the version chosen. Note: The Inrush current will exceed the steady state current by ~ 2X.
3. Verify that Link LEDs are ON for connected ports.
4. Verify cabling used between stations.
5. Verify that cabling is Category 5E or greater for 100Mbit operation.

SUPPORT

Contact N-Tron Corp. at:

TEL: 251-342-2164

FAX: 251-342-6353

E-MAIL: N-TRON_Support@n-tron.com

WEB: www.n-tron.com

FCC STATEMENT

This product complies with Part 15 of the FCC-A Rules.

Operation is subject to the following conditions:

- (1) This device may not cause harmful Interference
- (2) This device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Operation of this device in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his/her own expense.

INDUSTRY CANADA


This Class A digital apparatus meets all requirements of the Canadian Interference Causing Equipment Regulations. Operation is subject to the following two conditions; (1) this device digital apparatus meets all requirements of the Canadian Interference Causing Equipment Regulations. Operation is subject to the following two conditions; (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Cet appareillage numérique de la classe A répond à toutes les exigences de l'interférence canadienne causant des règlements d'équipement. L'opération est sujette aux deux conditions suivantes: (1) ce dispositif peut ne pas causer l'interférence nocive, et (2) ce dispositif doit accepter n'importe quelle interférence reçue, y compris l'interférence qui peut causer l'opération peu désirée.

Web Software Configuration

Web Management


Enter the switch's IP address in any web browser and login to the web management feature of the 700 Series.

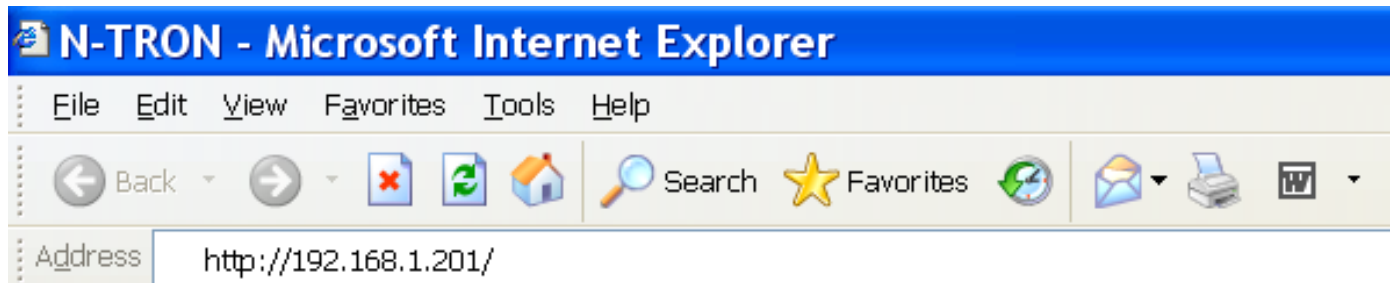

Default:


User Name: **admin**

Password: **admin**

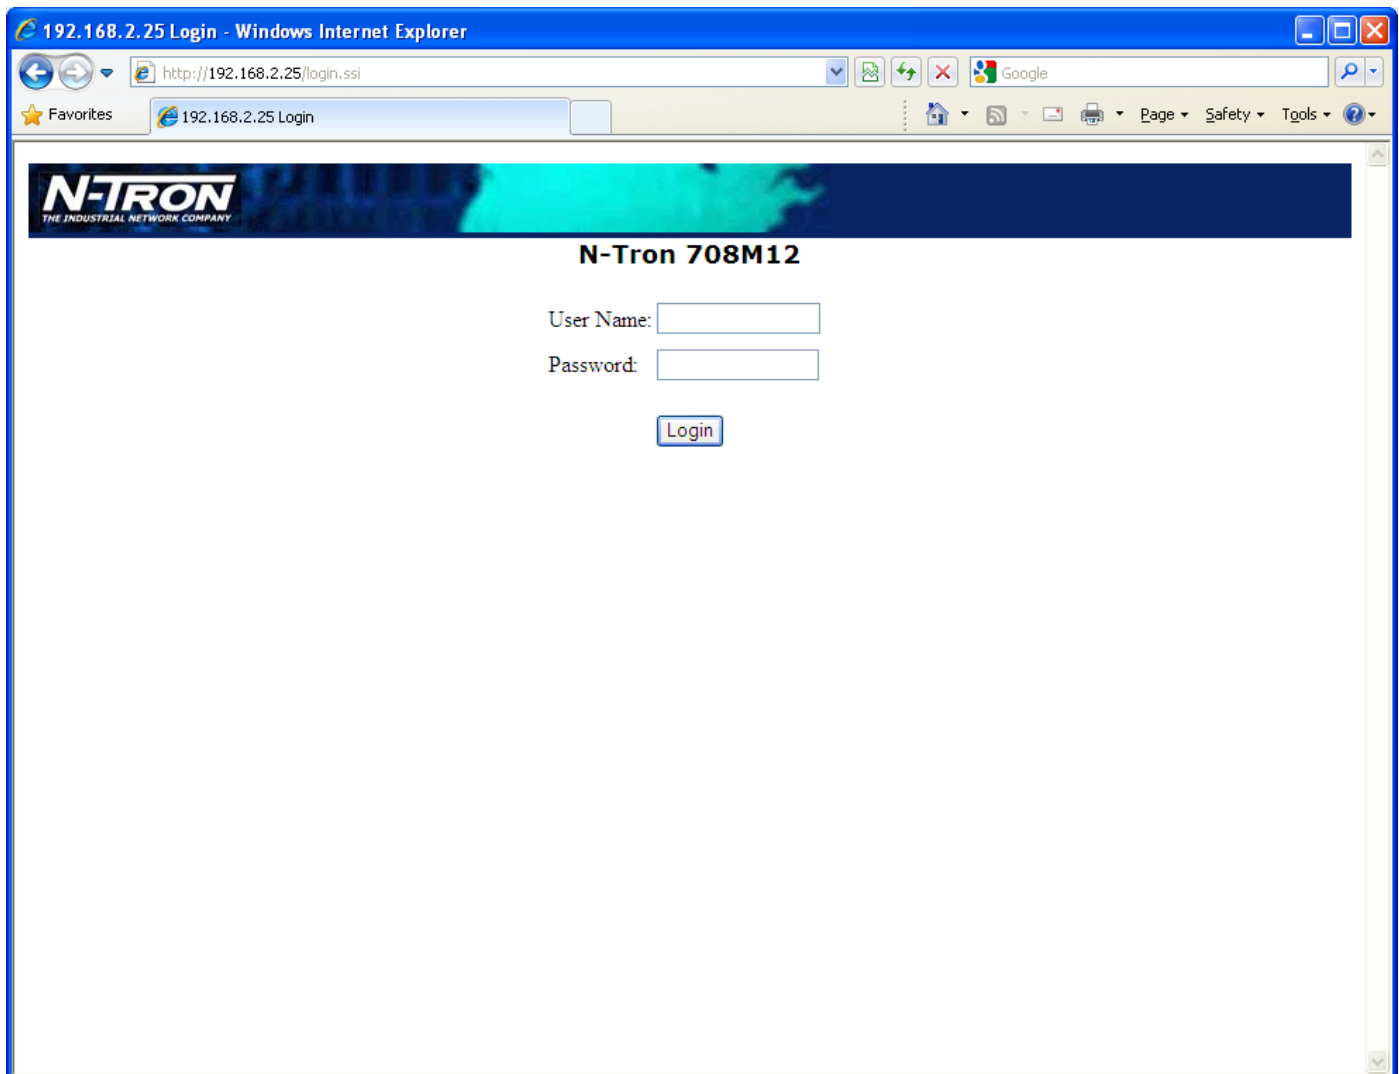

Web Management - Home

When the administrator first logs onto a 700 Series switch the default home page will be displayed. On the left hand side of the screen there is a list of configurable settings that the 700 Series switch will support. This section of the manual will go through each and every choice listed on the left hand side of the screen and explain how to configure those settings. In the center of the main home page the administrator can see some basic information like what firmware revision the switch is running. The firmware can be upgraded at a later time in the field using TFTP.

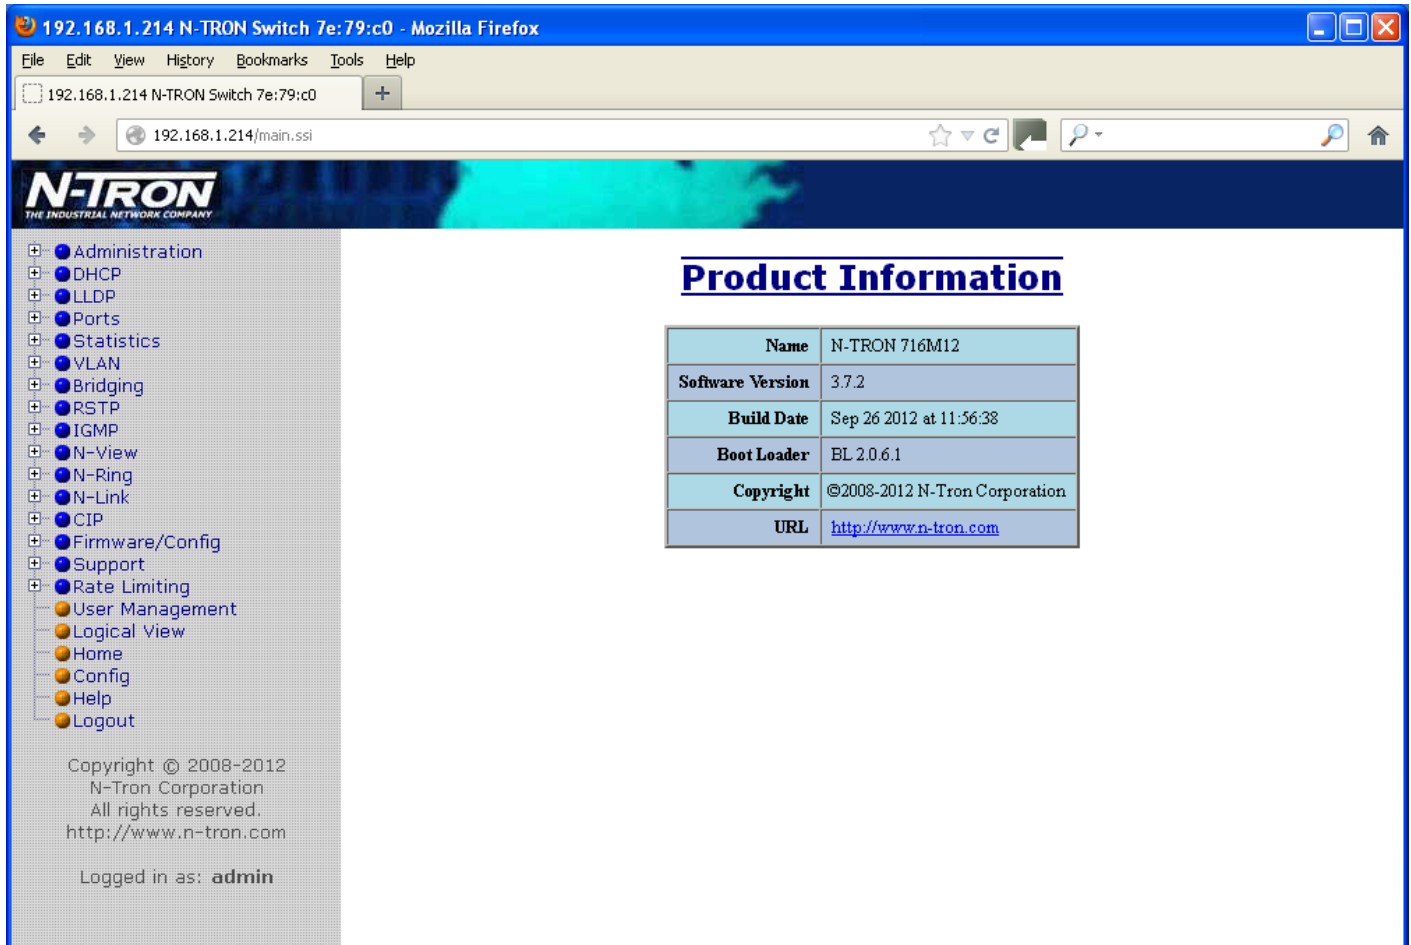


Name	N-TRON 716M12
Software Version	3.7.2
Build Date	Sep 26 2012 at 11:56:38
Boot Loader	BL 2.0.6.1
Copyright	©2008-2012 N-Tron Corporation
URL	http://www.n-tron.com

Copyright © 2008-2012
N-Tron Corporation
All rights reserved.
<http://www.n-tron.com>

Logged in as: **admin**

Web Management – Menu Structure

To the left, there is a menu which is shown fully opened below. The pages opened by each of the individual selections are described in the rest of this section. The use of each of these pages is also described in this section. In most of the descriptions, only the right side of the page is shown.

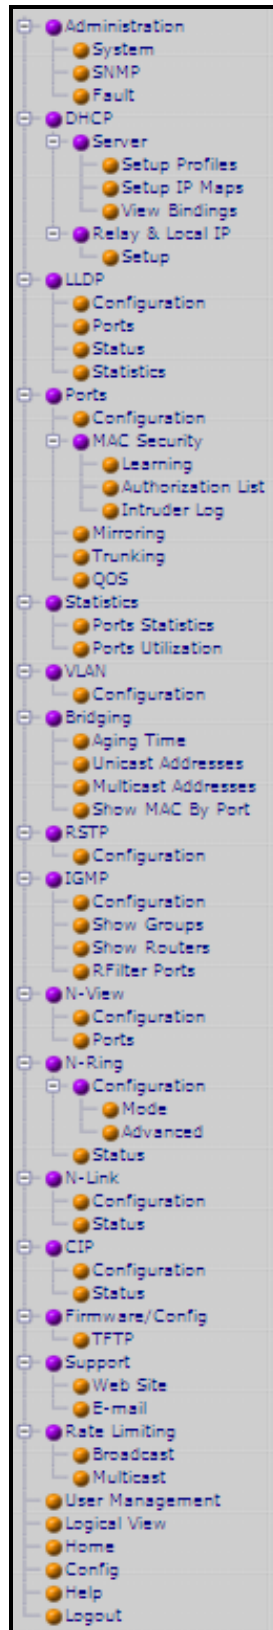

Administration – System

The System tab under the Administration category, lists various information about the switch:

When the IP Configuration is in either DHCP or Static Mode:

IP Configuration

Method used to obtain an IP Address, Subnet Mask and Gateway Address

IP Address

Contains the current IP Address of the device.

Subnet Mask

Contains the current Subnet Mask of the device.

Gateway

Contains the current Default Gateway of the device.

MAC Address

MAC Address of the device.

System Up Time

This parameter represents the total time count. This time has elapsed since the switch was turned ON or RESET.

Name

It shows the name of the product, which allows alphanumeric and special characters (#, _, -) only.

Contact

The person to contact for system issues, which should be someone within your organization.

Location

The physical location of the switch.

System Configuration View

IP Configuration	Static
IP Address	192.168.1.214
Subnet Mask	255.255.255.0
Gateway	192.168.1.1
MAC Address	00:07:af:7e:79:c0
System Up Time	0 days, 6 hours, 39 mins, 20 secs
Name	N-TRON Switch 7e:79:c0
Contact	N-TRON Admin
Location	Mobile, AL

ModifyRefresh

Administration – System, Continued...

By selecting the Modify button from the 'Static' mode, you will be able to change the switch's IP Configuration, IP Address, Subnet Mask, Gateway, Name, Contact information, and the Location of the switch through the web management features. It is recommended to change the TCP/IP information through the Command Line Interface (CLI) initially, but it defaults to the following:

IP Configuration - Static
IP Address – 192.168.1.201
Subnet Mask – 255.255.255.0
Gateway – 192.168.1.1

System Configuration

IP Configuration	Static
IP Address	192.168.2.214
Subnet Mask	255.255.255.0
Gateway	192.168.1.9
Name	N-TRON Switch fb:e4:00
Contact	N-TRON Admin
Location	Mobile, AL 36609

System Configuration

IP Configuration	Static
IP Address	Static DHCP 14
Subnet Mask	255.255.255.0
Gateway	192.168.1.9
Name	N-TRON Switch fb:e4:00
Contact	N-TRON Admin
Location	Mobile, AL 36609

Administration – System, Continued...

When the IP Configuration is in DHCP Mode the following information is added:

Client ID

Option used by DHCP clients to specify their unique identifier. The identifier may be the MAC address, switch name, or entered as a text string or hex characters.

Fallback IP Address

Contains the configured Fallback IP Address of the device.

Fallback Subnet Mask

Contains the configured Fallback Subnet Mask of the device.

Fallback Gateway

Contains the configured Fallback Gateway of the device.

System Configuration View

IP Configuration	DHCP
Client ID	00:07:affb:e4:00 Hex = 0007affbe400
IP Address	192.168.2.214
Subnet Mask	255.255.255.0
Gateway	192.168.1.9
Fallback IP Address	192.168.2.214
Fallback Subnet Mask	255.255.255.0
Fallback Gateway	192.168.1.9
MAC Address	00:07:affb:e4:00
System Up Time	0 days, 0 hours, 37 mins, 50 secs
Name	N-TRON Switch fb:e4:00
Contact	N-TRON Admin
Location	Mobile, AL 36609

Modify

Refresh

System Configuration

IP Configuration	DHCP ▾
Client ID	MAC Address ▾ MAC Address Switch Name Other String Other Hex
Fallback IP Address	
Fallback Subnet Mask	255.255.255.0
Fallback Gateway	192.168.1.9
Name	N-TRON Switch fb:e4:00
Contact	N-TRON Admin
Location	Mobile, AL 36609

Update

Cancel

If the IP Configuration mode is set to DHCP and the Fallback IP address is changed from the default IP address, then the switch will use the Fallback addresses if the IP configuration isn't received from a DHCP server in 2 minutes after initial boot. If Fallback address is used, DHCP Client will stop sending requests. If the IP Configuration is received from a DHCP server, it will never fallback, even if the lease is lost.

System Configuration

IP Configuration	DHCP ▾
Client ID	MAC Address ▾ 00:07:af:fb:e4:00
Fallback IP Address	192.168.2.214
Fallback Subnet Mask	255.255.255.0
Fallback Gateway	192.168.1.9
Name	N-TRON Switch fb:e4:00
Contact	N-TRON Admin
Location	Mobile, AL 36609

Update

Cancel

Administration – SNMP

The SNMP tab under the Administration category allows SNMP to be disabled or enabled, and shows a list of IP Addresses that act as SNMP Traps. The Read-Only, Read-Write, and Trap Community Names are also shown here.

Management Station Configuration View

SNMP Status	Enabled
Trap Version	1

IP Address - Trap Stn.#1	Value Not Configured
IP Address - Trap Stn.#2	Value Not Configured
IP Address - Trap Stn.#3	Value Not Configured
IP Address - Trap Stn.#4	Value Not Configured
IP Address - Trap Stn.#5	Value Not Configured
Read-Only Community Name	public
Read-Write Community Name	private
Trap Community Name	public

SNMP Notification Trap	Send Trap?
Power Supply	No
Cold Start	Yes
Authentication	Yes
Warm Start	Yes
Link Status	Yes

ModifyRefresh

By selecting the Modify button, you will be able to change any of the fields listed. This allows the user to set an IP address for a Trap station or change the Community Names. If the SNMP Notification Trap is enabled, systems that are listed as a Trap station will be sent the corresponding notification trap. To restore a Trap to “Value Not Configured”, enter ‘0.0.0.0’.

Administration – SNMP, Continued...

The trap version can be selected by pulldown as version 1 or 2. There are five SNMP traps that can be sent or not per the selection below.

Management Station Configuration

Snmp Status	Enabled ▾
Trap Version	1 ▾ 1 2
IP Address - Trap Stn.#1	Value Not Configured
IP Address - Trap Stn.#2	Value Not Configured
IP Address - Trap Stn.#3	Value Not Configured
IP Address - Trap Stn.#4	Value Not Configured
IP Address - Trap Stn.#5	Value Not Configured
Read-Only Community Name	public
Read-Write Community Name	private
Trap Community Name	public

SNMP Notification Trap	Send Trap?
Power Supply	☐
Cold Start	☒
Authentication	☒
Warm Start	☒
Link Status	☒

Administration – Fault

The Fault tab under the Administration category provides configurable selections indicating the way to notify when a Power or N-Link, or Port Usage, or N-Ring Signal fault occurs. The notification may consist of any combination of the options: Show web, Show LED, and Contact. Power faults consist of V_1 and V_2 . Port Usage faults are based on the settings of Usage Alarm Low [%] and Usage Alarm High [%] thresholds from the Ports Configuration Page. N-Ring signal faults consist of: Broken, Partial Break (Low), Partial Break (High), and Multiple Managers.

Fault Configuration View

Signal	Show Web	Show LED
Power V_1	No	No
Power V_2	No	No
N-Link Fault	Yes	Yes
Port Usage Fault	Yes	Yes

N-Ring Manager Signal	Show LED
Broken	Yes
Partial Break(Low)	Yes
Partial Break(High)	Yes
Multiple Managers	Yes

DHCP – Server – Setup Profiles

The Setup Profiles tab under the DHCP/Server category lists the following information about the current state of the server and the existing network profiles:

Server Enabled

Indicates whether the DHCP server is active.

Allow Broadcast

Indicates whether the DHCP server will process broadcast messages.

Delay Broadcast (Ms)

The amount of time the DHCP server will delay processing a broadcast message.

Server ID

Descriptive name of the DHCP server.

Profile Name

Descriptive name of the network profile.

Address Pool

Range of IP addresses which the profile can use.

Subnet Address

The most restrictive subnet address calculated from the address pool range.

Subnet Mask

The most restrictive subnet mask calculated from the address pool range.

Domain Name

The domain name to be presented to the client.

Has Profile IP Maps

Indicates whether the profile has IP maps associated with it.

Delete

Deletes the profile along with all IP maps and bindings associated with it. The Default profile cannot be deleted.

DHCP Server Setup

Server Enabled	Enabled
Allow Broadcast	Enabled
Delay Broadcast (Ms)	500
Server ID	N-TRON Switch fb:e4:00
Modify	

Network Profiles						
Profile Name	Address Pool	Subnet Address	Subnet Mask	Domain Name	Has Profile IP Maps	
DEFAULT				localdomain.com		
Add Profile						

DHCP – Server – Setup Profiles, Continued...

DHCP Server Configuration	
Server Enabled	Enabled ▾
Allow Broadcast	Enabled ▾
Delay Broadcast (Ms)	500
Server ID	N-Tron Switch fe:bd:e0
Update Cancel	

DHCP Server Network Profile	
Network Profile Name	
Address Pool Start	
Address Pool End	
Lease Time	28 Days 0 Hours
Advanced <<	
Broadcast Address *	
Domain Name *	
DNS Server 1 **	
DNS Server 2 **	
Gateway 1 **	
Gateway 2 **	
* When field is left blank, the corresponding default profile value is used. ** When both related fields are left blank, the corresponding default profile values are used. Update Cancel	

DHCP – Server – Setup IP Maps

The Setup IP Maps tab provides the way to create IP mappings with an existing network profile. There are three types of mappings that can be created: Dynamic Range, Static Range, and Single IP.

Before a non-default Network profile has been configured:

DHCP Server Setup IP Maps

Network Profile	Binding Identifier	IP Map
☐ Show Hex		
You must add a non Default Network Profile before adding an IP Map.		

Refresh

After a non-default Network profile has been configured:

DHCP Server Setup IP Maps

Network Profile	Binding Identifier	IP Map
☐ Show Hex		
You must add a non Default Network Profile before adding an IP Map.		

Select Mapping

Dynamic Range	IP Address Range
Static Range	Option 82 Relay Agent
Single IP	Option 61 or MAC

Refresh

DHCP – Server – Setup IP Maps, Continued...

The Dynamic Range type of mapping is used to create a range of dynamic IP addresses for requesting clients. The following information is required:

Network Profile

An existing network profile to which the IP map applies.

Low IP

The starting IP address of a range.

High IP

The ending IP address of a range.

DHCP Server Dynamic Range

Network Profile	prof_1 ▾
Low IP	
High IP	

DHCP – Server – Setup IP Maps, Continued...

The Static Range type of mapping is used to create a range of static IP addresses dedicated to specific ports on a relay agent switch. There are two different data entry formats available according to whether the relay agent type is for an N-TRON or for a generic switch.

To create a range of static IP addresses on an N-Tron relay agent switch:

Network Profile

An existing network profile to which the IP map applies.

Relay Agent Type

Should be set to N-TRON.

Switch Model

List of N-TRON models that support this feature.

Remote ID

A unique identifier that designates the N-TRON relay agent switch.

Add

Checkbox used to add an IP map for the corresponding port.

Port No

The actual port number.

Port Name

Descriptive name of the port.

VLAN

VLAN ID that the port is a member of.

Circuit ID

Auto-generated string based on the port name and VLAN ID.

IP Address

IP address to assign to the IP map.

DHCP – Server – Setup IP Maps, Continued...

DHCP Server Static Range

(Option 82)

Network Profile	test_profile ▾
Relay Agent Type	☒ N-TRON ☐ Generic
Switch Model	708M12 ▾
Remote ID	☐ Hex ☐ MAC ☒ IP ☐ String

Add	Port No	Port Name	VLAN	Circuit ID	IP Address
☐	1	TX1	1	TX1-0001	192.168.2.
☐	2	TX2	1	TX2-0001	192.168.2.
☐	3	TX3	1	TX3-0001	192.168.2.
☐	4	TX4	1	TX4-0001	192.168.2.
☐	5	TX5	1	TX5-0001	192.168.2.
☐	6	TX6	1	TX6-0001	192.168.2.
☐	7	TX7	1	TX7-0001	192.168.2.
☐	8	TX8	1	TX8-0001	192.168.2.

Update

Cancel

DHCP – Server – Setup IP Maps, Continued...

To create a range of static IP addresses on a generic relay agent switch:

Network Profile

An existing network profile to which the IP map applies.

Relay Agent Type

Should be set to Generic.

Port Count

The number of ports on the particular relay agent switch.

Add

Checkbox used to add an IP map for the corresponding port.

Port No

The actual port number.

Remote ID

The identifier that corresponds to an Option 82 Remote ID sub-option used by the particular relay agent switch.

Circuit ID

The identifier that corresponds to an Option 82 Circuit ID sub-option used by the particular relay agent switch.

IP Address

IP address to assign to the IP map.

DHCP Server Static Range

(Option 82)

Network Profile	prof_1		
Relay Agent Type	☐ N-TRON ☒ Generic		
Port Count	8	Apply	

Add	Port No	Remote ID	Circuit ID	IP Address
☐	1	 ☒ Hex ☐ MAC ☐ IP ☐ String	 ☒ Hex ☐ MAC ☐ IP ☐ String	192.168.2.
☐	2	 ☒ Hex ☐ MAC ☐ IP ☐ String	 ☒ Hex ☐ MAC ☐ IP ☐ String	192.168.2.
☐	3	 ☒ Hex ☐ MAC ☐ IP ☐ String	 ☒ Hex ☐ MAC ☐ IP ☐ String	192.168.2.
☐	4	 ☒ Hex ☐ MAC ☐ IP ☐ String	 ☒ Hex ☐ MAC ☐ IP ☐ String	192.168.2.
☐	5	 ☒ Hex ☐ MAC ☐ IP ☐ String	 ☒ Hex ☐ MAC ☐ IP ☐ String	192.168.2.
☐	6	 ☒ Hex ☐ MAC ☐ IP ☐ String	 ☒ Hex ☐ MAC ☐ IP ☐ String	192.168.2.
☐	7	 ☒ Hex ☐ MAC ☐ IP ☐ String	 ☒ Hex ☐ MAC ☐ IP ☐ String	192.168.2.
☐	8	 ☒ Hex ☐ MAC ☐ IP ☐ String	 ☒ Hex ☐ MAC ☐ IP ☐ String	192.168.2.

DHCP – Server – Setup IP Maps, Continued...

The Single IP type of mapping is used to create a static IP address for an individual client. The following information is required:

Network Profile

An existing network profile to which the IP map applies.

IP

The static IP address to offer to a client.

Unique ID

The unique identifier that must match either the client identifier (Option 61) or the client's hardware address (MAC).

Format

Designates how the Unique ID is interpreted.

DHCP Server Static IP

(Option 61/MAC)

Network Profile	prof_1 ▾		
IP			
Unique ID (i.e. - MAC)		Format	MAC Address ▾
			Hex Values
			MAC Address
			String

DHCP – Server – View Bindings

The View Bindings tab lists the bindings of physical devices to IP addresses that are in use or offered:

Network Profile

The profile applied to the binding entry.

Binding Identifier

The client associated with the binding entry.

Client Hardware Address (MAC)

The client's MAC address.

Client IP Address

The actual IP address assigned to the binding entry.

Status

Indicates the current status of the binding entry.

Release

Removes the corresponding binding.

WARNING: By releasing an IP address, it is possible to end up with two physical devices with the same IP address which may cause network disruption to that IP address.

DHCP Server Binding List					
Network Profile	Binding Identifier ☐ Show Hex	Client Hardware Address (MAC)	Client IP Address	Status	
prof_1	Client ID (String) = N-Tron Switch fb:fa:40	00:07:af:fb:fa:40	192.168.2.100	Dynamic, In Use	<button>Release</button>
<button>Refresh</button>					

DHCP – Relay & Local IP - Setup

The Setup tab under the DHCP/Relay & Local IP category shows the current state of the relay agent.

DHCP Relay Agent & Local IP Setup View

Relay Status	Disabled
Remote ID	192.168.2.232
Server 1 IP	
Server 2 IP	
Server 3 IP	
Server 4 IP	

Port No	Port Name	Relay Status
01	TX1	Disabled
02	TX2	Disabled
03	TX3	Disabled
04	TX4	Disabled
05	TX5	Disabled
06	TX6	Disabled
07	TX7	Disabled
08	TX8	Disabled

ModifyRefresh

By selecting the Modify button, you can configure general settings of the relay agent, as well as, configure settings on a per port basis. The following describes these settings:

Relay Status

Indicates whether the DHCP relay agent is active.

Remote ID

The unique identifier that designates the relay agent switch.

Server # IP

The configured IP address of the DHCP servers.

Port No

The actual port number.

Port Name

The descriptive name of the port.

Relay Status

The selection to designate whether the port will perform relay agent functionality. The choices are:

Disabled

The port will function without relay agent processing.

Enabled

The port will relay DHCP client-originated broadcast packets to the DHCP servers.

Assign Local IP

The port will not relay DHCP client-originated broadcast packets. Instead the relay agent will offer the port's locally assigned IP address to the client.

DHCP – Relay & Local IP – Setup, Continued...

Other Data

When the Relay Status is set to Enabled, the Circuit ID for the port can be specified. When the Relay Status is set to Assign Local IP, the IP address for the port can be specified.

DHCP Relay Agent & Local IP Setup

Relay Status	Disabled ▼
Remote ID	IP Address ▼ 192.168.2.232
Server 1 IP	
Server 2 IP	
Server 3 IP	
Server 4 IP	

Port No	Port Name	Relay Status	Other Data	
01	TX1	Disabled ▼		
02	TX2	Disabled ▼		
03	TX3	Disabled ▼		
04	TX4	Disabled ▼		
05	TX5	Disabled ▼		
06	TX6	Disabled ▼		
07	TX7	Disabled ▼		
08	TX8	Disabled ▼		

LLDP - Configuration

Mode:

Enables or Disables LLDP on the Switch. Default: Disabled

Transmit Interval:

Specifies the interval at which LLDP frames are transmitted. Default = 30 seconds.

Transmit Hold Multiplier:

Specifies a multiplier on the Transmit Interval when calculating a Time-to-Live value. Default = 4.

Re-Initialization Delay:

Specifies a minimum time an LLDP port will wait before re-initializing after setting the port to disable followed by setting a port to Tx-Only or Tx/Rx. This prevents excessive Notifications if someone toggles between Disabled and Enabled on LLDP Port settings. Default = 2 Seconds.

Notification Interval

Specifies the interval between successive Notifications generated by the switch. If a port sends out a notification and another port tries to send out a notification, the notification will not be sent until the interval expires. Default = 5 Seconds.

LLDP Configuration View

Mode	Disabled
Transmit Interval (Sec)	30
Transmit Hold Multiplier	4
Re-Initialization Delay (Sec)	2
Notification Interval (Sec)	5

Note: *A redundant network topology will have one or more blocking ports to prevent looping and broadcast storms. LLDP will not receive neighbor information into a blocked port, though the LLDP information will be transmitted out of a blocked port. Therefore, the switch that has the blocked port will not know about the neighbor on the other side of the blocked port, but the neighbor will know about the switch that has the blocked port.*

LLDP - Ports

LLDP Ports View

Port Name

Descriptive name of the port on the local switch.

Transmit

Enables or Disables LLDP Transmission on the switch.

Receive

Enables or Disables Receiving of LLDP Frames from neighbor switches.

Allow Management Data

Allow the Transmission of Management type information. For example: IP Address of switch, Port Description, System Name and Vlan information.

Allow Notifications

Notifications are transmitted when local or remote data changes.

LLDP Ports View				
Port Name	Transmit	Receive	Allow Management Data	Allow Notification
TX1	YES	YES	YES	NO
TX2	YES	YES	YES	NO
TX3	YES	YES	YES	NO
TX4	YES	YES	YES	NO
TX5	YES	YES	YES	NO
TX6	YES	YES	YES	NO
TX7	YES	YES	YES	NO
TX8	YES	YES	YES	NO
Modify Refresh				

LLDP - Status

LLDP Ports Neighbor View

The Status View shows the results of LLDP discovery. The LLDP Ethernet frames received from neighboring ports are composed of a collection of data units called TLVs. Each TLV contains a defined type of information such as the Chassis ID described below, which contains the MAC address of the device sending the frame. The maximum number of neighbors displayed per port is four.

Port Name

The name of the local port on which the neighbor information was received.

Neighbor MAC

MAC address of neighbor switch. Corresponds to the LLDP Chassis ID TLV.

Neighbor IP

IP address of neighbor switch. Corresponds to the LLDP Management Address TLV.

Neighbor Port Description

Description of the neighbor Port from which the LLDP frame was sent.

Neighbor System Name

The system's administratively assigned name on the neighbor switch.

Neighbor VLAN PVID

The Port VLAN identifier (PVID) associated with the neighbor port.

Neighbor VLAN ID/Name

A list of all VLAN's for which the neighbor port is a member.

Neighbor TTL

Indicates the number of seconds that the information associated with this neighbor will be valid. Time to Live (TTL)

LLDP Ports Neighbor View

Port Name	Neighbor MAC	Neighbor IP	Neighbor Port Description	Neighbor System Name	Neighbor Vlan PVID	Neighbor Vlan ID/Name	Neighbor TTL
TX2	00:07:affc:02:47	192.168.1.91	Port 7 - 10/100 Mbit TX	N-Tron Switch fc:02:40	1	0001 - Default VLAN	117
TX2	00:07:affb:dc:63	192.168.2.23	Port 3 - 10/100 Mbit TX	N-Tron Switch fb:dc:60	1	0001 - Default VLAN	117
TX4	00:07:affc:c8:c4	192.168.1.87	Port 4 - 10/100 Mbit TX	N-Tron Switch ff:c8:c0	1	0001 - Default VLAN	114
TX7	00:07:affc:05:07	192.168.2.27	Port 7 - 10/100 Mbit TX	N-Tron Switch fc:05:00	1	0001 - Default VLAN 3333 - N-Ring VLAN	96
TX8	00:07:aff8:d:e8	192.168.2.24	Port 8 - 10/100 Mbit TX	N-Tron Switch ff:8d:e0	1	0001 - Default VLAN 3333 - N-Ring VLAN	89

Refresh

LLDP - Statistics

LLDP Local Port Statistics View

Port Name

Descriptive name of the port on the local switch.

Transmitted Frames

The total number of LLDP Frames sent out from the local switch.

Received Frames

Total number of LLDP frames received by the local switch.

Discarded Frames

The total number of frames discarded due to incorrect TLV's in frame.

Error Frames

Total count of all LLDP frames received with one or more detectable errors.

Neighbor Age Outs

Total count of the times that a neighbor's information has been deleted from the switch because the Time to Live (TTL) has expired.

LLDP Port Status

Local Port setting (Receive-Rx/Transmit-Tx/Disable).

LLDP Local Port Statistics View						
Port Name	Transmitted Frames	Received Frames	Discarded Frames	Error Frames	Neighbor Age Outs	LLDP Port Status
TX1	0	0	0	0	0	RxTx
TX2	22	29	0	0	1	RxTx
TX3	0	0	0	0	0	RxTx
TX4	22	23	0	0	0	RxTx
TX5	0	0	0	0	0	RxTx
TX6	0	0	0	0	0	RxTx
TX7	22	46	0	0	0	RxTx
TX8	22	46	0	0	0	RxTx

Refresh

Ports – Configuration

The Configuration tab under the Ports category will show a detailed overview of all the active ports on the switch. The overview will display the following information:

Port Number

This is the port index.

Port Name

This field displays the name of the port. The designation of TX is for copper ports.

Admin Status

This configurable field displays the existing status of the port whether it is **Enabled/Disabled**.

Link Status

Current Link state of the port.

Auto Negotiation State

This configurable field displays the current auto-negotiation state whether it is **Enabled/Disable**.

Port Speed

This configurable field displays the speed of each port **10/100/1000** Mbps.

Duplex Mode

This configurable field displays the existing mode of the port whether it is **Full Duplex/Half Duplex**.

Crossover Mode

This configurable field displays the existing crossover mode of the port. This can be Yes, No, or Auto. Auto is the default.

Flow Control State

This configurable field displays the existing flow control status of each port. When enabled, the individual port supports half-duplex back pressure and full-duplex flow control. The default is **Disabled**.

Port State

The current RSTP status of a port. It may contain **Disable/Discarding/Learning/Forwarding**.

PVID

This configurable field displays the existing port VLAN ID setting. The allowable range is **1-4094**.

Usage Alarm Low (%)

The bandwidth utilization percentage below which a fault will be triggered if enabled. For half duplex the bandwidth utilization percentage is the sum of both RX and TX bandwidth utilization, and for full duplex this is the higher of TX or RX bandwidth utilization. See Port Utilization View and Port Usage Fault on Fault Configuration View.

Usage Alarm High (%)

The bandwidth utilization percentage above which a fault will be triggered if enabled. For half duplex the bandwidth utilization percentage is the sum of both RX and TX bandwidth utilization, and for full duplex this is the higher of TX or RX bandwidth utilization. See Port Utilization View and Port Usage Fault on Fault Configuration View.

Port Configuration View												
Port No	Port Name	Admin Status	Link Status	Auto Nego	Port Speed	Duplex Mode	Cross Over	Flow Control	Port State	PVID	Usage Alarm Low [%]	Usage Alarm High [%]
01	TX1	Enabled	Down	Enabled	Auto	Auto	Auto	Disabled	Disabled	1	0	100
02	TX2	Enabled	Down	Enabled	Auto	Auto	Auto	Disabled	Disabled	1	0	100
03	TX3	Enabled	Down	Enabled	Auto	Auto	Auto	Disabled	Disabled	1	0	100
04	TX4	Enabled	Down	Enabled	Auto	Auto	Auto	Disabled	Disabled	1	0	100
05	TX5	Enabled	Down	Enabled	Auto	Auto	Auto	Disabled	Disabled	1	0	100
06	TX6	Enabled	Down	Enabled	Auto	Auto	Auto	Disabled	Disabled	1	0	100
07	TX7	Enabled	Up	Enabled	100	Full	Auto	Disabled	Forwarding	1	0	100
08	TX8	Enabled	Down	Enabled	Auto	Auto	Auto	Disabled	Disabled	1	0	100
09	TX9	Enabled	Down	Enabled	Auto	Auto	Auto	Disabled	Disabled	1	0	100
10	TX10	Enabled	Down	Enabled	Auto	Auto	Auto	Disabled	Disabled	1	0	100
11	TX11	Enabled	Down	Enabled	Auto	Auto	Auto	Disabled	Disabled	1	0	100
12	TX12	Enabled	Down	Enabled	Auto	Auto	Auto	Disabled	Disabled	1	0	100
13	TX13	Enabled	Down	Enabled	Auto	Auto	Auto	Disabled	Disabled	1	0	100
14	TX14	Enabled	Down	Enabled	Auto	Auto	Auto	Disabled	Disabled	1	0	100
15	TX15	Enabled	Down	Enabled	Auto	Auto	Auto	Disabled	Disabled	1	0	100
16	TX16	Enabled	Down	Enabled	Auto	Auto	Auto	Disabled	Disabled	1	0	100

Refresh

Ports – Configuration, Continued...

The User can click on the Port Number to configure each port individually. This will allow the user to change the port's settings for the following fields which are explained above:


Admin Status
Speed and Duplex
Flow Control
Cross Over
PVID
Usage Alarm Low
Usage Alarm High

TX2 - Port Configuration

Port Name	TX2
Admin Status	Enabled ▾
Speed And Duplex	10/Full ▾
Cross Over	Auto ▾
Flow Control	Disabled ▾
PVID	1
Usage Alarm Low [%]	0
Usage Alarm High [%]	100

Ports – MAC Security – Learning

MAC Security is reached from the left hand navigation under 'Ports':

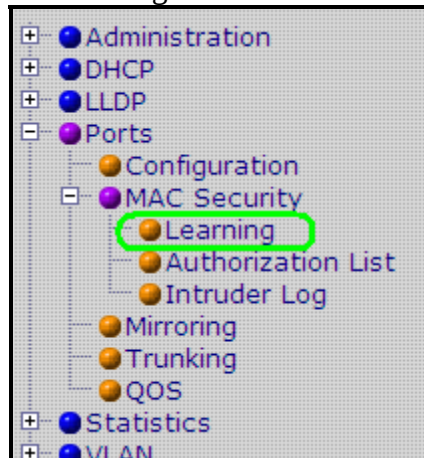

The Learning tab allows the administrator to control the learning or locking modes for the ports. 'Locked' is the secure mode. 'Learning' builds an internal list of authorized MAC addresses based on an approved LAN. When the current mode is 'Learning', no ports are secured.

MAC Learning View

Current Mode Learning

Port No	Port Name	Secure	Role
01	TX1	☐	
02	TX2	☐	
03	TX3	☐	
04	TX4	☐	
05	TX5	☐	
06	TX6	☐	
07	TX7	☐	
08	TX8	☐	

Modify Refresh

Ports – MAC Security – Learning, Continued...

In 'Locked' mode, the selected ports under "Secure Ports" are secured. *Note: when N-Ring and/or N-Link are used, the N-Ring/N-Link ports will not have MAC Security enabled.*

MAC Learning View

Current Mode Locked

Secure Ports			
Port No	Port Name	Secure	Role
01	TX1	☒	
02	TX2	☒	
03	TX3	☐	
04	TX4	☐	
05	TX5	☒	
06	TX6	☐	
07	TX7	☒	
08	TX8	☒	

Modify Refresh

Ports – MAC Security – Learning, Continued...

The Modify button allows the administrator to change the current mode and/or to change the ports selected for MAC Security. When transitioning from 'Learning' to 'Locked', the Address Resolution Logic (ARL) table represents the authorized MAC addresses, with the addition of any manually entered addresses (refer to Authorization List section below). Transitioning from 'Locked' to 'Learning' clears the ARL for all ports.

MAC Learning Configuration

Current Mode

Learning ▼
Learning
Locked

Secure Ports


Port No	Port Name	Secure	Role
01	TX1	☐	
02	TX2	☐	
03	TX3	☐	
04	TX4	☐	
05	TX5	☐	
06	TX6	☐	
07	TX7	☐	
08	TX8	☐	

Update

Cancel

Ports – MAC Security – Authorization List

The Authorization List tab allows for manual entry or deletion of authorized MAC source addresses with associated authorized ports.

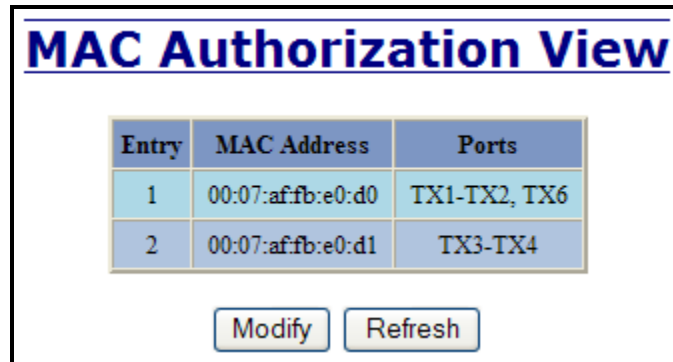


MAC Authorization View

Entry	MAC Address	Ports
1	00:07:af:fb:e0:d0	TX1-TX2, TX6
2	00:07:af:fb:e0:d1	TX3-TX4

Modify Refresh

Selecting Modify displays the MAC Authorization Configuration page, which allows the administrator to add new entries, delete existing entries, or edit authorized ports of existing entries.

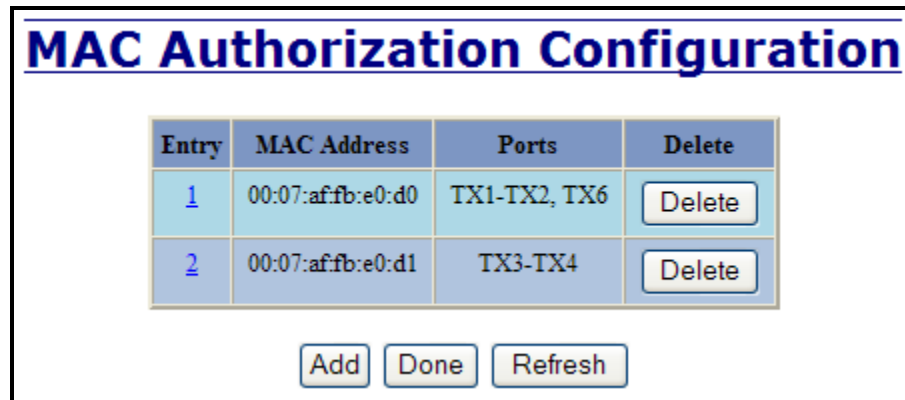


MAC Authorization Configuration

Entry	MAC Address	Ports	Delete
1	00:07:af:fb:e0:d0	TX1-TX2, TX6	Delete
2	00:07:af:fb:e0:d1	TX3-TX4	Delete

Add Done Refresh

Selecting Delete removes the associated entry. Selecting Add displays the MAC Authorization Entry page, showing default values for the administrator to modify (see below). When an entry number hyperlink is selected, this same page is displayed except it shows the associated MAC address and authorized ports.

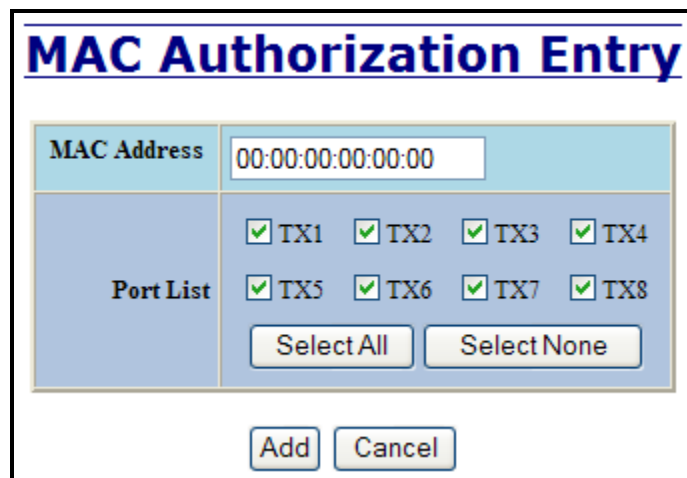

MAC Authorization Entry

MAC Address	00:00:00:00:00:00
Port List	☒ TX1 ☒ TX2 ☒ TX3 ☒ TX4
	☒ TX5 ☒ TX6 ☒ TX7 ☒ TX8
Select All Select None	

Add Cancel

Ports – MAC Security – Intruder Log

The Intruder Log tab displays a list of unauthorized MAC addresses that attempted to access the secured device. Each intruder entry in the log is unique, and is based on the combination of MAC address, VLAN, and port. Only the first occurrence of the intruder is listed. The log is ordered by most recent first, based on the system time. The maximum number of entries is 100. If more than 100 intruders are detected, the oldest entries are deleted. The log is not saved through a power cycle.

Intruder Log					
Entry	Mac Address	VLAN	Port	System Time	
1	00:00:00:00:03:01	7	TX7	0 days, 0 hours, 0 mins, 7 secs	Delete
2	00:00:00:00:02:01	8	TX8	0 days, 0 hours, 0 mins, 7 secs	Delete
3	00:00:00:00:01:01	1	TX1	0 days, 0 hours, 0 mins, 7 secs	Delete

Clear

ALL

ALL

TX1

TX2

TX3

TX4

TX5

TX6

TX7

TX8

Refresh

An entry can be individually removed from the log by selecting the associated Delete button. All entries or entries specific to a port can also be removed from the log by choosing the option in the dropdown list and then selecting the Clear button.

Ports – Mirroring

A mirroring port is a dedicated port that is configured to receive the copies of Ethernet frames that are being transmitted out and also being received in from any other port that is being monitored.

The Mirroring tab under the Ports category displays the status including the list of Source Ports and the Destination Port that the Sources are being mirrored to.

‘Mirrored Data Only’ can be selected and this selects for mirrored data only to be transmitted to the destination port, as opposed to mirrored data and whatever other data is otherwise destined for the destination Port.

Port Mirroring Configuration View

Mirror Status	Disabled
Destination Port	TX1
Mirrored Data Only	☐

Source Ports

Port No	Port Name	Tx	Rx
01	TX1	☐	☐
02	TX2	☐	☐
03	TX3	☐	☐
04	TX4	☐	☐
05	TX5	☐	☐
06	TX6	☐	☐
07	TX7	☐	☐
08	TX8	☐	☐

Modify

Refresh

Ports – Mirroring, Continued...

Following the Modify button, you can enable the status of port mirroring and select source ports and the destination port that the source ports will be mirrored to.

Port Mirroring Configuration

Mirror Status	Disabled
Destination Port	TX1
Mirrored Data Only	

Source Ports

Port No	Port Name		
	ALL	☐	☐
01	TX1	☐	☐
02	TX2	☐	☐
03	TX3	☐	☐
04	TX4	☐	☐
05	TX5	☐	☐
06	TX6	☐	☐
07	TX7	☐	☐
08	TX8	☐	☐

Ports – Trunking

The Trunking tab under the Ports category displays the following details:

Trunk Ports

This field displays the ports associated with the trunk.

Trunk Status

This configurable field displays the existing status of the trunk. It can be either Enabled/Disabled.

Port Trunking Configuration View

Trunk Ports	Trunk Status
TX7, TX8	Disabled

By selecting the Modify button, you can select a trunk group.

Port Trunking Configuration

Trunk Ports	Trunk Status
TX7, TX8 ▼	Disabled ▼

Note: *RSTP must be disabled in order to use the Trunking feature.*

Two ports of the same speed can constitute a valid trunk.

Only 1 Trunk per switch can be created.

All trunk ports must be at the same speed and duplex mode. If a port is not linked, there could be difficulty as to similar speed and duplex mode. It is best to hard code speed and duplex mode for each trunking link, at both ends.

Do not use Trunking on an N-Ring manager. Do not connect the N-Ring to actively Trunking ports on an Auto Member.

Ports – QOS

The QOS decision tree chooses the highest priority Transmit Queue (TQ) of the following criteria: Force High Priority (Port Based) TQ mapping, IEEE 802.1p TQ mapping, or DSCP TQ mapping.

The QOS tab under the Ports category displays the following details:

Port Number

This is the port index.

Port Name

This field displays the name of the port.

Include DSCP

This field displays the status of whether or not to include the RFC 2474 DSCP TOS (Type of Service) in the TQ decision. When enabled, the DSCP TOS is included when evaluating traffic priority.

Include 802.1p

This field displays the status of whether or not to include the IEEE 802.1p COS (Class of Service) in the TQ decision. When enabled, the IEEE 802.1p COS is included when evaluating traffic priority.

Force High Priority

This field displays the Force High Priority status. When enabled, the port based priority is included in the TQ decision for all ports and all frames received on a port will use the default QOS priority for that port in the TQ decision.

Port Priority

This field displays the default QOS priority for that port. This is the IEEE 802.1p COS (Class of Service) assigned to all untagged ingress frames, or all ingress frames if Force High Priority is enabled. The range is 0-7.

QOS Configuration View

Port No	Port Name	Include DSCP	Include 802.1p	Force High Priority	Port Priority
1	TX1	Enabled	Enabled	Disabled	1
2	TX2	Enabled	Enabled	Disabled	1
3	TX3	Enabled	Enabled	Disabled	1
4	TX4	Enabled	Enabled	Disabled	1
5	TX5	Enabled	Enabled	Disabled	1
6	TX6	Enabled	Enabled	Disabled	1
7	TX7	Enabled	Enabled	Disabled	1
8	TX8	Enabled	Enabled	Disabled	1

Modify

Refresh

Ports – QOS, Continued...

Following the Modify button, the administrator can independently configure the ports for different QOS functionality. Once these fields are filled in to meet the needs of the administrator's network, the changes may be updated by clicking the Update button at the bottom of the page.

Modify QOS Configuration

Port No	Port Name	Include DSCP	Include 802.1p	Force High Priority	Port Priority
1	TX1	Enabled	Enabled	Disabled	1
2	TX2	Enabled	Enabled	Disabled	1
3	TX3	Enabled	Enabled	Disabled	1
4	TX4	Enabled	Enabled	Disabled	1
5	TX5	Enabled	Enabled	Disabled	1
6	TX6	Enabled	Enabled	Disabled	1
7	TX7	Enabled	Enabled	Disabled	1
8	TX8	Enabled	Enabled	Disabled	1

Update

Cancel

0
1
2
3
4
5
6
7


Statistics – Port Statistics

The Ports Statistics tab under the Statistics category displays a list of MIB parameters. Each port has a separate counter for each parameter. This gives users the ability to see what kind of packets are going over which ports. At the bottom of the page for each port there are two buttons. Refresh will update the statistics for that port number and Clear will reset all the counters for that port number.


Port Statistics		
Port TX8		
Statistics At Port No: TX8		
S.No	Counter Type	Value
1	Tx Octets	2014509
2	Tx Dropped Packets	0
3	Tx Broadcast Packets	4
4	Tx Multicast Packets	9591
5	Tx Unicast Packets	524
6	Tx Collisions	0
7	Tx Single Collision	0
8	Tx Multiple Collision	0
9	Tx Deferred Transmit	0
10	Tx Late Collision	0
11	Tx Excessive Collision	0
12	Tx Frame In Disc	0
13	Tx Pause Packets	0
14	Rx 64 Packets	501
15	Rx 65 to 127 Packets	55
16	Rx 128 to 255 Packets	6
17	Rx 256 to 511 Packets	22
18	Rx 512 to 1023 Packets	67
19	Rx 1024 to 1522 Packets	0
20	Rx Octets	86796
21	Rx Dropped Packets	0
22	Rx Broadcast Packets	48
23	Rx Multicast Packets	132
24	Rx Unicast Packets	471
25	Rx Undersize Packets	0
26	Rx Oversize Packets	0
27	Rx Jabbers	0
28	Rx Alignment Errors	0
29	Rx Good Octets	86796
30	Rx SA Changes	38
31	Rx FCS Errors	0
32	Rx Pause Packets	0
33	Rx Fragments	0
34	Rx Excessive Disc Size	0
35	Rx Symbol Error	0
Refresh Clear		

Statistics – Port Utilization

The Ports Utilization tab under the Statistics category shows all the ports on the switch and will display a bar graph showing the percentage of bandwidth being used. These figures and bars are for a general feeling of what the bandwidth usage is. N-Tron recommends the use of N-View in order to get a precise bandwidth usage figure.

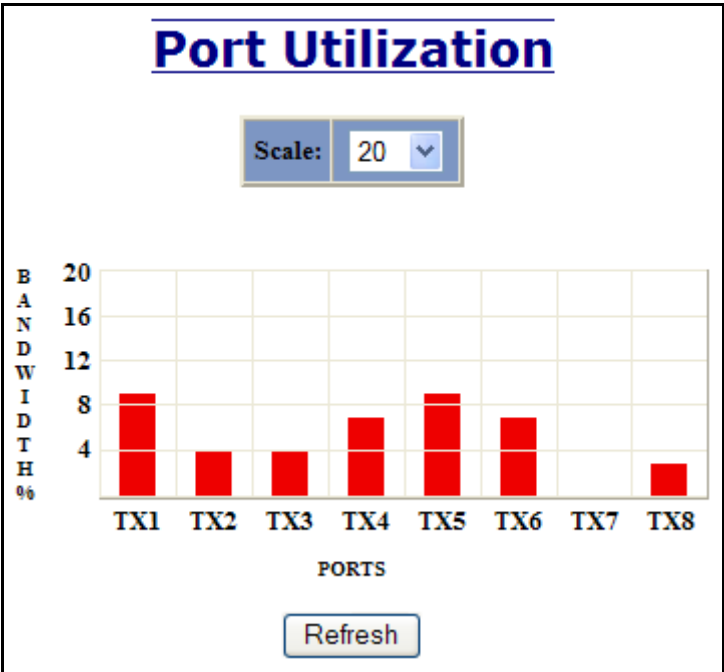

The scale can be adjusted for the task at hand:

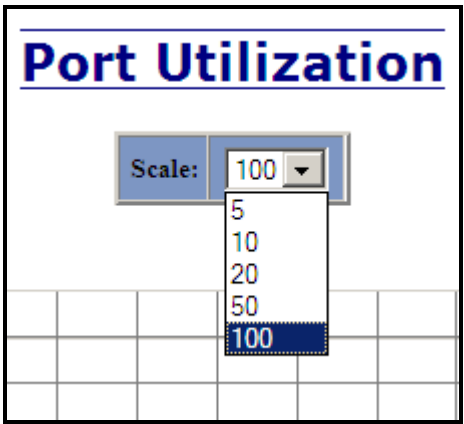

VLAN – Configuration

Replace VID Tag with Default Port VID

Specifies whether or not to replace the incoming VID tag with the port's designated VID.

Perform Ingress Filtering

Specifies whether or not to filter out ingress frames when a VID violation is detected.

Discard Non-Tagged for Ports

Specifies whether or not non-tagged ingress frames are dropped by the selected ports.

Remove Ports from Default VLAN when Added to Other VLAN

Specifies whether or not to remove ports from Default VLAN when they are added to another VLAN.

VLAN Configuration

Replace VID Tag With Default Port VID	☐
Perform Ingress Filtering	☐
Discard Non-Tagged For Ports	☐ TX1 ☐ TX2 ☐ TX3 ☐ TX4
	☐ TX5 ☐ TX6 ☐ TX7 ☐ TX8
	☐ TX9 ☐ TX10 ☐ TX11 ☐ TX12
	☐ TX13 ☐ TX14 ☐ TX15 ☐ TX16
Select All Select None	
Remove Ports From Default VLAN When Added To Other VLANs	☒
Update Cancel	

VLAN Groups					
VLAN ID	VLAN Name	Group Members	Untag On Egress	Allow Mgmt	Delete
0001	Default VLAN	TX3-TX16	TX3-TX16	☒	
3333	N-Ring VLAN	TX1-TX2	(None)	☒	Delete
Add					

Note that for convenience in most frequent use:

- Ports are deleted from group1 as each port is added to another group.
- Ports are added to group1 if a deletion leaves a port with no group.
- If it is desired to have a port on group1 and also on other group(s) configure group1 last to achieve that.

Note: *RSTP on overlapping VLANs is not supported and the system will automatically disable RSTP on all but the lowest VID VLANs that have overlapping ports.*

VLAN Configuration View

Replace VID With Default Port VID	☐
Perform Ingress Filtering	☐
Discard Non-Tagged For Ports	(None)
Remove Ports From Default VLAN When Added To Other VLANs	☒

VLAN ID	VLAN Name	Group Members	Untag On Egress	Allow Mgmt
0001	Default VLAN	TX3-TX16	TX3-TX16	☒
3333	N-Ring VLAN	TX1-TX2	(None)	☒

Modify

Refresh

VLAN – Group Configuration

VLAN ID

This field displays the VLAN ID. The range should be **1-4094**.

VLAN Name

This configurable field displays the name of the VLAN, which accepts alphanumeric and special characters (#, _, -, .) only.

Allow Management

Specifies whether or not all ports in this VLAN are management ports.

Change PVID of Member Ports

Specifies whether or not the PVID of the member ports is set to this VLAN ID.

Port No

This is the port index.

Port Name

Descriptive name of the port

Group Member

Specifies whether or not the port is included in the group.

Untag on Egress

Specifies whether or not egress frames are tagged by the designated port.

Tagged VLAN Group Configuration

ID	
Name	
Allow Management	☐
Change PVID Of Member Ports	☒

Group Ports

Port No	Port Name	Group Member	Untag On Egress
01	TX1	☐	☐
02	TX2	☐	☐
03	TX3	☐	☐
04	TX4	☐	☐
05	TX5	☐	☐
06	TX6	☐	☐
07	TX7	☐	☐
08	TX8	☐	☐

Update

Cancel


Bridging – Aging Time

The Aging Time tab under the Bridging category will display the currently configured Aging Time. This page allows users to modify this variable to meet their needs.



A screenshot of a web interface titled "Bridging Aging Time View". The title is in a large, bold, blue font. Below the title, there is a light blue box containing the text "Aging Time" followed by "20 secs". Below this box, there are two buttons: "Modify" and "Refresh", both in a light blue box.

After selecting the Modify button, the user will be presented with a page that allows the number to be entered and updated. The default aging time is 20 seconds.

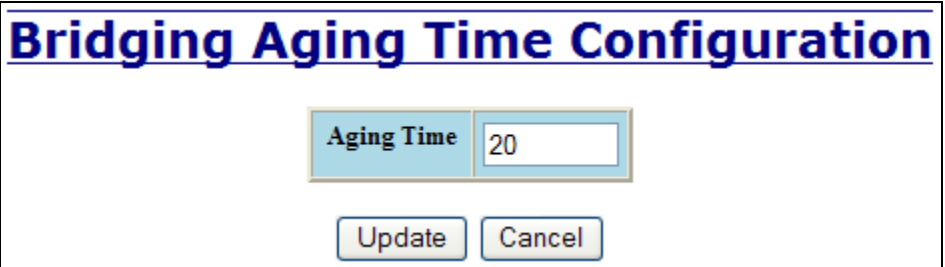

A screenshot of a web interface titled "Bridging Aging Time Configuration". The title is in a large, bold, blue font. Below the title, there is a light blue box containing the text "Aging Time" followed by a text input field containing the number "20". Below this box, there are two buttons: "Update" and "Cancel", both in a light blue box.

Note: *If the switch is an active participant of an N-Ring, then the N-Ring Aging Time will be used instead of the Bridging Aging Time.*

Bridging – Unicast Addresses

The Unicast Addresses tab under the Bridging category will display a list of MAC addresses that are associated with each respective port number. This can be used to statically assign a MAC address access to a single port on the switch.

Display Static Unicast MAC Addresses

Static Unicast MAC Address Filters		
MAC Address	Port	VLAN ID

Number of Static Unicast MAC Addresses: 0

Following the Add button on the page above, the administrator must enter a valid MAC address and associate it with a port number on the switch. Once the administrator hits the Add button, the changes will take effect instantly.

Add Unicast MAC Address Filter

Mac Address	00:07:AF:00:00:00
Port	TX1
VLAN ID	1

Bridging – Unicast Addresses, Continued...

Once a static MAC address has been added, it will be displayed in a list on the main page under Unicast MACs tab.

Display Static Unicast MAC Addresses

Static Unicast MAC Address Filters		
MAC Address	Port	VLAN ID
00:07:af:00:00:00	TX1	1

Number of Static Unicast MAC Addresses: **1**

Following the Remove button on the example above, an administrator can select a static MAC address from the list using a pull-down menu. After selecting the MAC address, the administrator needs to press the Remove button on the page to remove the entry

Remove Unicast MAC Address Filter

Mac Address

00:07:af:00:00:00 ▼

Number of Static Unicast MAC Addresses: **1**

Bridging – Multicast Addresses

The Multicast Addresses tab under the Bridging category will display a list of Multicast Group Addresses that are associated with respective port numbers. This may be used to statically assign a Multicast Group Address access to a group of ports on the switch.

Display Static Multicast Group Addresses

Static Multicast Group Address Filters		
Multicast Address	Port List	VLAN ID

Number of Static Multicast Group Addresses: 0

Following the Add button on the page above, the administrator must enter a valid Multicast Group Address and associate it with a port number or list on the switch. Once the administrator clicks on the Add button, the changes will take effect instantly.

Add Multicast Group Address Filter

Multicast Address	01:07:AF:00:00:00			
Port List	☒ TX1	☒ TX2	☒ TX3	☒ TX4
	☐ TX5	☐ TX6	☐ TX7	☐ TX8
VLAN ID	1			

Note: If there are multiple ports on different VLANs, the 708M12 or 716M12 will apply the static multicast address to the lowest VLAN-ID that is associated with one of the ports assigned to the static multicast address. So if the lowest VLAN-ID contains all the ports assigned to the static multicast address (an umbrella VLAN), it will function for all those ports with no problems. This can be achieved with overlapping VLANs.

Bridging – Multicast Addresses Continued...

After adding a Multicast Group Address, it will appear on the main list and will show the associated ports that go along with that address.

Display Static Multicast Group Addresses

Static Multicast Group Address Filters		
Multicast Address	Port List	VLAN ID
01:07:af:00:00:00	TX1, TX2, TX3, TX4	1

Number of Static Multicast Group Addresses: 1

Following the Remove button on the example above, the administrator will be presented with a list of Multicast Group Addresses that are configured on the switch. Using the pull-down menu, the administrator should select the desired address to be removed. Then click on the Remove button at the bottom of the page.

Remove Multicast Group Address Filter

Mac Address

01:07:af:00:00:00 ▼

Number of Static Multicast Group Addresses: 1

Note: *If there are multiple ports on different VLANs, the 708M12 or 716M12 will apply the static multicast address to the lowest VLAN-ID that is associated with one of the ports assigned to the static multicast address. So if the lowest VLAN-ID contains all the ports assigned to the static multicast address (an umbrella VLAN), it will function for all those ports with no problems. This can be achieved with overlapping VLANs.*

Bridging – Show MAC by Port

This feature shows the MAC addresses of devices connected to each switch port and the IP Addresses associated with the MACs. The browser page ‘View MAC by Port’ shows the MAC for the device found on each port, and the IP for the MAC presented if available. If more than one device is on that port, then the lowest alphanumeric of those MAC addresses is shown and underlined.

View MAC By Port

Active IP Probe

Enabled

Modify


MACs By Port				
Port No	Port Name	MAC Address	IP	Manual Entry
01	TX1			
02	TX2	00:07:af:01:93:de	<u>192.168.1.222</u>	Delete IP
03	TX3	00:1e:4f:bc:68:62	192.168.1.118	
04	TX4			
05	TX5			
06	TX6	00:07:af:fd:57:e0	192.168.1.225	
07	TX7	00:07:af:fb:e0:b0	192.168.1.247	
08	TX8	00:07:af:00:e4:0f		Assign IP

Refresh

The ‘Active IP Probe’ field is configurable using the ‘Modify’ button, and also displays the existing Enabled or Disabled status of this feature. The default is disabled. When disabled the switch generates no Ethernet traffic for this purpose, but can still present some information gathered passively.

The ‘IP’ field shows an Auto-detected or manually entered IP address. If there is a MAC address for the port and an IP address was not discovered there is an ‘Assign IP’ button to allow the user to enter an IP address. If ‘Active IP Probe’ is enabled, manually entered IP values are underlined and validated. A validated IP for that MAC is presented in green and if validation fails the IP will be red and underlined. Note that some devices do not have an IP Address, and that some devices that do have an IP Address may not respond to the methods used to detect their IP Address.

Invoking the 'Assign IP' button on the example above, the administrator will be presented with a form in which to enter a manually assigned IP, as below:

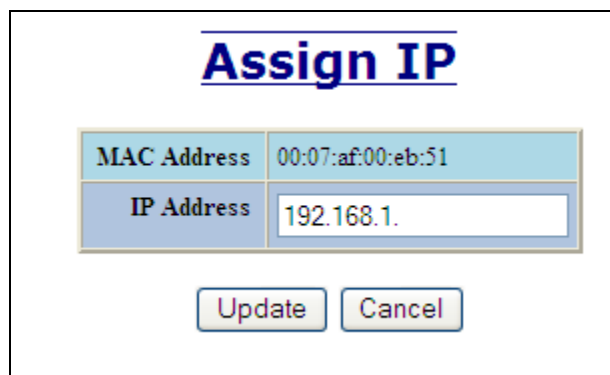

The image shows a web form titled "Assign IP" in a large, bold, blue font. Below the title is a table with two rows. The first row has a label "MAC Address" in a light blue box and a text input field containing "00:07:af:00:eb:51". The second row has a label "IP Address" in a light blue box and a text input field containing "192.168.1.". Below the table are two buttons: "Update" and "Cancel", both with a light blue background and a thin border.

Assign IP	
MAC Address	00:07:af:00:eb:51
IP Address	192.168.1.

When an IP has been manually entered a button is provided to 'Delete IP', and invoking it will allow the administrator to delete the manual association of an IP to that MAC.

RSTP – Configuration

The Configuration tab under the RSTP category will display the RSTP information for the first VLAN. Using the pull-down menu at the top of the page an administrator can choose which VLAN to configure RSTP on. Once the VLAN is selected, the administrator may configure the bridge by clicking on the ‘Configuration’ link in the middle of the page.

RSTP Configuration View

VLAN 1 - Default VLAN ▼

RSTP Root Bridge Configuration

Root Priority	Designated Root	Path Cost	Port	Max Age	Hello Time	Forward Delay
32768	80:00:00:07:af:ff:ae:e1	0	0	16	1	13

This Bridge [Configuration](#)

Hello Time (Sec)	Forward Delay (Sec)	Max Age (Sec)	Priority	RSTP Status	Topology Change	Topology Count
1	13	16	32768	Fast	False	0

Refresh

RSTP – Configuration Continued...

The configuration screen for the VLAN that was previously selected will look like the example below. Here the administrator can make changes such as the Hello Time, Forward Delay, Max Age, Priority, and the Status of RSTP on that VLAN. The administrator or user can see the current RSTP status of the ports on that VLAN by clicking on the 'here' link to view RSTP Port Configuration at VLAN#.

RSTP Bridge Configuration For VLAN 1

VLAN	0001 - Default VLAN
Hello Time	1
Forward Delay	13
Max Age	16
Priority	32768 ▼
Status	Fast ▼

Click [here](#) to view the RSTP port Configuration at VLAN 1

Note: *It is recommended that RSTP rings consist of RSTP capable switches.
Trunking must be disabled in order to use RSTP.
Do not create redundant links unless either RSTP or N-Ring is enabled.
RSTP on overlapping VLANs is not supported and the system will automatically disable RSTP on all but the lowest VID VLANs that have overlapping ports.*

RSTP – Configuration Continued...

Following the link for the view RSTP Port Configuration at VLAN#, the administrator or user can see the current RSTP status of the ports on that VLAN. This will show information such as the Path Cost and the Port State. If the switch sees a redundant path it will put the port with the highest Path Cost into Blocking mode where it will discard packets coming in on that port. In the example below, TX3 is a redundant port with port TX2, therefore TX2 is forwarding and TX3 is discarding.

RSTP Configuration View For VLAN 1									
Bridge Port Configuration									
Port No	Port Name	Port State	Path Cost	Priority	STP BPDU	Auto Edge	Admin Edge	Designated Bridge	Designated Port
01	TX1	Disabled	2000000	128	No	Enabled	Disabled	00:00:00:00:00:00:00:00	00:01
02	TX2	Forwarding	200000	128	No	Enabled	Disabled	80:00:00:07:aff:9c:e1	00:02
03	TX3	Discarding	200000	128	No	Enabled	Disabled	80:00:00:07:aff:9c:e1	00:02
04	TX4	Disabled	2000000	128	No	Enabled	Disabled	00:00:00:00:00:00:00:00	00:04
05	TX5	Disabled	2000000	128	No	Enabled	Disabled	00:00:00:00:00:00:00:00	00:05
06	TX6	Disabled	2000000	128	No	Enabled	Disabled	00:00:00:00:00:00:00:00	00:06
07	TX7	Forwarding	200000	128	No	Enabled	Disabled	80:00:00:07:aff:9c:e1	00:07
08	TX8	Disabled	2000000	128	No	Enabled	Disabled	00:00:00:00:00:00:00:00	00:08

<< Back Refresh

If the administrator selects one of the ports on the previous screen, he or she can change the Port's Path Cost, Priority, and the status of Admin Edge and Auto Edge.

RSTP Bridge Port Configuration	
VLAN	0001 - Default VLAN
Port Name	TX8
Path Cost	0
Priority	128 v
Admin Edge	Disabled v
Auto Edge	Enabled v
Update Cancel	

IGMP – Configuration

The Configuration tab under the IGMP category will display the IGMP basic configuration settings. By default, IGMP is enabled.

IGMP Configuration View

IGMP Status	Enabled
Query Mode	Auto
Router Mode	Auto
Remove Unused Groups	☒
Manual Router Ports	(None)
N-Ring Router Ports	(None)
N-Link Router Port	(None)

ModifyRefresh

Following the Modify button, the administrator will see a list of configurable fields for the IGMP configuration. Once these fields are filled in to meet the needs of the administrator's network, the changes may be updated by clicking the Update button at the bottom of the page.

IGMP Configuration

IGMP Status	Enabled v
Query Mode	Auto v
Router Mode	Auto v
Remove Unused Groups	☒
Manual Router Ports	☐ TX1 ☐ TX2 ☐ TX3 ☐ TX4 ☐ TX5 ☐ TX6 ☐ TX7 ☐ TX8 ☐ TX9 ☐ TX10 ☐ TX11 ☐ TX12 ☐ TX13 ☐ TX14 ☐ TX15 ☐ TX16 Select All Select None

UpdateCancel

IGMP – Configuration, Continued...

The Configuration tab under the IGMP category will display the IGMP basic configuration settings. By default, IGMP is enabled.

IGMP Configuration View

IGMP Status	Enabled
Query Mode	Auto
Router Mode	Auto
Remove Unused Groups	☒
Manual Router Ports	(None)
N-Ring Router Ports	(None)
N-Link Router Port	(None)

ModifyRefresh

Following the Modify button, the administrator will see a list of configurable fields for the IGMP configuration. Once these fields are filled in to meet the needs of the administrator's network, the changes may be updated by clicking the Update button at the bottom of the page.

IGMP Configuration

IGMP Status	Enabled ▾
Query Mode	Auto ▾
Router Mode	Auto ▾
Remove Unused Groups	☒
Manual Router Ports	☐ TX1 ☐ TX2 ☐ TX3 ☐ TX4 ☐ TX5 ☐ TX6 ☐ TX7 ☐ TX8 ☐ TX9 ☐ TX10 ☐ TX11 ☐ TX12 ☐ TX13 ☐ TX14 ☐ TX15 ☐ TX16 <button>Select All</button><button>Select None</button>

UpdateCancel

IGMP – Configuration, Continued...

The IGMP Status pull-down allows the user to enable or disable IGMP completely.

IGMP Configuration

IGMP Status	Enabled ▾
Query Mode	Disabled Enabled
Router Mode	Auto ▾
Remove Unused Groups	☒
Manual Router Ports	☐ TX1 ☐ TX2 ☐ TX3 ☐ TX4 ☐ TX5 ☐ TX6 ☐ TX7 ☐ TX8 Select All Select None

The Query Mode pull-down allows the user to set query mode for Automatic (the default), On (always), or Off (never):

IGMP Configuration

IGMP Status	Enabled ▾
Query Mode	Auto ▾
Router Mode	Off On Auto
Remove Unused Groups	☒
Manual Router Ports	☐ TX1 ☐ TX2 ☐ TX3 ☐ TX4 ☐ TX5 ☐ TX6 ☐ TX7 ☐ TX8 ☐ TX9 ☐ TX10 ☐ TX11 ☐ TX12 ☐ TX13 ☐ TX14 ☐ TX15 ☐ TX16 Select All Select None

IGMP – Configuration, Continued...

The Router Mode pull-down allows the user to choose router mode. 'Auto' allows for dynamically detected and manually set router ports. 'Manual' allows only for manually set router ports. 'None' allows no router ports.

IGMP Configuration

IGMP Status	Enabled ▾
Query Mode	Auto ▾
Router Mode	Auto ▾
Remove Unused Groups	None Manual Auto
Manual Router Ports	☐ TX1 ☐ TX2 ☐ TX3 ☐ TX4 ☐ TX5 ☐ TX6 ☐ TX7 ☐ TX8 ☐ TX9 ☐ TX10 ☐ TX11 ☐ TX12 ☐ TX13 ☐ TX14 ☐ TX15 ☐ TX16 Select All Select None

Update

Cancel

IGMP – Configuration, Continued...

If **Remove Unused Groups** is checked then unused IGMP Groups will be removed and traffic with those multicast addresses will be treated as normal multicast. If unchecked, then unused IGMP Groups are not removed and traffic with those multicast addresses will be limited. The default is checked. Note that IGMP Groups are not retained through a power cycle.

IGMP Configuration

IGMP Status	Disabled ▾
Query Mode	Auto ▾
Router Mode	Auto ▾
Remove Unused Groups	☒
Manual Router Ports	☐ TX1 ☐ TX2 ☐ TX3 ☐ TX4 ☐ TX5 ☐ TX6 ☐ TX7 ☐ TX8 Select All Select None

Update Cancel

The user can specify the manual router ports:

IGMP Configuration

IGMP Status	Enabled ▾
Query Mode	Auto ▾
Router Mode	Auto ▾
Remove Unused Groups	☒
Manual Router Ports	☒ TX1 ☐ TX2 ☐ TX3 ☐ TX4 ☐ TX5 ☐ TX6 ☐ TX7 ☐ TX8 ☐ TX9 ☐ TX10 ☒ TX11 ☐ TX12 ☐ TX13 ☒ TX14 ☐ TX15 ☐ TX16 Select All Select None

Update Cancel

IGMP – Show Groups and Show Router

The Show Groups tab under the IGMP category will display a list of IGMP groups based on the Group IP and the port number that it is associated with.

IGMP Group View		
Total Number Of Active IP Group Memberships		9
Group IP	Port Name	VLAN ID
224.10.10.10	TX2	1
224.10.10.10	TX3	1
224.10.10.10	TX4	1
224.10.10.11	TX6	1
224.10.10.11	TX7	1
224.10.8.13	TX8	1
224.10.8.12	TX8	1
224.10.8.9	TX8	1
239.255.255.250	TX8	1
Refresh		

The Show Routers tab under the IGMP category will display a list of Auto-detected Router IPs and the port numbers that they are associated with.

Auto-Detected Routers View		
Router IP	Port Name	VLAN ID
192.9.9.3	TX6	1
192.168.1.231	TX8	1
192.168.1.242	TX8	1
192.168.1.232	TX8	1
Refresh		

IGMP – RFilter

The 'rfilter' (**Router Multicast Data Filter**) function allows you to choose whether or not DATA frames with KNOWN group multicast addresses are sent to the 'router' ports (links to other switches). Control packets (Join, Leave) will be sent to the router(s) regardless of this setting. "KNOWN" is known from dynamic IGMP Snooping operations.

The factory default is that the Router Multicast Data Filter is enabled for all ports, so any router ports do NOT get DATA frames with KNOWN multicast destination addresses unless a join to a specific multicast address has been received on that port. **Joins override an rfilter.**

If rfilter is disabled, router ports do get DATA frames with KNOWN multicast destination addresses

Rfilter can be set for individual ports: any, all, or none. For each port, rfilter will have an impact only if that port is manually or dynamically chosen as a router port.

Default configuration:

IGMP RFilter Configuration View		
Port No	Port Name	Rfilter State
01	TX1	Enabled
02	TX2	Enabled
03	TX3	Enabled
04	TX4	Enabled
05	TX5	Enabled
06	TX6	Enabled
07	TX7	Enabled
08	TX8	Enabled
Modify Refresh		

IGMP – RFilter, Continued...


Modifying rfilter port settings:

IGMP RFilter Configuration

Port No	Port Name	Rfilter Enabled?
01	TX1	☒
02	TX2	☒
03	TX3	☒
04	TX4	☒
05	TX5	☒
06	TX6	☒
07	TX7	☒
08	TX8	☒

N-View – Configuration

The Configuration tab under the N-View category will display two basic variables for N-View, the status and the interval between packets.

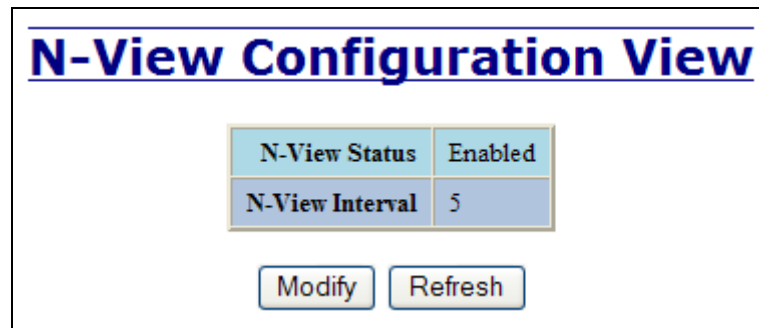


N-View Configuration View

N-View Status	Enabled
N-View Interval	5

Modify Refresh

Following the Modify button on the above example, the administrator can modify the variable to change the frequency with which N-View reports information. Increasing the interval will slow the update rate. Decreasing the interval will allow N-View to report more frequently. Additionally, you may Disable or Enable N-View altogether.

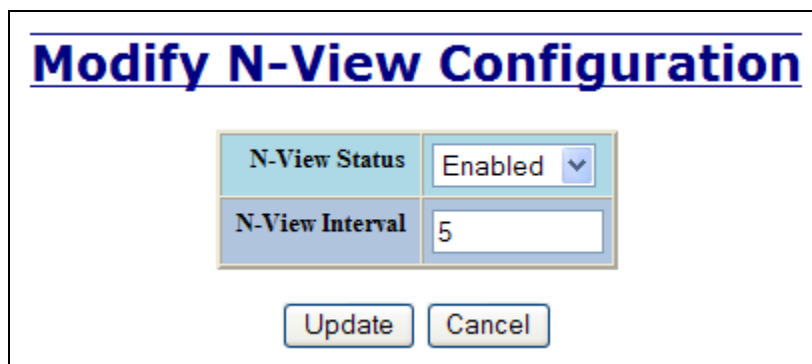

Modify N-View Configuration

N-View Status	Enabled ▼
N-View Interval	5

Update Cancel

N-View – Ports

The Ports tab under the N-View category will display a list of all the configured ports on the 708M12 or 716M12 unit along with the ports transmitting multicast packets and MIB stats respectively.

N-View Ports View

Port Name	Multicast On Port?	Send MIB Stats?
TX1	YES	YES
TX2	YES	YES
TX3	YES	YES
TX4	YES	YES
TX5	YES	YES
TX6	YES	YES
TX7	YES	YES
TX8	YES	YES

ModifyRefresh

Following the Modify button on the above example, the administrator can modify these two variables to enable or disable multicast out of the port and if MIB stats are sent out for those ports.


Modify N-View Ports

Port Name	Multicast On Port?	Send MIB Stats?
TX1	☒	☒
TX2	☒	☒
TX3	☒	☒
TX4	☒	☒
TX5	☒	☒
TX6	☒	☒
TX7	☒	☒
TX8	☒	☒

UpdateCancel


N-Ring – Configuration

The Configuration tab under the N-Ring category will display the N-Ring basic configuration settings. By default, N-Ring is in Auto Member mode and the N-Ring Aging Time is 20 seconds.

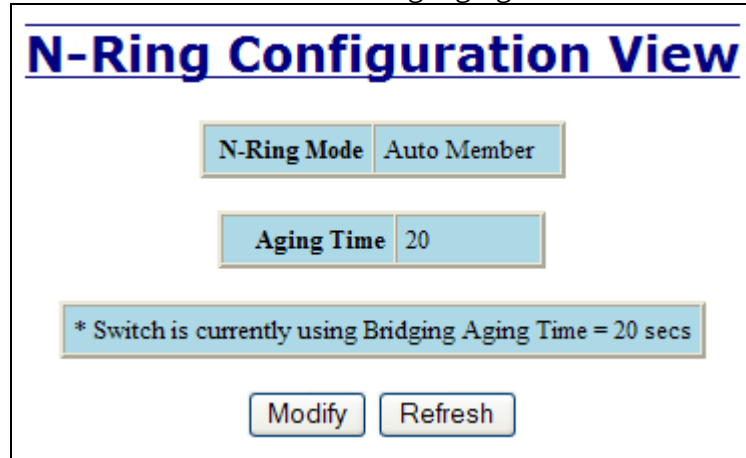

The screenshot shows the 'N-Ring Configuration View' window. It has a title bar with the text 'N-Ring Configuration View'. Inside, there are two main configuration sections. The first section is labeled 'N-Ring Mode' and has a dropdown menu set to 'Auto Member'. The second section is labeled 'Aging Time' and has a text input field containing the value '20'. Below these sections, there is a status message: '* Switch is currently using Bridging Aging Time = 20 secs'. At the bottom of the window, there are two buttons: 'Modify' and 'Refresh'.

Following the Modify button on the above example, the administrator will see a list of configurable fields for the N-Ring configuration, as below.

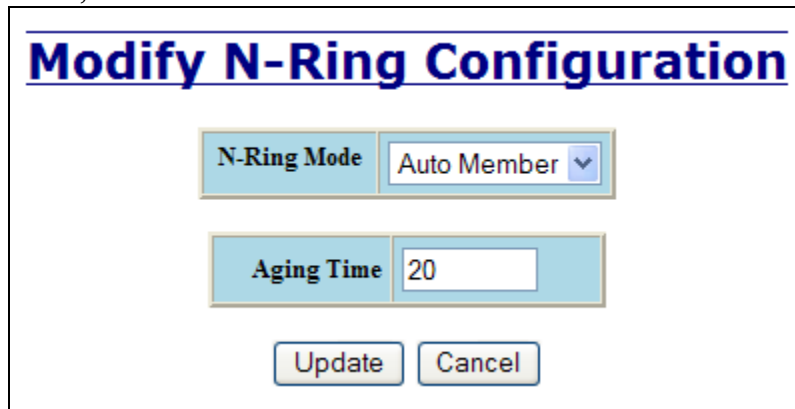

The screenshot shows the 'Modify N-Ring Configuration' window. It has a title bar with the text 'Modify N-Ring Configuration'. Inside, there are two main configuration sections. The first section is labeled 'N-Ring Mode' and has a dropdown menu set to 'Auto Member'. The second section is labeled 'Aging Time' and has a text input field containing the value '20'. Below these sections, there are two buttons: 'Update' and 'Cancel'.

The N-Ring Aging Time has a default of 20 seconds and is separate from the Bridging Aging Time. N-Ring Aging Time is used when the switch is an N-Ring Manager or becomes an active N-Ring Member, and in either case N-Ring status includes for example:

“Switch is currently using N-Ring Aging Time = 20 Seconds”

Once these fields are filled in to meet the needs of the administrator’s network, the changes may be saved by clicking the Update button at the bottom of the page.

NOTES:

1. ***N-Ring Manager cannot have RSTP or Trunking enabled.***
2. ***RSTP & N-Ring are different modes and cannot share links or segments along those lines. See the examples in the RSTP configuration section.***
3. ***Do not use Trunking on an N-Ring manager. Do not connect the N-Ring to actively Trunking ports on an Auto Member.***
4. ***Do not create redundant links unless either RSTP or N-Ring is enabled.***
5. ***Any one 708M12 or 716M12 can only participate in one N-Ring.***
6. ***N-Ring copper ports must be run at 100Mb full duplex, including the default ‘autonegotiate’ as long as all switches in the ring support 100Mb full duplex.***

N-Ring – Configuration, Continued...

The “N-Ring Mode” is one of three, as below:

Modify N-Ring Configuration

N-Ring Mode	Auto Member ▼
	Disabled
	Auto Member
	Manager
Aging Time	

Update Cancel

If N-Ring Mode is “Manager”, then a pull-down allows selection as available of ports TX1 and TX2, or TX7 and TX8 (FX1 and FX2 on 708FX2) (TX15 & TX16 on 716M12) as N-Ring ports.

Modify N-Ring Configuration

N-Ring Mode	Manager ▼
Aging Time	20
N-Ring Ports	TX1 / TX2 ▼
	TX1 / TX2
	TX7 / TX8
VLAN ID	
Tagging	Tagged ▼

Update Cancel

N-Ring – Configuration, Continued...

If N-Ring Mode is “Manager”, then VLAN ID can be set to a unique VLAN id (1 ~ 4094). Default is 3333.

If N-Ring Mode is “Manager”, then a pull-down allows selection as to whether the N-Ring ports are members of the VLAN’s Tagged or Untagged ports. Default is Tagged.

Modify N-Ring Configuration

N-Ring Mode	Manager
Aging Time	20
N-Ring Ports	TX1 / TX2
VLAN ID	3333
Tagging	Tagged

Update

Once these fields are filled in to meet the needs of the administrator’s network, the changes may be saved by clicking the Update button at the bottom of the page.

NOTES:

1. *Since VLANs are implemented for security reasons as well as traffic flow, N-Ring only makes minimal changes. It is up to the administrator to ensure that VLANs are configured correctly on the N-Ring manager and all N-Ring members.*
2. *When the N-Ring manager and all N-Ring Members are in defaults, changing the N-Ring manager to use a Tagged VLAN requires no user interaction to allow non-ring traffic to pass through the ring. This works because changing to a Tagged VLAN does not remove the ring ports from the default VLAN.*
3. *When the N-Ring manager and all N-Ring Members are in defaults, changing the N-Ring manager to use an Untagged VLAN other than VID 1, requires the administrator to add non-ring ports to the N-Ring VLAN to allow non-ring traffic to pass through the ring. This occurs because the N-Ring ports must be removed from VID 1 because an untagged port may only be a member of one VLAN.*

N-Ring – Advanced Configuration

If switch is an N-Ring Member, the following data will be shown:

N-Ring Mode

Current N-Ring mode of switch.

Keep-Alive Timeout:

Keep-Alive timeout is used when switch is active in an N-Ring. The range is 5-1000000 seconds.

N-Ring Advanced Configuration View

N-Ring Mode	Auto Member
Keep-Alive Timeout (Secs)	31
Modify	Refresh

Modify N-Ring Advanced Configuration

N-Ring Mode	Auto Member
Keep-Alive Timeout (Secs)	31
Update	Cancel

If switch is an N-Ring Manager, the following advanced configuration data will be shown:

N-Ring Mode

Current N-Ring mode of switch.

Self Health Packet Interval:

The amount of time to wait in milliseconds before sending Self-Health packets. The default is 10.

Maximum Missed Packets

The number of missed Self-Health packets that constitute a fault. The default is 2.

Sign-On Delay

The amount of time to wait in milliseconds before requesting initial sign-on information from ring members. The default is 1000.

Sign-On Match Packets

The number of times the switch count must match before starting the sign-on process. The default is 3.

Sign-On Interval

The interval of time to wait in milliseconds before requesting subsequent sign-on information from ring members when the ring is broken. The default is 3000.

Sign-On Info Spacing Multiplier

The amount of time to wait in milliseconds, scaled by switch number, before sending information to the ring manager. The default is 5.

Sign-On Info Retry Timeout

The amount of time the ring member will wait in milliseconds for the ring manager to acknowledge receipt of the member's information before the member tries to re-send the information. The default is 1500.

Delay Before Re-Entering Broken State

The amount of time, in milliseconds, that must elapse before the ring is allowed to go back into the broken state. The default is 3000.

N-Ring – Advanced Configuration, Continued...

N-Ring OK

N-Ring Advanced Configuration View

N-Ring Mode Manager

Self Health Packet Interval (Msecs)	10
Maximum Missed Packets	2
Sign-On Delay (Msecs)	1000
Sign-On Match Packets	3
Sign-On Interval (Msecs)	3000
Sign-On Info Spacing Multiplier (Msecs)	5
Sign-On Info Retry Timeout (Msecs)	1500
Delay Before Re-Entering Broken State (Msecs)	3000

Modify Refresh

N-Ring OK

Modify N-Ring Advanced Configuration

N-Ring Mode Manager

Self Health Packet Interval (Msecs)	10
Maximum Missed Packets	2
Sign-On Delay (Msecs)	1000
Sign-On Match Packets	3
Sign-On Interval (Msecs)	3000
Sign-On Info Spacing Multiplier (Msecs)	5
Sign-On Info Retry Timeout (Msecs)	1500
Delay Before Re-Entering Broken State (Msecs)	3000

Update Cancel

N-Ring – Status

The Status tab under the N-Ring category will display the N-Ring status.

Below is an example of N-Ring Status from a switch in defaults (N-Ring Auto Member) that is not an N-Ring Manager and has not become an “Active” N-Ring Member:

N-Ring Status View

N-Ring Mode	Auto Member
-------------	-------------

Switch is in Auto Member Detection Mode

Below is an example of N-Ring Status from an “Active” N-Ring Member:

N-Ring Status View

N-Ring Mode	Auto Member
-------------	-------------

Switch is an N-Ring Member

N-Ring Manager Address	
00:07:af:ff:af:00	

Active N-Ring Ports	
TX1	TX2

* Switch is currently using N-Ring Aging Time = 20 secs

N-Ring – Status, Continued...

Below is an example of N-Ring Status from an N-Ring Manager with a healthy N-Ring:

N-Ring OK

N-Ring Status View

Switch is an N-Ring Manager, using N-Ring Aging Time = 20 Seconds

Refresh everysecs.

14 Active Members Detected In Current N-Ring (14 reporting)

Switch No	MAC Address	IP Address	Subnet Mask	Name	Ports
RM	00:07:af:ff:8a:80	192.168.1.108	255.255.255.0	N-Tron Switch	TX2 TX1
1	00:07:af:ff:c9:20	192.168.1.245	255.255.255.0	N-Tron Switch	TX2 TX1
2	00:07:af:ff:c8:80	192.168.1.226	255.255.255.0	N-Tron Switch	TX2 TX1
3	00:07:af:ff:8a:60	192.168.1.104	255.255.255.0	N-Tron Switch	TX2 TX1
4	00:07:af:ff:b8:00	192.168.1.225	255.255.255.0	N-Tron Switch	TX2 TX1
5	00:07:af:ff:8a:c0	192.168.1.101	255.255.255.0	N-Tron Switch	TX2 TX1
6	00:07:af:ff:af:20	192.168.1.235	255.255.255.0	N-Tron Switch	TX2 TX1
7	00:07:af:ff:8a:e0	192.168.1.100	255.255.255.0	N-Tron Switch	TX2 TX1
8	00:07:af:ff:8a:00	192.168.1.105	255.255.255.0	N-Tron Switch	TX2 TX1
9	00:07:af:ff:8f:e0	192.168.1.239	255.255.255.0	N-Tron Switch	TX2 TX1
10	00:07:af:ff:8c:00	192.168.1.126	255.255.255.0	N-Tron Switch	TX2 TX1
11	00:07:af:ff:8a:20	192.168.1.102	255.255.255.0	N-Tron Switch	TX2 TX1
12	00:07:af:ff:c8:60	192.168.1.249	255.255.255.0	N-Tron Switch	TX2 TX1
13	00:07:af:ff:8b:00	192.168.1.110	255.255.255.0	N-Tron Switch	TX2 TX1
14	00:07:af:ff:8e:60	192.168.1.127	255.255.255.0	N-Tron Switch	TX2 TX1

N-Ring – Status, Continued...

Below is an example of N-Ring Status from an N-Ring Manager with a faulted N-Ring. The red fields on the N-Ring Map show problems. Ports that are red indicate that the port is not linked. MAC addresses that are red indicate that there is no communication to that switch. The red “Ring Broken” line shows where the N-Ring is broken.

N-Ring Fault

N-Ring Status View

Switch is an N-Ring Manager, using N-Ring Aging Time = 20 Seconds

Refresh every secs. Update Pause Print...

The total number of Active N-Ring Members is unknown. (13 reporting)

Switch order may be incorrect and all switches may not be shown.

Switch No	MAC Address	IP Address	Subnet Mask	Name	Ports
RM	00:07:af:ff:8a:c0	192.168.1.101	255.255.255.0	N-Tron Switch	FX2 FX1
1	00:07:af:ff:c8:60	192.168.1.249	255.255.255.0	N-Tron Switch	FX2 FX1
2	00:07:af:ff:c9:20	192.168.1.245	255.255.255.0	N-Tron Switch	FX2 FX1
3	00:07:af:ff:8a:80	192.168.1.108	255.255.255.0	N-Tron Switch	FX2 FX1
4	00:07:af:ff:6d:00	192.168.1.211	255.255.255.0	N-Tron Switch	FX2 FX1
5	00:07:af:ff:75:80	192.168.1.207	255.255.255.0	N-Tron Switch	FX2 FX1
6	00:07:af:ff:75:60	192.168.1.205	255.255.255.0	N-Tron Switch	FX2 FX1
7	00:07:af:ff:75:e0	192.168.1.203	255.255.255.0	N-Tron Switch	FX2 FX1
8	00:07:af:ff:76:00	192.168.1.234	255.255.255.0	N-Tron Switch	FX2 FX1
~~~~ Ring Broken ~~~~					
9	<a href="#">00:07:af:ff:6c:e0</a>	192.168.1.210	255.255.255.0	N-Tron Switch	<b>FX2</b> FX1
10	<a href="#">00:07:af:ff:75:c0</a>	192.168.1.237	255.255.255.0	N-Tron Switch	FX2 FX1
11	<a href="#">00:07:af:ff:75:a0</a>	192.168.1.206	255.255.255.0	N-Tron Switch	FX2 FX1
12	<a href="#">00:07:af:ff:c8:80</a>	192.168.1.213	255.255.255.0	N-Tron Switch	FX2 FX1
13	<a href="#">00:07:af:ff:8f:c0</a>	192.168.1.246	255.255.255.0	N-Tron Switch	FX2 FX1
14	<a href="#">00:07:af:ff:8a:20</a>	192.168.1.102	255.255.255.0	N-Tron Switch	FX2 FX1

## N-Ring – Status, Continued...

In rare cases an N-Ring can have a “Partial Fault”. An example of this is to have a break in just one fiber in a duplex channel fiber pair. The screenshot below shows N-Ring Manager Status when a ‘Higher’ N-Ring Port (TX2, TX8, or TX16) is not receiving self health frames all the way around the N-Ring, though the other (low TX1, TX7, or TX15) N-Ring port is:

**N-Ring Partial Fault (TX2 is not receiving self health from TX1)**

### N-Ring Status View

Switch is an N-Ring Manager, using N-Ring Aging Time = 20 Seconds

Refresh every  secs.

---

1 Active Members Detected In Current N-Ring (1 reporting)

Switch No	MAC Address	IP Address	Subnet Mask	Name	Ports
RM	<a href="#">00:07:af:ff:af:00</a>	192.168.1.238	255.255.255.0	N-Tron Switch	TX2 TX1
1	<a href="#">00:07:af:ff:ae:e0</a>	192.168.1.228	255.255.255.0	N-Tron Switch	TX1 TX2

The screenshot below shows N-Ring Manager Status when a ‘Lower’ N-Ring Port (TX1, TX7, or TX16) is not receiving self health frames all the way around the N-Ring, though the other (high TX2 , TX8, or TX15) N-Ring port is:

**N-Ring Partial Fault (TX1 is not receiving self health from TX2)**

### N-Ring Status View

Switch is an N-Ring Manager, using N-Ring Aging Time = 20 Seconds

Refresh every  secs.

---


1 Active Members Detected In Current N-Ring (1 reporting)

Switch No	MAC Address	IP Address	Subnet Mask	Name	Ports
RM	<a href="#">00:07:af:ff:af:00</a>	192.168.1.238	255.255.255.0	N-Tron Switch	TX2 TX1
1	<a href="#">00:07:af:ff:ae:e0</a>	192.168.1.228	255.255.255.0	N-Tron Switch	TX1 TX2

## N-Link – Configuration

The purpose of N-Link is to provide a way to redundantly couple an N-Ring topology to one or more other topologies, usually other N-Ring topologies. Each N-Link configuration requires 4 switches: N-Link Master, N-Link Slave, N-Link Primary Coupler, and N-Link Standby Coupler.

### Standard N-Link Configuration (Example):

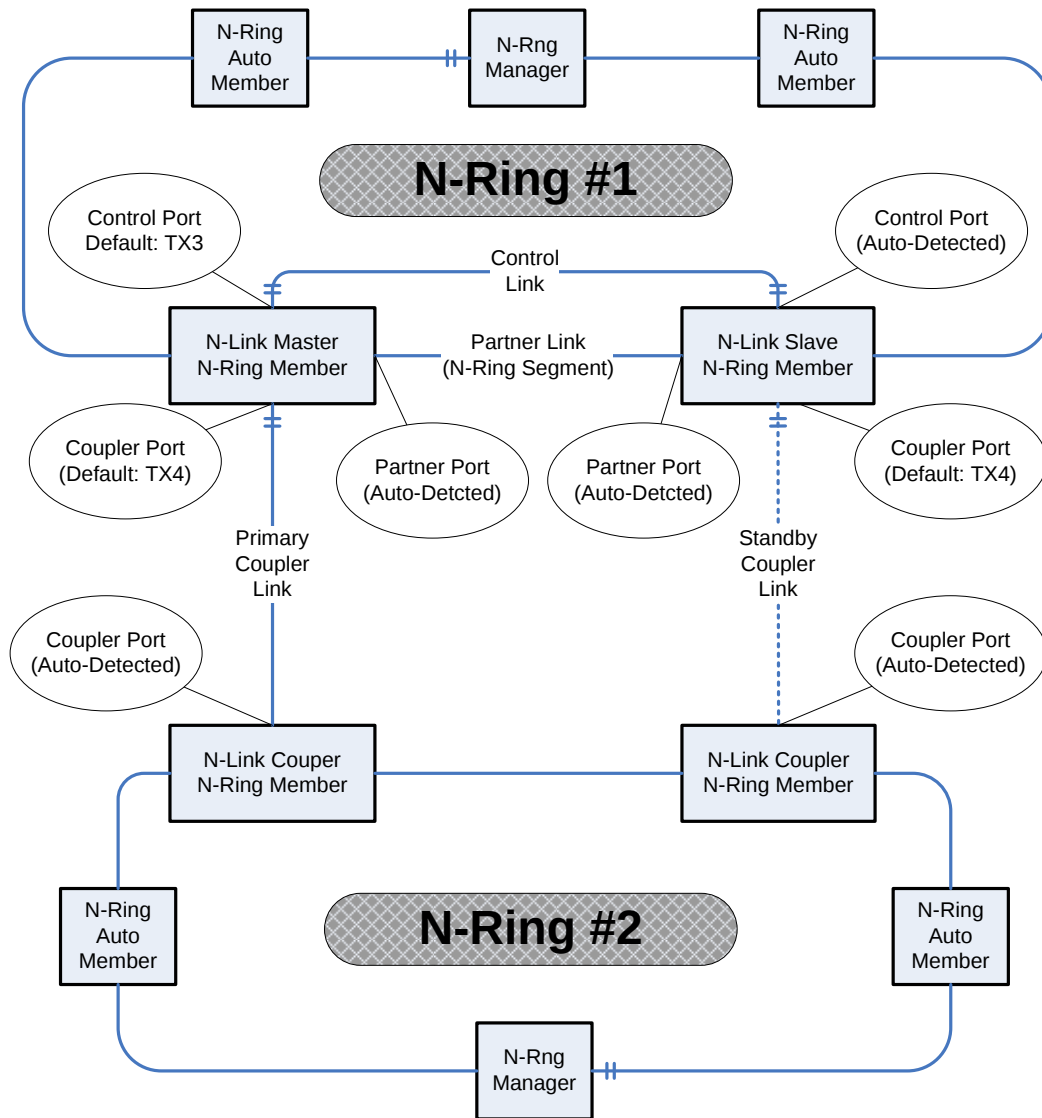

For convenience, a diagram similar to the above is provided in the switch's browser help for N-Link.

### Complex N-Link Configuration (Example):




- ### Configuration Steps to redundantly couple 2 N-Ring networks:

- Page 97 of 170


## N-Link – Configuration, Continued...

The Configuration tab under the N-Link category will display the configuration settings. By default, N-Link is in Auto Configure mode and will use TX4 as the Default Coupler port.

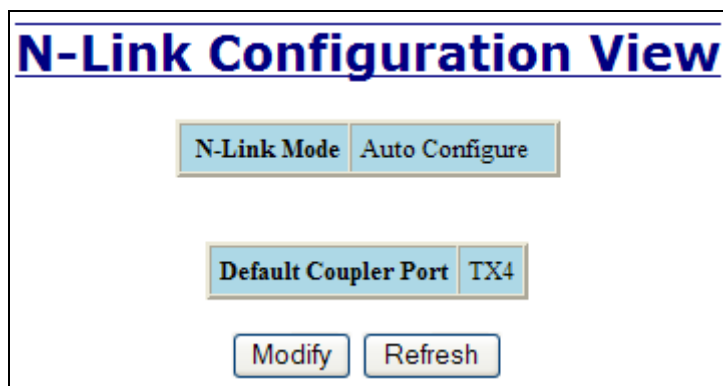

The screenshot shows the 'N-Link Configuration View' interface. It features a title bar with the text 'N-Link Configuration View' in blue. Below the title bar, there are two main configuration sections. The first section is labeled 'N-Link Mode' and contains a button labeled 'Auto Configure'. The second section is labeled 'Default Coupler Port' and contains a button labeled 'TX4'. At the bottom of the interface, there are two buttons: 'Modify' and 'Refresh'.

Following the Modify button on the above example, the administrator will see a list of configurable fields for the N-Link configuration, as below.

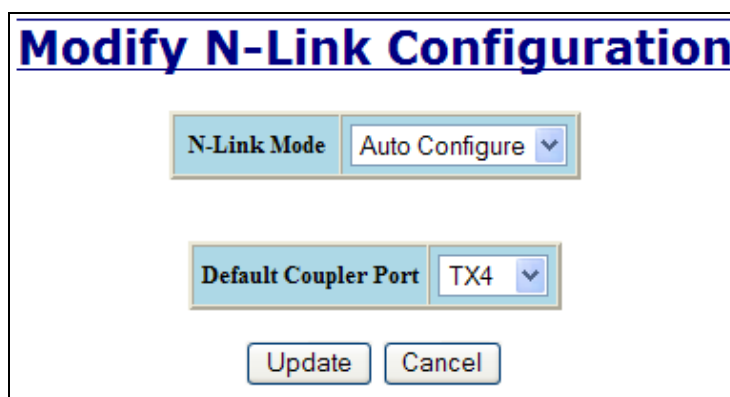


The screenshot shows the 'Modify N-Link Configuration' interface. It features a title bar with the text 'Modify N-Link Configuration' in blue. Below the title bar, there are two main configuration sections. The first section is labeled 'N-Link Mode' and contains a dropdown menu with 'Auto Configure' selected. The second section is labeled 'Default Coupler Port' and contains a dropdown menu with 'TX4' selected. At the bottom of the interface, there are two buttons: 'Update' and 'Cancel'.

The port configured as the Default Coupler Port will be used as the Standby Coupler port if the switch detects an N-Link Master and becomes an N-Link Slave.

Once these fields are filled in to meet the needs of the administrator's network, the changes may be saved by clicking the Update button at the bottom of the page.

## N-Link – Configuration, Continued...

The “N-Link Mode” is one of two choices, as below:

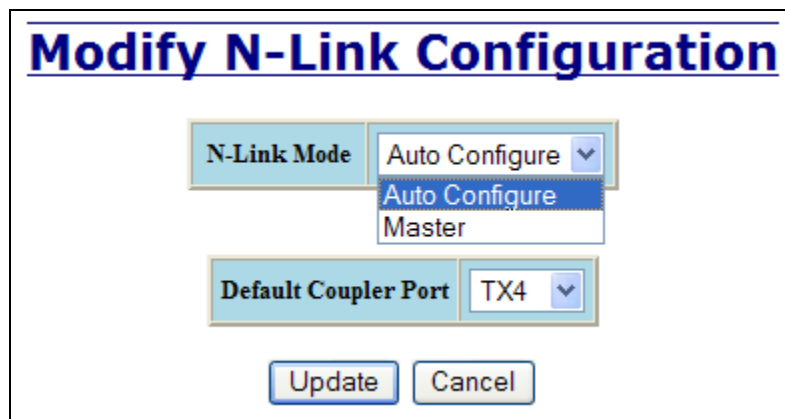


**Modify N-Link Configuration**

N-Link Mode: Auto Configure ▼  
Auto Configure  
Master

Default Coupler Port: TX4 ▼

Update Cancel

If N-Link mode is “Master”, then the administrator must configure the Control Port (default: TX3) and the Primary Coupler Port (default: TX4).

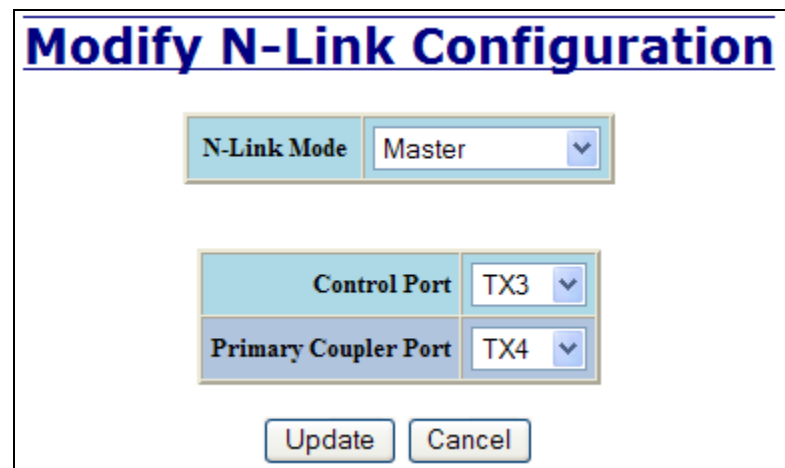

**Modify N-Link Configuration**

N-Link Mode: Master ▼

Control Port: TX3 ▼

Primary Coupler Port: TX4 ▼

Update Cancel

Once these fields are filled in to meet the needs of the administrator’s network, the changes may be saved by clicking the Update button at the bottom of the page.

## N-Link – Status

The Status tab under the N-Link category will display the N-Link status.

If the switch is an N-Link Master or Slave, the following switch status and partner status information will be shown. Fields with a red background designate a fault condition.

<b>State:</b>	Current N-Link mode of switch.
<b>Control Port:</b>	The port being used to convey control information. There must be a direct link between the Master and Slave Control ports. Use of media converters or other switches is not supported.
<b>Partner Port:</b>	The port being used for normal communication between the N-Link Master and N-Link Slave switch. There must be a direct link between the Master and Slave Partner ports. Use of media converters or other switches is not supported. This port will be detected automatically.
<b>Coupler Port:</b>	The port being used to establish a redundant path for Ethernet data transmission.
<b>Coupler Port State:</b>	Blocking, Forwarding.
<b>Status:</b>	No errors will show "OK", otherwise a description of the Faults detected.

### N-Link Partner Information

<b>State:</b>	Current N-Link mode of switch.
<b>MAC:</b>	The MAC Address of the N-Link Partner switch.
<b>Coupler Port State:</b>	Blocking, Forwarding.
<b>Status:</b>	No errors will show "OK", otherwise a description of the Faults detected.

If switch is an N-Link Auto Configure and not a Slave, the Coupler port, if known, will be shown.

<b>N-Link State:</b>	Current N-Link mode of switch.
<b>Coupler Port:</b>	The port used to establish a redundant path for Ethernet data transmission. This port will be detected automatically.

Below is an example of N-Link Status from a switch in defaults (N-Link Auto Configure) that is not an N-Link Master and has not become an N-Link Slave or an N-Link Coupler:

<b>N-Link Status View</b>	
<b>N-Link State</b>	Auto Configure
<b>Coupler Port</b>	(None)

## N-Link – Status, Continued...

Below is an example of N-Link Status from an N-Link Coupler switch:

N-Link Status View	
N-Link State	Auto Configure
Coupler Port	TX4

Below is an example of N-Link Status from an N-Link Master switch:

N-Link Status View	
State	Master
Control Port	TX3
Partner Port	TX1
Coupler Port	TX4
Coupler Port State	Forwarding
Status	OK

N-Link Partner Information	
State	Slave
MAC	00:07:af:fe:af:c0
Coupler Port State	Blocking
Status	OK

## N-Link – Status, Continued...

Below is an example of N-Link Status from an N-Link Slave switch:

N-Link Status View	
State	Slave
Control Port	TX3
Partner Port	TX2
Coupler Port	TX4
Coupler Port State	Blocking
Status	OK

N-Link Partner Information	
State	Master
MAC	00:07:affe:c4:40
Coupler Port State	Forwarding
Status	OK

Below is an example of N-Link Status from an N-Link Master and Slave where the Primary Coupler link is broken:

### N-Link Status View

State	Master
Control Port	TX3
Partner Port	TX1
Coupler Port	TX4
Coupler Port State	Blocking
Status	Redundancy lost. Primary Coupler failure.

N-Link Partner Information	
State	Slave
MAC	00:07:affe:af:c0
Coupler Port State	Forwarding
Status	OK

### N-Link Status View

State	Slave
Control Port	TX3
Partner Port	TX2
Coupler Port	TX4
Coupler Port State	Forwarding
Status	OK

N-Link Partner Information	
State	Master
MAC	00:07:affe:c4:40
Coupler Port State	Blocking
Status	Redundancy lost. Primary Coupler failure.

## N-Link – Status, Continued...

Below is an example of N-Link Status from an N-Link Master and Slave where the Standby Coupler link is broken:

### N-Link Status View

State	Master
Control Port	TX3
Partner Port	TX1
Coupler Port	TX4
Coupler Port State	Forwarding
Status	OK

### N-Link Status View

State	Slave
Control Port	TX3
Partner Port	TX2
Coupler Port	TX4
Coupler Port State	Blocking
Status	Redundancy lost. Standby Coupler failure.

N-Link Partner Information	
State	Slave
MAC	00:07:affe:afc0
Coupler Port State	Blocking
Status	Redundancy lost. Standby Coupler failure.

N-Link Partner Information	
State	Master
MAC	00:07:affe:c4:40
Coupler Port State	Forwarding
Status	OK

Below is an example of N-Link Status from an N-Link Master and Slave where the Control link is broken:

### N-Link Status View

State	Master
Control Port	TX3
Partner Port	TX1
Coupler Port	TX4
Coupler Port State	Forwarding
Status	Redundancy lost. Control failure.

### N-Link Status View

State	Slave
Control Port	TX3
Partner Port	TX2
Coupler Port	TX4
Coupler Port State	Blocking
Status	Redundancy lost. Control failure.

N-Link Partner Information	
State	Unknown
MAC	00:07:affe:afc0
Coupler Port State	Unknown
Status	Unknown

N-Link Partner Information	
State	Unknown
MAC	00:07:affe:c4:40
Coupler Port State	Unknown
Status	Unknown

## N-Link – Status, Continued...

Below is an example of N-Link Status from an N-Link Master and Slave where the Partner link is broken:

### N-Link Status View

State	Master
Control Port	TX3
Partner Port	(None)
Coupler Port	TX4
Coupler Port State	Forwarding
Status	Partner port is not know.

### N-Link Status View

State	Slave
Control Port	TX3
Partner Port	(None)
Coupler Port	TX4
Coupler Port State	Blocking
Status	Partner port is not know.

N-Link Partner Information	
State	Slave
MAC	00:07:affe:af:c0
Coupler Port State	Blocking
Status	Partner port is not know.

N-Link Partner Information	
State	Master
MAC	00:07:affe:c4:40
Coupler Port State	Forwarding
Status	Partner port is not know.

## CIP – Configuration

The Configuration tab under the CIP category will display basic variables for CIP, and the status:

**Cip Status:**

Enables or Disables CIP on the Switch. Default: Enabled.

**Multicast RPI:**

The minimum Requested Packet Interval for Class 1 (multicast) connections, in milliseconds. Requests for less than this value will be rejected. Default = 1 second.

**Unicast RPI:**

The minimum Requested Packet Interval for Class 3 (unicast) connections, in milliseconds. Requests for less than this value will be rejected. Default = 1 second.

The screenshot shows a web interface titled "CIP Configuration View". It contains a table with three rows: "CIP Status" with value "Enabled", "Multicast RPI" with value "1000 (ms)", and "Unicast RPI" with value "1000 (ms)". Below the table are two buttons: "Modify" and "Refresh".

CIP Configuration View	
CIP Status	Enabled
Multicast RPI	1000 (ms)
Unicast RPI	1000 (ms)

Modify Refresh

Following the Modify button on the above example, the administrator can modify the variables. Additionally, you may Disable or Enable CIP altogether.

The screenshot shows a web interface titled "Modify CIP Configuration". It contains a form with three rows: "CIP Status" with a dropdown menu showing "Enabled", "Multicast RPI" with a text input field containing "1000" and "(ms)", and "Unicast RPI" with a text input field containing "1000" and "(ms)". Below the form are two buttons: "Update" and "Cancel".

Modify CIP Configuration	
CIP Status	Enabled ▼
Multicast RPI	1000 (ms)
Unicast RPI	1000 (ms)

Update Cancel

## CIP – Status

The Status tab under the CIP category will display the CIP status.

The following switch status and partner status information will be shown:

Identity Information:

<b>Product Name:</b>	Switch Model Number.
<b>Vendor:</b>	This is N-Tron's ODVA Ethernet/IP Vendor ID (1006).
<b>Device Type:</b>	The ODVA Device Type is Communications Adapter (= 0x0C hex).
<b>Major Revision:</b>	The Major Revision of the CIP implementation.
<b>Minor Revision:</b>	The Minor Revision of the CIP implementation.
<b>Serial Number (hex):</b>	CIP Serial number, unique across all N-Tron CIP devices. This is the last 4 octets of the base switch MAC.

Connection Information:

<b>Number of Multicast Connections:</b>	Current number of CIP Ethernet/IP class 1 (multicast) connections.
<b>Number of Unicast Connections:</b>	Current number of CIP Ethernet/IP class 3 (unicast) connections.

### CIP Status View

CIP Status Enabled

Identity Information	
Product Name	N-TRON 708M12
Vendor	1006 (N-TRON)
Device Type	0x0C (hex) (Communications Adapter)
Major Revision	1
Minor Revision	2
Serial Number	0xAFFBE400 (hex)

Connection Information	
Number of Multicast Connections	0
Number of Unicast Connections	0

Refresh

# Firmware/Config – TFTP

The TFTP tab under the Firmware/Config category gives the administrator the ability to upload or download a config file for a 700 Series switch. This allows administrators to backup their configurations to a server offsite in case they need to reload their custom configurations at a later time. Administrators are also given the ability to flash the switch allowing them to update the firmware in the field without losing their current configurations and without having to send the unit back to N-Tron for updates in the future. It is important not to cycle power on the switch or interrupt the data connection between the TFTP server and the switch while you are flashing or uploading/downloading a config file. The switch will not stop working if this does occur, but the administrator will have to retransfer the file. Also, an XML file can be downloaded to a switch to achieve some switch configurations. XML settings cover a subset of the settings available through the web browser. Reference *Appendix A. XML Settings File Example* for the complete set of configurations that can be done using XML Settings Download.

TFTP - Firmware/Config

Server IP Address	192.168.1.12
File Name	Image
Transfer Type	Download image from server

ActionCancel

TFTP - Firmware/Config

Server IP Address	192.168.2.118
File Name	700Series.Image
Transfer Type	Download image from server   Upload saved config to server   Download config from server   Download XML config from server   Download image from server   Download boot image from server

Download Image

Transferring "Image" from server (192.168.1.12).

Image transferred successfully.

Resetting switch (192.168.1.228)

Please wait...

## Firmware/Config – TFTP, Continued...

In some cases the administrator may choose to upload or down load only certain configuration settings or to retain his current network settings. These choices are available as below. For more detail on the choices, reference '*Help – Firmware/Config*' in this user manual or from the actual switch.

### TFTP - Firmware/Config

Server IP Address	192.168.2.118
File Name	700Series.Config
Transfer Type	Upload saved config to server

Configuration Items To Upload To Server

- ☒ Main Configuration Settings
- ☒ SNMP Configuration Settings
- ☒ DHCP Server Configuration Settings
- ☒ MAC Security Configuration Settings
- ☐ Manually Configured Only

### TFTP - Firmware/Config


Server IP Address	192.168.2.118
File Name	700Series.Config
Transfer Type	Download config from server

Configuration Items To Download From Server

- ☒ Main Configuration Settings
  - ☒ Keep Current IP, Gateway and Subnet Mask
- ☐ SNMP Configuration Settings
- ☐ DHCP Server Configuration Settings
- ☒ MAC Security Configuration Settings
  - ☒ Manually Configured Only


## Support – Web Site and E-mail

If at any point in time you get confused or would like additional support directly from N-Tron, you may visit N-Tron's web site, or e-mail N-Tron directly with the links provided for more information.

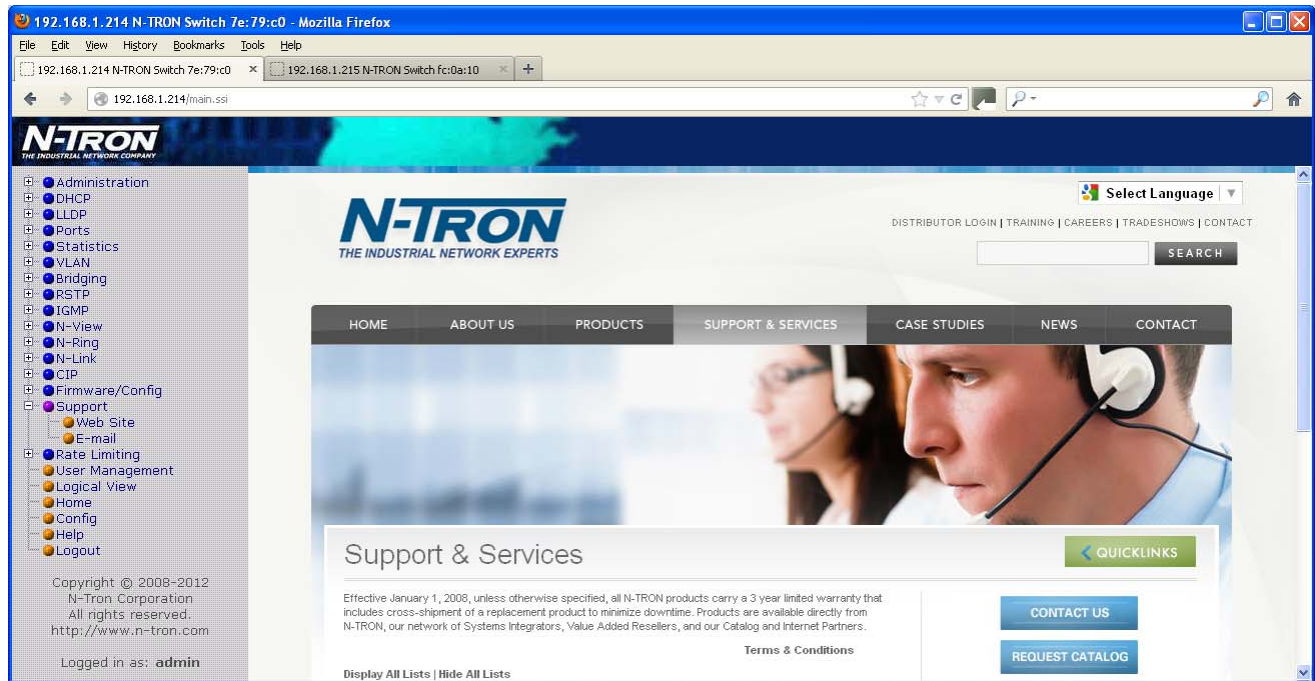

## Rate Limiting Configuration

From the left hand navigation, one can choose Broadcast or Multicast Rate Limiting. These are ingress filters.



The Broadcast Rate Limit View displays all the ports in the 700Series unit and lists the percentage pass rate for each port. The factory defaults for 10/100 ports are 3% and for gigabit ports are 1%. A Modify button is provided to change these fields.

<b>Broadcast Rate Limit View</b>	
Port Name	Broadcast Pass Rate [%]
TX1	3
TX2	3
TX3	3
TX4	3
TX5	3
TX6	3
TX7	3
TX8	3
TX9	3
TX10	3
TX11	3
TX12	3
TX13	3
TX14	3
TX15	3
TX16	3
Modify Refresh	

Following the Modify button on the above example, the administrator can modify the percentage for each and every port independently. A selection is provided for all ports to be set at once when that is more convenient.

### **Broadcast Rate Limit Configuration**

Port Name	TX1
Broadcast Pass Rate [%]	3

### **Broadcast Rate Limit Configuration**

Port Name	TX1
Broadcast Pass Rate [%]	3

- TX1
- TX2
- TX3
- TX4
- TX5
- TX6
- TX7
- TX8
- TX9
- TX10
- TX11
- TX12
- TX13
- TX14
- TX15
- TX16
- All

The Multicast Rate Limit View displays all the ports in the 700 Series unit and lists the percentage pass rate for each port. A Modify button is provided to change these fields. The factory default for multicast rate limiting is 100% pass rate on all ports.

**Multicast Rate Limit View**

Port Name	Multicast Pass Rate [%]
TX1	100
TX2	100
TX3	100
TX4	100
TX5	100
TX6	100
TX7	100
TX8	100
TX9	100
TX10	100
TX11	100
TX12	100
TX13	100
TX14	100
TX15	100
TX16	100

Modify

Refresh

Following the Modify button on the above example, the administrator can modify the percentage for each and every port independently. A selection is provided for all ports to be set at once when that is more convenient.

**Multicast Rate Limit Configuration**

Port Name

TX1

Multicast Pass Rate [%]

100

Update

Cancel

## Multicast Rate Limit Configuration

Port Name
TX1   TX1  TX2  TX3  TX4  TX5  TX6  TX7  TX8  TX9  TX10  TX11  TX12  TX13  TX14  TX15  TX16  All
Multicast Pass Rate [%]

Update

Cancel

# User Management – Adding Users

The User Management link will display a list of all the users who have access to the management features of the switch and their access permissions.

Authorized Users

No.	User Name	Access Permission
<a href="#">01</a>	admin	admin

Add

Remove

Refresh

Following the Add button on the above example, the administrator can add another user and assign the user a username, a password, and the user’s permissions (user/administrator).

Add New User

User Name	user
Password	•••••
Access Permission	User

Add

Cancel

A page should display after the administrator clicks the Add button indicating that the user was successfully added.

Authorized Users

No.	User Name	Access Permission
<a href="#">01</a>	admin	admin
<a href="#">02</a>	user	user

Add

Remove

Refresh

# User Management – Removing Users

In order to remove a user, simply click on the Remove button at the bottom of the page.

### Authorized Users

No.	User Name	Access Permission
<a href="#">01</a>	admin	admin
<a href="#">02</a>	user	user

AddRemoveRefresh

Following the Remove button on the above example, the administrator can remove a user by entering in the user’s name and clicking the Remove button.

### Remove An Existing User

User Name

user

RemoveCancel

A page should follow indicating that the user was successfully removed from the list.

### Authorized Users

No.	User Name	Access Permission
<a href="#">01</a>	admin	admin


AddRemoveRefresh

**Note:** There are a maximum number of 5 users per switch. User permissions have the right to view switch configurations and to view current port settings, but cannot make any changes to these settings. Admin permissions have the right to change and view any switch configuration and to change and view any current port settings.


## LogicalView

The 708M12 and 716M12 Web Management offers a logical view of the switch. Here a user or administrator can see a graphical depiction of the switch. Ports that are linked will appear in green, while ports that are not linked will appear in black. The example directly below shows ports 2, 4, 7, and 8 linked. The other ports are currently in the down state (not being used). The NTCD-M12 connection at the lower left will be green as below only if a configuration device is present.

### N-Tron 708M12

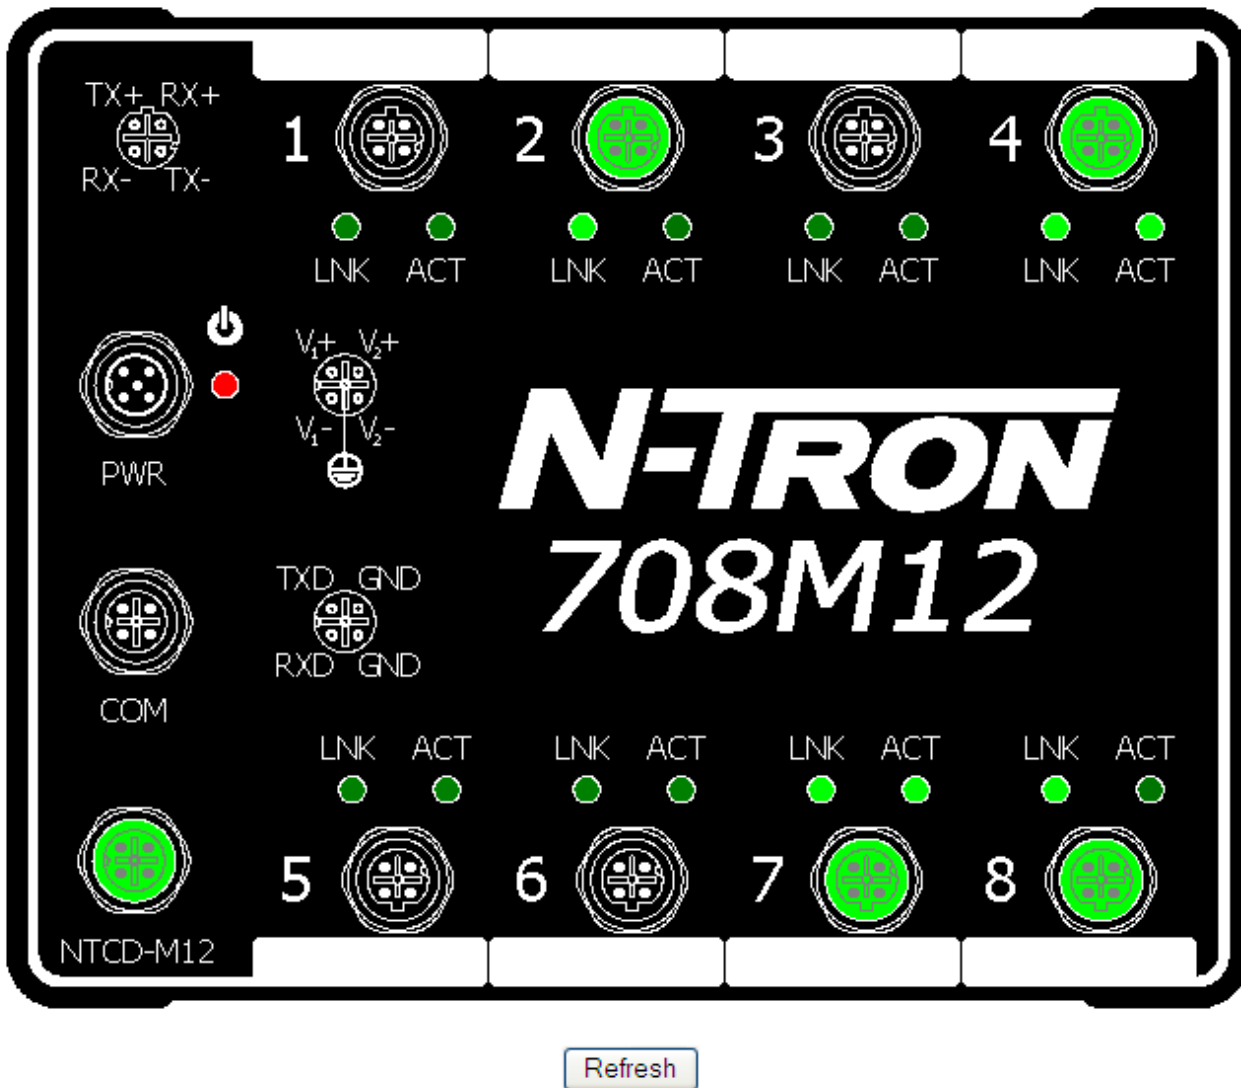

## N-TRON 716M12

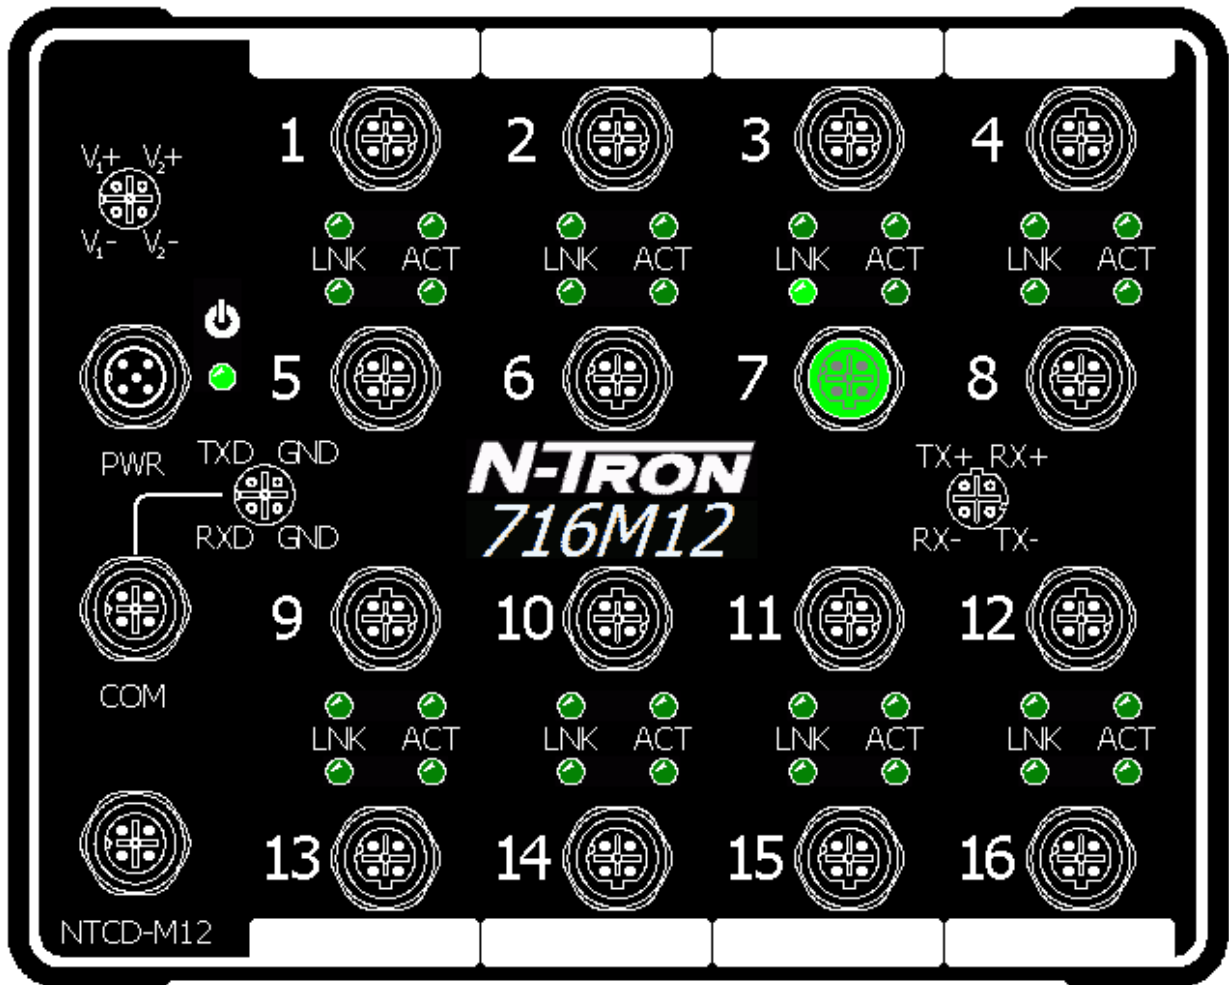

## Configuration – Save or Reset

The Configuration section of web management gives an administrator the ability to save a running configuration into the NVRAM. This step is needed in order for the switch to remember any changes after a power cycle.

The “Save” button will save all current changes to the configuration for use after the next power cycle.

**Note: The current configuration will also be saved to the configuration device when connected.** This page reveals whether the configuration device is installed or not.

The “Reset” button will discard all unsaved changes, reset the switch and load the most recently saved configuration settings. **Note: Upon restart, if a configured configuration device is connected, the switch will load the configured settings from it and save them into NVRAM.**

The “Factory” button will reload N-Tron’s factory default configuration settings. Doing so will reconfigure the 700 Series switch to factory defaults. In many cases it is desirable to restore factory defaults but retain the IP address, subnet mask, and gateway address settings as well as user names and passwords.

Checkboxes are provided to select the desired behavior. **Note: The factory default configuration settings will also be saved to the configuration device when connected.**

### Configuration Save Or Reset

Configuration device is connected.

Click "Save" button to save changes to the configuration.

Save

---

Click "Reset" button to reset the switch and load the most recently saved configuration.

Reset


---

Click "Factory" button to reset switch to factory defaults.

- ☒ Keep current IP address, subnet mask, and gateway.
- ☒ Keep current user names and passwords.
- ☒ Keep currently stored SNMP settings.
- ☒ Keep currently stored DHCP Server settings.
- ☒ Keep currently stored MAC Security settings.

Factory

# Help – Overview

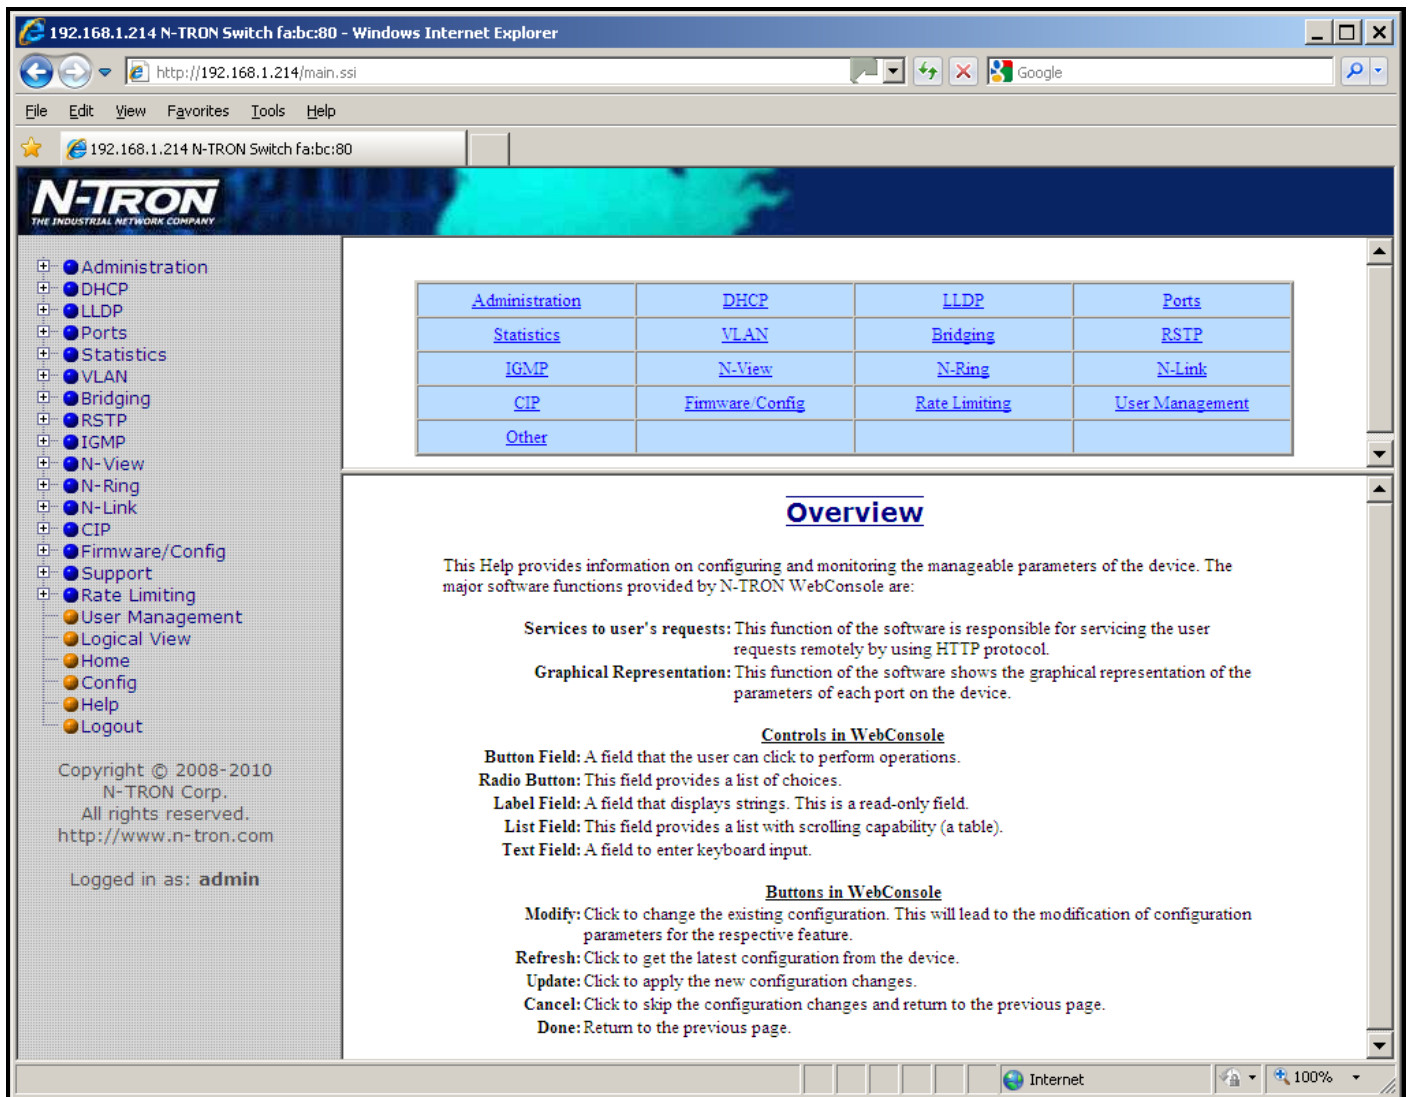

When the Help link is clicked on, you will see the Overview page that will have some basic definitions and more specific choices at the top of the screen. Although this page is not as detailed as the manual, it gives you a basic feel for different features the 708M12 or 716M12 offer.

## Help – Administration

The screenshot shows a web browser window titled "192.168.1.214 N-TRON Switch fa:bc:80 - Windows Internet Explorer". The address bar shows "http://192.168.1.214/main.ssi". The N-TRON logo is at the top left. A left sidebar contains a tree view of navigation links: Administration (selected), DHCP, LLDP, Ports, Statistics, VLAN, Bridging, RSTP, IGMP, N-View, N-Ring, N-Link, CIP, Firmware/Config, Support, Rate Limiting, User Management, Logical View, Home, Config, Help, and Logout. Below the sidebar, it says "Copyright © 2008-2010 N-TRON Corp. All rights reserved. http://www.n-tron.com" and "Logged in as: admin". The main content area has a top navigation bar with links: Administration, DHCP, LLDP, Ports, Statistics, VLAN, Bridging, RSTP, IGMP, N-View, N-Ring, N-Link, CIP, Firmware Config, Rate Limiting, and User Management. Below this, the "Administration" section is titled, and it states: "Administration group is divided into three categories: 1. System 2. SNMP 3. Fault". Under the "System" category, there is a table of configuration options:

<u>System</u>	
<b>IP Configuration:</b>	Determines the method used to obtain an IP address, Subnet Mask, and Gateway address. When Static is selected, the statically configured values are used. When DHCP is selected, DHCP protocols are used to obtain these values.
<b>Client ID:</b>	This option is used by DHCP clients to specify their unique identifier. DHCP servers use this value to index their database of address bindings. This value is expected to be unique for all clients in an administrative domain. The identifier may be the MAC address, switch name, or entered as a text string or hex characters. (Only shown in DHCP Mode)
<b>IP Address:</b>	Contains the current IP Address of the device.
<b>Subnet Mask:</b>	Contains the current Subnet Mask of the device.
<b>Gateway:</b>	Contains the current Gateway of the device.
<b>Fallback IP Address:</b>	Contains the configured Fallback IP Address of the device. (Only shown in DHCP Mode)
<b>Fallback Subnet Mask:</b>	Contains the configured Fallback Subnet Mask of the device. (Only shown in DHCP Mode)
<b>Fallback Gateway:</b>	Contains the configured Fallback Gateway of the device. (Only shown in DHCP Mode)
<b>MAC Address:</b>	MAC Address of the device.
<b>System Up Time:</b>	This parameter represents the total time elapsed since the switch was turned ON or RESET.
<b>Name:</b>	Contains the name assigned to the device, which allows alphanumeric and special

Following the Administration link on the help page, the administrator or user can see some information regarding the configuration options in the Administration category on the left side of the web management.

# Help – DHCP

192.168.1.214 N-TRON Switch fa:bc:80 - Windows Internet Explorer

http://192.168.1.214/main.ssi

File Edit View Favorites Tools Help

192.168.1.214 N-TRON Switch fa:bc:80

**N-TRON**  
THE INDUSTRIAL NETWORK COMPANY

- Administration
- DHCP
- LLDP
- Ports
- Statistics
- VLAN
- Bridging
- RSTP
- IGMP
- N-View
- N-Ring
- N-Link
- CIP
- Firmware/Config
- Support
- Rate Limiting
- User Management
- Logical View
- Home
- Config
- Help
- Logout

Copyright © 2008-2010  
N-TRON Corp.  
All rights reserved.  
http://www.n-tron.com

Logged in as: admin

<a href="#">Administration</a>	<a href="#">DHCP</a>	<a href="#">LLDP</a>	<a href="#">Ports</a>
<a href="#">Statistics</a>	<a href="#">VLAN</a>	<a href="#">Bridging</a>	<a href="#">RSTP</a>
<a href="#">IGMP</a>	<a href="#">N-View</a>	<a href="#">N-Ring</a>	<a href="#">N-Link</a>
<a href="#">CIP</a>	<a href="#">Firmware Config</a>	<a href="#">Rate Limiting</a>	<a href="#">User Management</a>
<a href="#">Other</a>			

## DHCP - Dynamic Host Configuration Protocol

DHCP group is divided into two categories:

1. Server
2. Relay & Local IP

### Server - Setup Profiles

<b>Server Enabled:</b>	Indicates whether the DHCP server is active. The default is Disabled.
<b>Allow Broadcast:</b>	Indicates whether the DHCP server will process broadcast messages. Typically, client requests are broadcast and relay agent requests are unicast. When enabled, the server will respond to broadcast requests. When disabled, the server will ignore broadcast requests. The default is Enabled.
<b>Delay Broadcast (Ms):</b>	The amount of time (in milliseconds) that the DHCP server will delay the processing of a broadcast message. This setting is used when clients and relay agents are on the same subnet and/or VLAN. A delay provides the opportunity for relay agent requests to be honored before client requests. This setting only applies when Allow Broadcast is Enabled. The range is 0-2500 and the default is 500.
<b>Server ID:</b>	Descriptive name of the DHCP server. The name must be unique. The default is the switch name.

### Network Profiles

A network profile contains vital network configuration options for potential clients. At least one network profile is necessary to create an IP map. Also, a default network profile named "DEFAULT" exists and can be used to initialize certain fields in other network profiles to default values. The Delete button removes the corresponding network profile along with all IP maps and bindings associated with the network profile.

<b>Network Profile Name:</b>	Descriptive name of the network profile. The name must be unique and is required.
<b>Address Pool Start:</b>	Starting IP address of a pool of addresses for the network profile. IP addresses within the address pool can be used in any combination of dynamic and static IP assignments. There can only be one address pool per subnet; therefore, it is recommended to use the full range of addresses. For example, an address pool range of 192.168.1.1 to 192.168.1.254 will result in a subnet address of 192.168.1.0 and a subnet mask of 255.255.255.0.
<b>Address Pool End:</b>	Ending IP address of a pool of addresses for the network profile. IP addresses within the address pool can be used in any combination of dynamic and static IP assignments. There can only be one address pool per subnet; therefore, it is

Following the DHCP link on the help page, the administrator or user can see some information regarding the configuration options under the DHCP categories on the left side of the web management.

# Help – LLDP

The screenshot shows a web browser window titled "192.168.1.214 N-TRON Switch fa:bc:80 - Windows Internet Explorer". The address bar shows "http://192.168.1.214/main.ssi". The page features a sidebar menu on the left with various configuration options, including Administration, DHCP, LLDP, Ports, Statistics, VLAN, Bridging, RSTP, IGMP, N-View, N-Ring, N-Link, CIP, Firmware/Config, Support, Rate Limiting, User Management, Logical View, Home, Config, Help, and Logout. The main content area displays a table of links for Administration, DHCP, LLDP, and Ports. The LLDP link is highlighted, and the page title is "LLDP - Link Layer Discovery Protocol". The text states "LLDP is divided into four categories: 1. Configuration 2. Ports 3. Status 4. Statistics". The Configuration section includes a table with settings like Mode, Transmit Interval, Transmit Hold Multiplier, Re-Initialization Delay, and Notification Interval. The Ports section includes a table with settings like Port Name, Transmit, Receive, Allow Management Data, and Allow Notification. The Status section includes a paragraph about LLDP discovery and a table with settings like Port Name and Neighbor MAC.

192.168.1.214 N-TRON Switch fa:bc:80 - Windows Internet Explorer

http://192.168.1.214/main.ssi

File Edit View Favorites Tools Help

192.168.1.214 N-TRON Switch fa:bc:80

**N-TRON**  
THE INDUSTRIAL NETWORK COMPANY

- Administration
- DHCP
- LLDP
- Ports
- Statistics
- VLAN
- Bridging
- RSTP
- IGMP
- N-View
- N-Ring
- N-Link
- CIP
- Firmware/Config
- Support
- Rate Limiting
- User Management
- Logical View
- Home
- Config
- Help
- Logout

Copyright © 2008-2010  
N-TRON Corp.  
All rights reserved.  
http://www.n-tron.com

Logged in as: admin

Administration	DHCP	LLDP	Ports
Statistics	VLAN	Bridging	RSTP
IGMP	N-View	N-Ring	N-Link
CIP	Firmware Config	Rate Limiting	User Management
Other			

## LLDP - Link Layer Discovery Protocol

LLDP is divided into four categories:  
1. Configuration 2. Ports 3. Status 4. Statistics

### Configuration

Mode:	Enables or disables LLDP on the switch. The default is Disabled.
Transmit Interval:	Specifies the interval at which LLDP frames are transmitted. The default is 30 seconds.
Transmit Hold Multiplier:	Specifies a multiplier on the Transmit Interval when calculating a Time-to-Live value. The default is 4.
Re-Initialization Delay:	Specifies the minimum time an LLDP port will wait before re-initializing after its setting has changed from disabled to Tx-Only or Tx/Rx. This prevents excessive notifications when LLDP Port settings are toggled. The default is 2 seconds.
Notification Interval:	Specifies the interval between successive notifications generated by the switch. If a port sends out a notification and another port tries to send out a notification, the subsequent notification will not be sent until the interval expires. The default is 5 seconds.

### Ports

Port Name:	The descriptive name of the port.
Transmit:	Enables or disables LLDP transmission on the switch.
Receive:	Enables or disables receipt of LLDP frames from neighbor switches.
Allow Management Data:	Allows the transmission of management type information. Example: IP address of switch.
Allow Notification:	Allows a notification to be transmitted when local or remote data changes.

### Status

The Status View shows the results of LLDP discovery. The LLDP Ethernet frames received from neighboring ports are composed of collections of data units called TLVs. Each TLV contains a defined type of information such as the Chassis ID described below, which contains the MAC address of the device sending the frame. The maximum number of neighbors displayed per port is four.

Port Name:	The descriptive name of the port on which the neighbor information was received.
Neighbor MAC:	MAC address of neighbor switch. Corresponds to the LLDP Chassis ID TLV.

Following the LLDP link on the help page, the administrator or user can see some information regarding the configuration options in the LLDP category on the left side of the web management.

# Help – Ports

The screenshot shows a web browser window titled "192.168.1.214 N-TRON Switch fa:bc:80 - Windows Internet Explorer". The address bar shows "http://192.168.1.214/main.ssi". The browser's menu bar includes File, Edit, View, Favorites, Tools, and Help. The address bar also shows a search icon and a Google logo.

The main content area displays the N-TRON logo and a navigation menu on the left. The menu includes links for Administration, DHCP, LLDP, Ports, Statistics, VLAN, Bridging, RSTP, IGMP, N-View, N-Ring, N-Link, CIP, Firmware/Config, Support, Rate Limiting, User Management, Logical View, Home, Config, Help, and Logout. The "Ports" link is highlighted.

The main content area shows a table of links for various configuration options:

<a href="#">Administration</a>	<a href="#">DHCP</a>	<a href="#">LLDP</a>	<a href="#">Ports</a>
<a href="#">Statistics</a>	<a href="#">VLAN</a>	<a href="#">Bridging</a>	<a href="#">RSTP</a>
<a href="#">IGMP</a>	<a href="#">N-View</a>	<a href="#">N-Ring</a>	<a href="#">N-Link</a>
<a href="#">CIP</a>	<a href="#">Firmware Config</a>	<a href="#">Rate Limiting</a>	<a href="#">User Management</a>
<a href="#">Other</a>			

Below the table, the "Ports" section is titled "Ports" and states: "Ports group is divided into five categories: 1. Configuration 2. MAC Security 3. Mirroring 4. Trunking 5. QOS".

The "Configuration" section is titled "Configuration" and contains a table of port configuration options:

<b>Port No:</b>	The number of the port.
<b>Port Name:</b>	The descriptive name of the port.
<b>Admin Status:</b>	This configurable field displays the existing status of the port whether it is Enabled/Disabled.
<b>Link Status:</b>	Current link state.
<b>Auto Nego:</b>	This configurable field displays the current auto-negotiation state whether it is Enabled/Disabled.
<b>Port Speed:</b>	This configurable field displays the speed of each port 10/100 Mbps.
<b>Duplex Mode:</b>	This configurable field displays the existing mode of the port whether it is Full Duplex/Half Duplex.
<b>Flow Control:</b>	This configurable field displays the existing flow control status of each port. When enabled, the individual port supports half-duplex back pressure and full-duplex flow control. The default is Disabled.
<b>Port State:</b>	The current status of a port. It may contain: Disabled, Discarding, Learning, Forwarding, and Blocking.
<b>PVID:</b>	This configurable field displays the existing port VLAN ID setting. This is the VLAN ID assigned to ingress untagged frames, or all ingress frames if "Replace VID with Default Port VID" is enabled. The allowable range is 1-4094.
<b>Usage Alarm Low [%]:</b>	The bandwidth utilization percentage below which a fault will be triggered if enabled. For half duplex the bandwidth utilization percentage is the sum of both RX and TX bandwidth utilization, and for full duplex this is the higher of TX or RX bandwidth utilization. See Port Utilization View and Port Usage Fault on Fault Configuration View.
<b>Usage Alarm High [%]:</b>	The bandwidth utilization percentage above which a fault will be triggered if enabled. For half duplex the bandwidth utilization percentage is the sum of both RX and TX bandwidth utilization, and for full duplex this is the higher of TX or RX bandwidth utilization. See Port Utilization View and Port Usage Fault on Fault Configuration View.

The bottom of the page shows a status bar with "Internet" and a 100% zoom level.

Following the Ports link on the help page, the administrator or user can see some information regarding the configuration options in the Ports category on the left side of the web management.

## Help – Statistics

The screenshot shows a web browser window titled "192.168.1.214 N-TRON Switch fa:bc:80 - Windows Internet Explorer". The address bar shows "http://192.168.1.214/main.ssi". The browser's menu bar includes File, Edit, View, Favorites, Tools, and Help. The address bar also shows a search bar with "Google".

The main content area displays the N-TRON logo and a navigation menu on the left. The menu includes links for Administration, DHCP, LLDP, Ports, Statistics, VLAN, Bridging, RSTP, IGMP, N-View, N-Ring, N-Link, CIP, Firmware/Config, Support, Rate Limiting, User Management, Logical View, Home, Config, Help, and Logout. The "Statistics" link is highlighted.

The main content area shows a table of links for various configuration options:

<a href="#">Administration</a>	<a href="#">DHCP</a>	<a href="#">LLDP</a>	<a href="#">Ports</a>
<a href="#">Statistics</a>	<a href="#">VLAN</a>	<a href="#">Bridging</a>	<a href="#">RSTP</a>
<a href="#">IGMP</a>	<a href="#">N-View</a>	<a href="#">N-Ring</a>	<a href="#">N-Link</a>
<a href="#">CIP</a>	<a href="#">Firmware Config</a>	<a href="#">Rate Limiting</a>	<a href="#">User Management</a>
<a href="#">Other</a>			

Below the table, the "Statistics" section is displayed. It states: "Statistics group is divided into two categories: 1. Ports Statistics 2. Ports Utilization".

**Ports Statistics**

Displays the MIB counters for the selected port, specified by the Port pull-down menu. The Clear button will reset all counters for the selected port. The Clear All Ports button will reset all counters for all ports, including the selected port.

**Ports Utilization**

Shows a bandwidth percentage graph of all the ports. The graph is scaled based on the Scale pull-down menu selection.

The footer of the page shows "Copyright © 2008-2010 N-TRON Corp. All rights reserved. http://www.n-tron.com" and "Logged in as: admin".

Following the Statistics link on the help page, the administrator or user can see some information regarding the configuration options in the Statistics category on the left side of the web management.

# Help – VLAN

The screenshot shows a web browser window titled "192.168.1.214 N-TRON Switch fa:bc:80 - Windows Internet Explorer". The address bar shows "http://192.168.1.214/main.ssi". The page features the N-TRON logo and a navigation menu on the left with options like Administration, DHCP, LLDP, Ports, Statistics, VLAN, Bridging, RSTP, IGMP, N-View, N-Ring, N-Link, CIP, Firmware/Config, Support, Rate Limiting, User Management, Logical View, Home, Config, Help, and Logout. The main content area displays a table of links for various functions, including Administration, DHCP, LLDP, Ports, Statistics, VLAN, Bridging, RSTP, IGMP, N-View, N-Ring, N-Link, CIP, Firmware Config, Rate Limiting, and User Management. Below this, the "VLAN - Virtual Local Area Network" section is shown, containing configuration options such as Replace VID with Default Port VID, Perform Ingress Filtering, Discard Non-Tagged for Ports, Group Configuration, VLAN ID, VLAN Name, Allow Management, Change PVID of Member Ports, Port No, Port Name, Group Member, and Untag on Egress.

VLAN - Virtual Local Area Network			
<b>Configuration</b>			
Replace VID with Default Port VID:	Specifies whether or not to replace the incoming VID tag with the port's designated VID.		
Perform Ingress Filtering:	Specifies whether or not to filter out ingress frames when a VID violation is detected.		
Discard Non-Tagged for Ports:	Specifies whether or not non-tagged ingress frames are dropped by the selected ports.		
<b>Group Configuration</b>			
VLAN ID:	This field displays the VLAN ID. The range should be 1-4094.		
VLAN Name:	This configurable field displays the name of the VLAN, which accepts alphanumeric and special characters '=', '_', '.', and ' ' only.		
Allow Management:	Specifies whether or not all ports in this VLAN are management ports.		
Change PVID of Member Ports:	Specifies whether or not the PVID of the member ports is set to this VLAN ID.		
Port No:	The number of the port.		
Port Name:	The descriptive name of the port.		
Group Member:	Specifies whether or not the port is included in the group.		
Untag on Egress:	Specifies whether or not egress frames are tagged by the designated port.		

Following the VLAN link on the help page, the administrator or user can see some information regarding the configuration options in the VLAN category on the left side of the web management.

# Help – Bridging

The screenshot shows a web browser window titled "192.168.1.214 N-TRON Switch fa:bc:80 - Windows Internet Explorer". The address bar shows "http://192.168.1.214/main.ssi". The browser menu includes File, Edit, View, Favorites, Tools, and Help. The address bar also shows "192.168.1.214 N-TRON Switch fa:bc:80".

The N-TRON logo is visible at the top left, with the tagline "THE INDUSTRIAL NETWORK COMPANY". A sidebar on the left contains a navigation menu with the following items: Administration, DHCP, LLDP, Ports, Statistics, VLAN, Bridging, RSTP, IGMP, N-View, N-Ring, N-Link, CIP, Firmware/Config, Support, Rate Limiting, User Management, Logical View, Home, Config, Help, and Logout. The "Bridging" item is highlighted.

The main content area displays a table of links for various configuration options:

<a href="#">Administration</a>	<a href="#">DHCP</a>	<a href="#">LLDP</a>	<a href="#">Ports</a>
<a href="#">Statistics</a>	<a href="#">VLAN</a>	<a href="#">Bridging</a>	<a href="#">RSTP</a>
<a href="#">IGMP</a>	<a href="#">N-View</a>	<a href="#">N-Ring</a>	<a href="#">N-Link</a>
<a href="#">CIP</a>	<a href="#">Firmware Config</a>	<a href="#">Rate Limiting</a>	<a href="#">User Management</a>
<a href="#">Other</a>			

The "Bridging" section is titled "Bridging" and states: "Bridging group is divided into four categories: 1. Aging Time 2. Unicast Addresses 3. Multicast Addresses 4. Show MAC by Port".

The "Aging Time" section is titled "Aging Time" and states: "This configurable field displays the aging time for dynamically learned MAC addresses. The inactive members will be removed from the Hardware Address Entry Table after this time period. The aging time range should be 5-1000000 seconds. The default aging time is 20 seconds."

The "Unicast Addresses" section is titled "Unicast Addresses" and states: "This page shows the existing static Unicast MAC Addresses". It includes a table with the following rows:

<b>MAC Address:</b>	The static MAC address to be configured to the device.
<b>Port:</b>	Port which the static Unicast MAC address is to be configured.
<b>VLAN ID:</b>	VLAN in which the MAC address is assigned. The range is 1-4094.

The "Multicast Addresses" section is titled "Multicast Addresses" and states: "This page shows the existing static Multicast Group Addresses". It includes a table with the following rows:

<b>Multicast Address:</b>	The static Multicast group address to be configured to the device.
<b>Port List:</b>	List of ports associated with this Multicast group address.
<b>VLAN ID:</b>	VLAN in which the Multicast group address is assigned. The range is 1-4094.

The "Show MAC by Port" section is titled "Show MAC by Port" and states: "This N-Discovery feature shows the MAC address of a device connected to each switch port and the IP Address associated with that MAC." It includes a table with the following rows:

<b>Active IP Probe:</b>	This field is configurable using the Modify button, and also displays the existing Enabled or Disabled status of this feature. The default is Disabled. When disabled the switch generates no Ethernet traffic, but can still present some information
-------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

The footer of the page shows "Copyright © 2008-2010 N-TRON Corp. All rights reserved. http://www.n-tron.com" and "Logged in as: admin".

Following the Bridging link on the help page, the administrator or user can see some information regarding the configuration options in the Bridging category on the left side of the web management.

# Help – RSTP

192.168.1.214 N-TRON Switch fa:bc:80 - Windows Internet Explorer

http://192.168.1.214/main.ssi

File Edit View Favorites Tools Help

192.168.1.214 N-TRON Switch fa:bc:80

**N-TRON**  
THE INDUSTRIAL NETWORK COMPANY

- Administration
- DHCP
- LLDP
- Ports
- Statistics
- VLAN
- Bridging
- RSTP
- IGMP
- N-View
- N-Ring
- N-Link
- CIP
- Firmware/Config
- Support
- Rate Limiting
- User Management
- Logical View
- Home
- Config
- Help
- Logout

Copyright © 2008-2010  
N-TRON Corp.  
All rights reserved.  
http://www.n-tron.com

Logged in as: admin

<a href="#">Administration</a>	<a href="#">DHCP</a>	<a href="#">LLDP</a>	<a href="#">Ports</a>
<a href="#">Statistics</a>	<a href="#">VLAN</a>	<a href="#">Bridging</a>	<a href="#">RSTP</a>
<a href="#">IGMP</a>	<a href="#">N-View</a>	<a href="#">N-Ring</a>	<a href="#">N-Link</a>
<a href="#">CIP</a>	<a href="#">Firmware Config</a>	<a href="#">Rate Limiting</a>	<a href="#">User Management</a>
<a href="#">Other</a>			

## RSTP - Rapid Spanning Tree Protocol

The VLAN pull-down menu is used to select which VLAN to configure.

Note: In order to accommodate legacy devices, use these values for RSTP: Auto Edge Disabled, Hello Time 2, Forward Delay 15, and Max Age 20.

### RSTP Root Bridge Configuration

<b>Root Priority:</b>	Priority of the root bridge.
<b>Designated Root:</b>	The unique Bridge Identifier of the bridge recorded as the root in the Root Identifier parameter of Configuration BPDUs transmitted by the Designated Bridge for the LAN.
<b>Path Cost:</b>	The cost of the path to the root offered by the Designated Port on the LAN.
<b>Port:</b>	The Port Identifier of the Bridge Port believed to be the Designated Port for the LAN.
<b>Max Age:</b>	The maximum age of received protocol information before it is discarded.
<b>Hello Time:</b>	The time interval between the transmission of Configuration BPDUs by a bridge that is attempting to become the Root or is the Root.
<b>Forward Delay:</b>	The time spent in the Listening State while moving from the Blocking State to the Learning State.

### This Bridge Configuration

<b>Hello Time:</b>	This configurable field shows the value of the Hello Time parameter when the bridge is the Root or is attempting to become the Root. The range is generally 1-10, but consult the user manual for other constraints. The default value is 1 second.
<b>Forward Delay:</b>	The time spent in the Listening State while moving from the Blocking State to the Learning State. The range is generally 4-30, but consult the user manual for other constraints. The default value is 13 seconds.
<b>Max Age:</b>	The value of the Max Age parameter when the bridge is the Root or is attempting to become the Root. The range is generally 6-40, but consult the user manual for other constraints. The default value is 16 seconds.

Following the RSTP link on the help page, the administrator or user can see some information regarding the configuration options in the RSTP category on the left side of the web management.

# Help – IGMP

The screenshot shows a web browser window titled "192.168.1.214 N-TRON Switch fa:bc:80 - Windows Internet Explorer". The address bar shows "http://192.168.1.214/main.ssi". The page features a sidebar menu on the left with various configuration options, including Administration, DHCP, LLDP, Ports, Statistics, VLAN, Bridging, RSTP, IGMP, N-View, N-Ring, N-Link, CIP, Firmware/Config, Support, Rate Limiting, User Management, Logical View, Home, Config, Help, and Logout. The main content area displays the "IGMP - Internet Group Management Protocol" help page. At the top, there is a navigation table with links to Administration, DHCP, LLDP, Ports, Statistics, VLAN, Bridging, RSTP, IGMP, N-View, N-Ring, N-Link, CIP, Firmware Config, Rate Limiting, and User Management. The IGMP page content includes a description of the IGMP group, a list of four categories (Configuration, Show Groups, Show Routers, RFilter Ports), and detailed configuration options for each category. The Configuration section includes fields for IGMP Status, Query Mode, Router Mode, Manual Router Ports, N-Ring Router Ports, and N-Link Router Ports. The Show Groups section includes fields for Total Number of Active IP Group Memberships, Group IP, Port Name, and VLAN ID. The Show Routers section includes fields for Router IP, Port Name, and VLAN ID. The RFilter Ports section includes fields for Port No, Port Name, and RFilter State.

192.168.1.214 N-TRON Switch fa:bc:80 - Windows Internet Explorer

http://192.168.1.214/main.ssi

File Edit View Favorites Tools Help

192.168.1.214 N-TRON Switch fa:bc:80

**N-TRON**  
THE INDUSTRIAL NETWORK COMPANY

- Administration
- DHCP
- LLDP
- Ports
- Statistics
- VLAN
- Bridging
- RSTP
- IGMP
- N-View
- N-Ring
- N-Link
- CIP
- Firmware/Config
- Support
- Rate Limiting
- User Management
- Logical View
- Home
- Config
- Help
- Logout

Copyright © 2008-2010  
N-TRON Corp.  
All rights reserved.  
http://www.n-tron.com

Logged in as: admin

<a href="#">Administration</a>	<a href="#">DHCP</a>	<a href="#">LLDP</a>	<a href="#">Ports</a>
<a href="#">Statistics</a>	<a href="#">VLAN</a>	<a href="#">Bridging</a>	<a href="#">RSTP</a>
<a href="#">IGMP</a>	<a href="#">N-View</a>	<a href="#">N-Ring</a>	<a href="#">N-Link</a>
<a href="#">CIP</a>	<a href="#">Firmware Config</a>	<a href="#">Rate Limiting</a>	<a href="#">User Management</a>
<a href="#">Other</a>			

## IGMP - Internet Group Management Protocol

IGMP group consists of four categories:  
1. Configuration 2. Show Groups 3. Show Routers 4. RFilter Ports

### Configuration

<b>IGMP Status:</b>	Indicates whether IGMP is enabled or disabled.
<b>Query Mode:</b>	Specifies the query mode to be used. The default is Auto. Auto - Multiple switches will ensure that only one switch is the active querier. On - This switch is always an active querier. Off - This switch never queries.
<b>Router Mode:</b>	Specifies the router mode to be used. The default is Auto. Auto - Allows for dynamically detected and manually set router ports. Manual - Allows only for manually set router ports. None - Allows no router ports.
<b>Manual Router Ports:</b>	Port or ports that are specified as router ports manually.
<b>N-Ring Router Ports:</b>	On an N-Ring Manager, the ring ports are informatively shown as router ports.
<b>N-Link Router Ports:</b>	On N-Link Master, Slave, and Coupler switches, the coupler ports are informatively shown as router ports.

### Show Groups

<b>Total Number of Active IP Group Memberships:</b>	Total Number of Active Group IP Memberships based on the dotted quad view and counting each joined port.
<b>Group IP:</b>	Dynamically created Multicast group IP address.
<b>Port Name:</b>	The descriptive name of the port.
<b>VLAN ID:</b>	VLAN in which the Group IP is assigned. The range is 1-4094.

### Show Routers

<b>Router IP:</b>	Auto-detected router IP address.
<b>Port Name:</b>	The descriptive name of the port.
<b>VLAN ID:</b>	VLAN in which the Router IP is assigned. The range is 1-4094.

### RFilter Ports

<b>Port No:</b>	The number of the port.
<b>Port Name:</b>	The descriptive name of the port.
<b>RFilter State:</b>	Status of whether RFilter is enabled or disabled for a port.

Internet 100%

Following the IGMP link on the help page, the administrator or user can see some information regarding the configuration options in the IGMP category on the left side of the web management.

## Help – N-View

The screenshot shows a web browser window titled "192.168.1.214 N-TRON Switch fa:bc:80 - Windows Internet Explorer". The address bar shows "http://192.168.1.214/main.ssi". The page features the N-TRON logo and a navigation menu on the left with items like Administration, DHCP, LLDP, Ports, Statistics, VLAN, Bridging, RSTP, IGMP, N-View, N-Ring, N-Link, CIP, Firmware/Config, Support, Rate Limiting, User Management, Logical View, Home, Config, Help, and Logout. A table of links is displayed, including Administration, DHCP, LLDP, Ports, Statistics, VLAN, Bridging, RSTP, IGMP, N-View, N-Ring, N-Link, CIP, Firmware Config, Rate Limiting, and User Management. The "N-View" link is highlighted. The main content area is titled "N-View" and states: "N-View group consists of two categories: 1. Configuration 2. Ports". Under the "Configuration" category, there are two items: "N-View Status: Global N-View status of enabled or disabled." and "N-View Interval: Global interval in seconds for autocasting MIB counters." Under the "Ports" category, there are three items: "Port Name: The descriptive name of the port.", "Multicast on Port?: Specifies whether or not to send autocast packets on this port.", and "Send MIB Stats?: Specifies whether or not to send this port's MIB counters inside autocast packets." The footer shows "Copyright © 2008-2010 N-TRON Corp. All rights reserved. http://www.n-tron.com" and "Logged in as: admin".

**N-View**

N-View group consists of two categories:

1. Configuration
2. Ports

**Configuration**

<b>N-View Status:</b>	Global N-View status of enabled or disabled.
<b>N-View Interval:</b>	Global interval in seconds for autocasting MIB counters.

**Ports**

<b>Port Name:</b>	The descriptive name of the port.
<b>Multicast on Port?:</b>	Specifies whether or not to send autocast packets on this port.
<b>Send MIB Stats?:</b>	Specifies whether or not to send this port's MIB counters inside autocast packets.

Following the N-View link on the help page, the administrator or user can see some information regarding the configuration options in the N-View category on the left side of the web management.

# Help – N-Ring

The screenshot shows a web browser window titled "192.168.1.214 N-TRON Switch fb:4b:70 - Windows Internet Explorer". The address bar shows "http://192.168.1.214/main.ssi". The page features a navigation menu on the left with options like Administration, DHCP, LLDP, Ports, Statistics, VLAN, Bridging, RSTP, IGMP, N-View, N-Ring, N-Link, CIP, Firmware/Config, Support, Rate Limiting, User Management, Logical View, Home, Config, Help, and Logout. The main content area displays a table of links for various configuration options, including Administration, DHCP, LLDP, Ports, Statistics, VLAN, Bridging, RSTP, IGMP, N-View, N-Ring, N-Link, CIP, Firmware/Config, Rate Limiting, and User Management. Below this, the "N-Ring" section is highlighted, showing information about N-Ring configuration and mode settings.

**N-Ring**

N-Ring is divided into two categories:

1. Configuration
2. Status

N-Ring Configuration is divided into two categories:

1. Mode
2. Advanced

**Configuration - Mode**

If N-Ring mode is Manager, the following data will be shown:

<b>N-Ring Mode:</b>	"Manager" - Switch is currently operating as an N-Ring Manager.
<b>Aging Time:</b>	Aging time used when switch is active in an N-Ring. The range is 5-1000000 seconds.
<b>N-Ring Ports:</b>	Port set used as N-Ring ports on this switch. The user can select an existing port set.
<b>VLAN ID:</b>	VLAN in which N-Ring ports are assigned. The VLAN ID is configurable and the range is 1-4094.
<b>Tagging:</b>	Selection as to whether the N-Ring ports are members of the VLAN's Tagged or Untagged ports. NOTE: It is recommended to use Tagged on N-Ring ports.

If N-Ring mode is Auto Member, the following data will be shown:

<b>N-Ring Mode:</b>	"Auto Member" - Switch is currently operating as an N-Ring Auto Member.
<b>Aging Time:</b>	Aging time used when switch is active in an N-Ring. The range is 5-1000000 seconds.

**Configuration - Advanced**

If N-Ring mode is Manager, the following advanced configuration data will be shown:

<b>N-Ring Mode:</b>	"Manager" - Switch is currently operating as an N-Ring Manager.
<b>Self Health Packet Interval:</b>	The amount of time to wait in milliseconds before sending Self-Health packets. The default is 10.
<b>Maximum Missed Packets:</b>	The number of consecutive missed Self-Health packets that constitute a fault. The default is 2.
<b>Sign-On Delay:</b>	The amount of time to wait in milliseconds before requesting initial sign-on information from ring members. The default is 1000.
<b>Sign-On Match Packets:</b>	The number of times the switch count must match before starting.

Following the N-Ring link on the help page, the administrator or user can see some information regarding the configuration options in the N-Ring category on the left side of the web management.

# Help – N-Link

The screenshot shows a web browser window titled "192.168.1.214 N-TRON Switch fa:bc:80 - Windows Internet Explorer". The address bar shows "http://192.168.1.214/main.ssi". The browser's menu bar includes "File", "Edit", "View", "Favorites", "Tools", and "Help". The address bar also shows "192.168.1.214 N-TRON Switch fa:bc:80".

The main content area displays the N-TRON logo and a navigation menu on the left. The menu includes links to Administration, DHCP, LLDP, Ports, Statistics, VLAN, Bridging, RSTP, IGMP, N-View, N-Ring, N-Link, CIP, Firmware/Config, Support, Rate Limiting, User Management, Logical View, Home, Config, Help, and Logout. The "N-Link" link is highlighted.

Below the navigation menu, there is a table of links:

<a href="#">Administration</a>	<a href="#">DHCP</a>	<a href="#">LLDP</a>	<a href="#">Ports</a>
<a href="#">Statistics</a>	<a href="#">VLAN</a>	<a href="#">Bridging</a>	<a href="#">RSTP</a>
<a href="#">IGMP</a>	<a href="#">N-View</a>	<a href="#">N-Ring</a>	<a href="#">N-Link</a>
<a href="#">CIP</a>	<a href="#">Firmware Config</a>	<a href="#">Rate Limiting</a>	<a href="#">User Management</a>
<a href="#">Other</a>			

The main content area is titled "N-Link". It states: "N-Link is divided into two categories: 1. Configuration 2. Status".

**Configuration**

If switch is an N-Link Master, the following data will be shown:

<b>N-Link Mode:</b>	The N-Link mode of switch.
<b>Control Port:</b>	The Control Port is used to convey N-Link control information. There must be a direct link between the Master and Slave Control ports. Use of media converters or other switches is not supported. The default is TX3.
<b>Primary Coupler Port:</b>	The Coupler Port is used to establish a redundant path for Ethernet data transmission. If the Role of the switch is Master the port will be a Primary Coupler. The default is TX4.

If switch is an N-Link Auto Configure, the following data will be shown:

<b>N-Link Mode:</b>	The N-Link mode of switch.
<b>Default Coupler Port:</b>	The Coupler Port is used to establish a redundant path for Ethernet data transmission. If the Role of the switch is Slave the port will be a Standby Coupler. The default is TX4.

**Status**

If switch is an N-Link Master or Slave, the switch Status and Partner information will be shown. (Red background designates a fault condition.)

<b>State:</b>	Current N-Link mode of switch.
<b>Control Port:</b>	The port being used to convey control information. There must be a direct link between the Master and Slave Control ports. Use of media converters or other switches is not supported.

Following the N-Link link on the help page, the administrator or user can see some information regarding the configuration options in the N-Link category on the left side of the web management.

## Help – CIP

The screenshot shows a web browser window titled "192.168.1.214 N-TRON Switch fa:bc:80 - Windows Internet Explorer". The address bar shows "http://192.168.1.214/main.ssi". The browser's menu bar includes File, Edit, View, Favorites, Tools, and Help. The address bar also shows a search icon and the Google logo.

The main content area displays the N-TRON logo and a navigation menu on the left. The menu includes links for Administration, DHCP, LLDP, Ports, Statistics, VLAN, Bridging, RSTP, IGMP, N-View, N-Ring, N-Link, CIP, Firmware/Config, Support, Rate Limiting, User Management, Logical View, Home, Config, Help, and Logout. The CIP link is highlighted.

At the top of the main content area, there is a table of links:

<a href="#">Administration</a>	<a href="#">DHCP</a>	<a href="#">LLDP</a>	<a href="#">Ports</a>
<a href="#">Statistics</a>	<a href="#">VLAN</a>	<a href="#">Bridging</a>	<a href="#">RSTP</a>
<a href="#">IGMP</a>	<a href="#">N-View</a>	<a href="#">N-Ring</a>	<a href="#">N-Link</a>
<a href="#">CIP</a>	<a href="#">Firmware Config</a>	<a href="#">Rate Limiting</a>	<a href="#">User Management</a>
<a href="#">Other</a>			

The main content area is titled "CIP - Common Industrial Protocol". Below the title, it states: "CIP is divided into two categories: 1. Configuration 2. Status".

The "Configuration" section contains a table with the following information:

<b>CIP Status:</b>	Indicates whether CIP is enabled or disabled.
<b>Multicast RPI:</b>	The minimum Requested Packet Interval for Class 1 (multicast) connections, in milliseconds. Requests for less than this value will be rejected.
<b>Unicast RPI:</b>	The minimum Requested Packet Interval for Class 3 (unicast) connections, in milliseconds. Requests for less than this value will be rejected.

The "Status" section contains a table with the following information:

<b>CIP Status:</b>	Indicates whether CIP is enabled or disabled.
--------------------	-----------------------------------------------

The "Identity Information" section contains a table with the following information:

<b>Product Name:</b>	Switch Model Number.
<b>Vendor:</b>	This is N-Tron's ODVA EtherNet/IP Vendor ID (1006).
<b>Device Type:</b>	The ODVA Device Type is Communications Adapter (= 0x0C hex).
<b>Major Revision:</b>	The Major Revision of the CIP implementation.
<b>Minor Revision:</b>	The Minor Revision of the CIP implementation.
<b>Serial Number:</b>	CIP Serial number, unique across all N-Tron CIP devices. This is the last 4 octets of the base switch MAC.

The "Connection Information" section contains a table with the following information:

<b>Number of Multicast Connections:</b>	Current number of CIP Ethernet/IP class 1 (multicast) connections.
<b>Number of Unicast Connections:</b>	Current number of CIP Ethernet/IP class 3 (unicast) connections.

The footer of the page shows the copyright information: "Copyright © 2008-2010 N-TRON Corp. All rights reserved. http://www.n-tron.com". It also shows the user is logged in as "admin".

Following the CIP link on the help page, the administrator or user can see some information regarding the configuration options in the CIP category on the left side of the web management.

## Help – Firmware/Config

The screenshot shows a web browser window titled "192.168.1.214 N-TRON Switch fa:bc:80 - Windows Internet Explorer". The address bar shows "http://192.168.1.214/main.ssi". The browser's menu bar includes "File", "Edit", "View", "Favorites", "Tools", and "Help". The address bar also shows "192.168.1.214 N-TRON Switch fa:bc:80".

The N-TRON logo is at the top left, with the tagline "THE INDUSTRIAL NETWORK COMPANY". Below the logo is a navigation menu with the following items: Administration, DHCP, LLDP, Ports, Statistics, VLAN, Bridging, RSTP, IGMP, N-View, N-Ring, N-Link, CIP, Firmware/Config (selected), Support, Rate Limiting, User Management, Logical View, Home, Config, Help, and Logout.

Below the navigation menu, the following text is displayed: "Copyright © 2008-2010 N-TRON Corp. All rights reserved. http://www.n-tron.com". Below this, it says "Logged in as: admin".

The main content area is titled "Firmware/Config". Below this title is a table with the following columns: Administration, DHCP, LLDP, Ports, Statistics, VLAN, Bridging, RSTP, IGMP, N-View, N-Ring, N-Link, CIP, Firmware/Config (selected), Rate Limiting, User Management, and Other.

Below the table, the "Firmware/Config" page is displayed. It contains the following information:

**FTP**

Server IP Address:	IP address of the TFTP server to which the connection is to be established.
File Name:	Name of the file to be stored or retrieved.
Transfer Type:	Type of transfer to be performed. Choices are: Upload config to server, Download config from server, Download image from server, and Download boot image from server.

If Upload or Download Config from server was selected, these choices present themselves as described:

Main Configuration Settings Checkbox:	Other than SNMP, DHCP, and MAC Security, the other nonvolatile settings are saved together, and can be uploaded or downloaded or neither.
Keep Current IP, Gateway and Subnet Mask Checkbox:	On a configuration download the existing IP, Gateway, and Subnet Mask can be retained if desired.
SNMP Configuration Checkbox:	SNMP related settings are saved separately, and can be uploaded or downloaded separately.
DHCP Server Configuration Checkbox:	DHCP related settings are saved separately, and can be uploaded or downloaded separately.
MAC Security Configuration Settings Checkbox:	Depending on the checkbox below, both manually entered and dynamically learned authorizations will be uploaded or downloaded.
Manually Configured Only Checkbox:	This checkbox is functional if the 'MAC Security Configuration Settings Checkbox' is checked. If selected, 'Manually Configured Only' means that the dynamically learned list of authorized MAC Addresses will not be uploaded or downloaded (in context), and only the manually entered authorizations will be.

Following the Firmware/Config link on the help page, the administrator or user can see some information regarding the configuration options in the Firmware/Config category on the left side of the web management.

## Help – Rate Limiting

The screenshot shows a web browser window titled "192.168.1.214 N-TRON Switch fa:bc:80 - Windows Internet Explorer". The address bar shows "http://192.168.1.214/main.ssi". The browser's menu bar includes "File", "Edit", "View", "Favorites", "Tools", and "Help". The address bar also shows "192.168.1.214 N-TRON Switch fa:bc:80".

The N-TRON logo is at the top left, with the tagline "THE INDUSTRIAL NETWORK COMPANY". Below the logo is a navigation menu with the following items: Administration, DHCP, LLDP, Ports, Statistics, VLAN, Bridging, RSTP, IGMP, N-View, N-Ring, N-Link, CIP, Firmware/Config, Support, Rate Limiting, User Management, Logical View, Home, Config, Help, and Logout. The "Rate Limiting" item is highlighted.

Below the navigation menu, the "Rate Limiting" page is displayed. It has a title "Rate Limiting" and a subtitle "Rate Limiting is divided into two categories: 1. Broadcast 2. Multicast".

Under the "Broadcast" category, there is a table with two rows:

Port Name:	The descriptive name of the port.
Broadcast Pass Rate [%]:	This configurable field displays the broadcast traffic rate. The allowed range is 0-100 and the default is 3% for 100 Mbps maximum capability ports and 1% for 1000 Mbps maximum capability ports (if any). 100% is not limiting.

Under the "Multicast" category, there is a table with two rows:

Port Name:	The descriptive name of the port.
Multicast Pass Rate [%]:	This configurable field displays the multicast traffic rate. The allowed range is 0-100 and the default is 100% for 100 Mbps maximum capability ports and 100% for 1000 Mbps maximum capability ports (if any). 100% is not limiting.

Below the "Multicast" table, there is a note: "Note: This also causes Unicast packets with destinations not in the ARL table to be rate limited rather than all being flooded."

At the bottom of the page, there is a footer with the following text: "Copyright © 2008-2010 N-TRON Corp. All rights reserved. http://www.n-tron.com". Below this, it says "Logged in as: admin".

Following the Rate Limiting link on the help page, the administrator or user can see some information regarding the configuration options in the Rate Limiting category on the left side of the web management.

## Help – User Management

The screenshot shows a web browser window titled "192.168.1.214 N-TRON Switch fa:bc:80 - Windows Internet Explorer". The address bar shows "http://192.168.1.214/main.ssi". The page features the N-TRON logo and a navigation menu on the left. The main content area displays a table of configuration options and a "User Management" section.

**N-TRON THE INDUSTRIAL NETWORK COMPANY**

**Navigation Menu:**

- Administration
- DHCP
- LLDP
- Ports
- Statistics
- VLAN
- Bridging
- RSTP
- IGMP
- N-View
- N-Ring
- N-Link
- CIP
- Firmware/Config
- Support
- Rate Limiting
- User Management
- Logical View
- Home
- Config
- Help
- Logout

**Configuration Options Table:**

<a href="#">Administration</a>	<a href="#">DHCP</a>	<a href="#">LLDP</a>	<a href="#">Ports</a>
<a href="#">Statistics</a>	<a href="#">VLAN</a>	<a href="#">Bridging</a>	<a href="#">RSTP</a>
<a href="#">IGMP</a>	<a href="#">N-View</a>	<a href="#">N-Ring</a>	<a href="#">N-Link</a>
<a href="#">CIP</a>	<a href="#">Firmware Config</a>	<a href="#">Rate Limiting</a>	<a href="#">User Management</a>
<a href="#">Other</a>			

**User Management**

The User Management screen allows users to view, add and remove system user accounts.

**User Management**

No.:	User table index
User Name:	User name string
Access Permission:	A user can have Admin (read/write) or User (read-only) privileges.

Copyright © 2008-2010  
N-TRON Corp.  
All rights reserved.  
<http://www.n-tron.com>

Logged in as: **admin**

Following the User Management link on the help page, the administrator or user can see some information regarding the configuration options in the User Management category on the left side of the web management.

## Help – Other

192.168.1.214 N-TRON Switch fa:bc:80 - Windows Internet Explorer

http://192.168.1.214/main.ssi

File Edit View Favorites Tools Help

192.168.1.214 N-TRON Switch fa:bc:80

**N-TRON**  
THE INDUSTRIAL NETWORK COMPANY

- Administration
- DHCP
- LLDP
- Ports
- Statistics
- VLAN
- Bridging
- RSTP
- IGMP
- N-View
- N-Ring
- N-Link
- CIP
- Firmware/Config
- Support
- Rate Limiting
- User Management
- Logical View
- Home
- Config
- Help
- Logout

Copyright © 2008-2010  
N-TRON Corp.  
All rights reserved.  
http://www.n-tron.com

Logged in as: admin

<a href="#">Administration</a>	<a href="#">DHCP</a>	<a href="#">LLDP</a>	<a href="#">Ports</a>
<a href="#">Statistics</a>	<a href="#">VLAN</a>	<a href="#">Bridging</a>	<a href="#">RSTP</a>
<a href="#">IGMP</a>	<a href="#">N-View</a>	<a href="#">N-Ring</a>	<a href="#">N-Link</a>
<a href="#">CIP</a>	<a href="#">Firmware/Config</a>	<a href="#">Rate Limiting</a>	<a href="#">User Management</a>
<a href="#">Other</a>			

**Support Web Site:** This link leads to the [http://www.n-tron.com/html/support_serv.html](http://www.n-tron.com/html/support_serv.html) web site, which is the official web site of N-TRON Corp., the developer of the switch software.

**Support E-Mail:** To send any queries or suggestions to the support team at N-TRON Corp., the developers of the switch software.

**Logical View:** Shows a graphical depiction of the switch. Linked ports are displayed in green. The page automatically refreshes approximately every 30 seconds.

**Home:** The default home page of the switch. Shows some basic information, such as the switch model and firmware revision.

**Config:** To save or reset the configuration data. This will save the current configuration of the device to the flash for future use.

**Help:** Switch Help.

**Logout:** Logout from the WebConsole.

Internet 100%

Following the Other link on the help page, the administrator or user can see some information regarding other links or categories on the left hand side of the web manager, as above.

# CLI Commands

## “?” (Help)

Command Name	“?”
Description	Show a list of all commands or get help on a specific command.   Without <i>cmd</i>, this command will list all the available commands.   If <i>cmd</i> is specified and if it matches a specific command, the <b>usage</b> of the command will be displayed; otherwise, if <i>cmd</i> matches the prefix of a command, the name of the command will be listed.   If ? is preceded by another ?, the usage and description of this command will be displayed.
Syntax	? [cmd]
Parameters	<b>cmd</b>   The command for which to get help.
Examples	<b>N-TRON/Admin&gt; ?</b>  <i>The above command displays all the available commands.</i>   <b>N-TRON/Admin&gt; abcd ?</b>            Unknown Command: "abcd"   Type "?" for a list of available commands.   <b>N-TRON/Admin&gt; logout ?</b>            Logout                Log out of console interface.   SYNTAX:                Logout   <b>N-TRON/Admin&gt; ? pi</b>            Ping                Ping a host.   ...   <b>N-TRON/Admin&gt; ? ?</b>            ?                Show a list of all commands or get help on a specific command.   SYNTAX:                ? [cmd]   OPTIONS:                cmd : The command for which to get help.
NOTES	

## Logout

Command Name	<b>logout</b>
Description	Log out of console interface
Syntax	<b>logout</b>
Parameters	<b>None</b>
Examples	<b>N-TRON/Admin&gt; logout</b>
NOTES	

## CLI Commands, Continued...

### Show, Add, or Delete ARL Entries

Command Name	<b>arl</b>
Description	Show, Add, or Delete Arl Entries.
Syntax	<b>arl</b> show   showmct   add mac port cpu static vid   del[ete] mac vid
Parameters	<b>show</b> Show entire ARL table.   <b>showmct</b> Show entire ARL MCT (Multicast Index) table.   <b>delete</b> Delete MAC address.   <b>add</b> Add MAC address.   <b>mac</b> MAC Address.   <b>port</b> Port Number.   <b>cpu</b> 1 = Send to CPU also.   <b>static</b> 1 = This is a static address; 0 = Non-Static.   <b>vid</b> VLAN ID (0-4095)
Example	<b>N-TRON/Admin&gt; arl show</b>  <pre> No. Val Age Pri Mod Usr Sta VLAN      MAC      Port(s) -----   1   1   1   0   0   0   1   1 00:07:af:ff:b8:00 CPU   2   1   0   0   0   0   0   1 00:19:b9:03:aa:77 TX3 </pre>  <b>N-TRON/Admin&gt; arl showmct</b>  <pre> No. Idx Val Port Mask  Port(s) -----   1   0   1 0x00000000 (None)   2   1   1 0x00000001 TX1 </pre>  <b>N-TRON/Admin&gt; arl add 00:19:b9:03:aa:79 3 0 1 1</b>   <b>N-TRON/Admin&gt; arl del 00:19:b9:03:aa:79 1</b>
Notes	

## CLI Commands, Continued...

### Save or Reset the Configuration Settings

Command Name	<b>config</b>
Description	Save or reset configuration settings
Syntax	<b>config</b> s[ave]   r[eset]
Parameters	<b>save</b> save current running configuration settings. <b>reset</b> reset configuration settings to factory defaults.
Examples	<b>N-TRON/Admin&gt; config save</b>  <b>Save Settings...</b> <b>Writing 'B:\settings\settings.dat'.</b>  <b>Settings have been saved.</b>  <b>N-TRON/Admin&gt; config reset</b>  <b>Resetting to factory defaults...</b> <b>Load factory default settings [y/n]?y</b> <b>Keep IP, subnet mask, and gateway addresses [y/n]?y</b> <b>Keep current user names and passwords [y/n]?y</b> <b>Keep current SNMP settings [y/n]?y</b> <b>Keep current DHCP Server settings [y/n]?y</b> <b>Keep current MAC Security settings [y/n]?y</b>  <b>*** Model Number Changed ***: Forcing reset of settings values.</b> <b>*** Expected (per HW) = 0x87080000,</b> <b>*** Found (Saved) = 0x00000000,</b>  <b>WARNING: Settings will be reset to factory default values.</b>  <b>Writing 'B:\settings\settings.dat'.</b>  <b>Done. You should now reset the device.</b>  <b>N-TRON/Admin&gt;...</b>
NOTES	

## Configuration Device Operations

Command Name	<b>cfgdev</b>
Description	Info, Format, Compare and Erase Configuration Device.
Syntax	<b>CfgDev</b> info   format [-m model]   compare   erase
Parameters	<b>Info</b> Show information about the configuration device.   <b>Compare</b> Compare the configuration of the switch to the configuration device.   <b>Erase</b> Erase the switch configuration on the configuration device.
Example	<pre> N-TRON/Admin&gt; cfgdev info  Port A:      0xb0c0 Board ID:    0x0006 (6)  Configuration device information:   Name       : At64Kb   Model      : 2   Version    : 1   Page Size  : 128   Total Size : 65536   Max Clock (Hz) : 1000000   Write Cycles (ns): 5000000   Flags      : 0x00000001  N-TRON/Admin&gt;cfgdev compare  Comparing switch configuration to the configuration device... The configurations are different.  N-TRON/Admin&gt; cfgdev erase  Erasing configuration device...  Configuration device erase completed. </pre>
Notes	

## Show or Set CIP Configuration

Command Name	<b>Cip</b>
Description	Show or set CIP configuration. If no parameters are specified, this command will show the CIP configuration (same as -show parameter).
Syntax	<b>-Cip [-e[nable]   -d[isable]   -show]</b>
Parameters	<b>-Cip -show</b> Show CIP configuration. <b>-Cip [-e[nable]   -d[isable]]</b> Set the CIP status to e(nabled) or d(isabled).
Examples	<pre> N-TRON/Admin&gt; cip -show  CIP Configuration: ----- Status:                Enabled EthIp Interval:        10 ms Cache Interval:        2000 ms  Identity Information: ----- Product Name:          N-TRON 708M12 Vendor:                1006 (N-TRON) Device Type:           0x0C (Communications Adapter) Major Revision:        1 Minor Revision:        2 Serial Number:         0xAFFBE400  Connection Information: ----- Multicast Connections: 0 Unicast Connections:   0  N-TRON/Admin&gt; cip -disable Changing CIP configuration...  CIP Configuration: ----- Status:                Disabled EthIp Interval:        10 ms Cache Interval:        2000 ms  Identity Information: ----- Product Name:          N-TRON 708M12 Vendor:                1006 (N-TRON) Device Type:           0x0C (Communications Adapter) Major Revision:        1 Minor Revision:        2 Serial Number:         0xAFFBE400  Connection Information: ----- Multicast Connections: 0 Unicast Connections:   0  Changes have been made that have not been saved.  N-TRON/Admin&gt; </pre>
NOTES	

## Show or Set IGMP Configuration

Command Name	<b>igmp</b>
Description	Show or set IGMP configuration. If no parameters are specified, this command will show the IGMP configuration (same as -show parameter).
Syntax	<b>igmp [-show] [-status state]</b>
Parameters	<b>-show</b> Show configuration. <b>-status state</b> Set the IGMP status to e(nabled) or d(isabled).
Examples	<pre> N-TRON/Admin&gt; igmp -show  IGMP Status           : Enabled IGMP Version          : 2 Query Mode            : Auto CIP Querier Status    : 2, Active-Auto Active Querier IP     : 192.168.2.214 Router Mode           : Auto Manual Router Ports   : (None) IGMP Resource Usage % : 1 IGMP multicast destination addresses: 1 IGMP Number Of Active IP Group Memberships: 1  Changes have been made that have not been saved.  N-TRON/Admin&gt; igmp -status disabled  IGMP Status           : Disabled IGMP Version          : 2 Query Mode            : Auto CIP Querier Status    : 2, Active-Auto Active Querier IP     : 0.0.0.0 Router Mode           : Auto Manual Router Ports   : (None) IGMP Resource Usage % : 1 IGMP multicast destination addresses: 0 IGMP Number Of Active IP Group Memberships: 0  Changes have been made that have not been saved.  N-TRON/Admin&gt;...</pre>
NOTES	

## CLI Commands, Continued...

### Show or Set Mirror Configuration

Command Name	<b>Mirror</b>
Description	Show or set Mirror configuration. If no parameters are specified, this command will show the Mirror configuration (same as -show parameter).
Syntax	<b>mirror</b> [-show] [-status state] [-dp portno] [-tx portlist] [-rx portlist]
Parameters	<b>-show</b> Show configuration. <b>-status state</b> Set the Mirror status to e(nabled) or d(isabled). <b>-dp portno</b> Set the destination port number for mirrored frames. <b>-tx portlist</b> Set the source ports to mirror frames that are transmitted. <b>-rx portlist</b> Set the source ports to mirror frames that are received.
Examples	<b>N-TRON/Admin&gt; mirror -show</b>  Mirror Status : Disabled Destination Port : TX1 Tx Source Ports : (None) Rx Source Ports : (None)  <b>N-TRON/Admin&gt; mirror -status enabled -dp 6 -tx 1,3-5 -rx 1,3,5</b>  Mirror Status : Enabled Destination Port : TX6 Tx Source Ports : TX1, TX3-TX5 Rx Source Ports : TX1, TX3, TX5  Changes have been made that have not been saved. ...
NOTES	The portlist consists of port numbers and ranges, separated by commas. It may not contain space characters. Use “all” to set all ports as source ports, and use “none” to clear all ports from source ports.

## CLI Commands, Continued...

### Show or Set N-Ring Configuration

Command Name	<b>Nring</b>
Description	Show or set N-Ring configuration. If no parameters are specified, this command will show the N-Ring configuration (same as -show parameter).
Syntax	<b>nring</b> [-show] [-mode d   a   m] [-ports set_id]
Parameters	<b>-show</b> Show configuration.   <b>-mode</b> Set the N-Ring mode. d = disabled, a = auto member, m = manager   <b>-ports set_id</b> Set the ring ports for N-Ring manager mode. Specify port set identifier or use '?' to list available port sets.
Examples	<b>N-TRON/Admin&gt; nring -show</b>   N-Ring Mode : Auto Member Aging Time : 20   <b>N-TRON/Admin&gt; nring -ports ?</b>  <pre> ID      Port Set --      - 1       TX1 / TX2 2       TX7 / TX8 </pre>  <b>N-TRON/Admin&gt; nring -mode m -ports 2</b>   Do you Want to Save Changes and Restart the System Now [y/n]? ...
NOTES	

### Show or Set N-View Configuration

Command Name	<b>Nview</b>
Description	Show or set N-View configuration. If no parameters are specified, this command will show the N-View configuration (same as -show parameter).
Syntax	<b>nview</b> [-show] [-status state]
Parameters	<b>-show</b> Show configuration.   <b>-status state</b> Set the N-View status to e(nabled) or d(isabled).
Examples	<b>N-TRON/Admin&gt; nview -show</b>   N-View Status : Enabled N-View Interval : 5   <b>N-TRON/Admin&gt; nview -status disabled</b>   N-View Status : Disabled N-View Interval : 5   Changes have been made that have not been saved. ...
NOTES	

## CLI Commands, Continued...

### Ping a Host

Command Name	<b>Ping</b>
Description	Ping a host
Syntax	<b>ping</b> [-t] [-n count] [-w timeout] target_name
Parameters	<b>target_name</b> IP Address or host name.  <b>-t</b> Ping the specified host until stopped. To see statistics and continue - type Space; To stop - type Control-C.  <b>-n count</b> Number of echo requests to send.  <b>-w timeout</b> Timeout in milliseconds to wait for each reply.
Example	<b>N-TRON/Admin&gt; ping 192.168.1.119</b> ... <b>N-TRON/Admin&gt; ping -n 6 192.168.1.119</b> ... <b>N-TRON/Admin&gt; ping -t 192.168.1.119</b> ... <b>N-TRON/Admin&gt; ping -w 2000 192.168.1.119</b>  Reply from 192.168.1.119: time=970ms Reply from 192.168.1.119: time<10ms Reply from 192.168.1.119: time<10ms  Ping statistics for 192.168.1.119: Packets: Sent = 4, Received = 3, Lost = 1 (25% loss) Approximate round trip times in milliseconds: Minimum = 0ms, Maximum = 970ms, Average = 320ms
Notes	

## CLI Commands, Continued...

### Show or Set Port Configuration

Command Name	<b>Port</b>
Description	Show or set Port configuration.
Syntax	<b>Port</b> [-show] [-admin state] [-sd auto   10h   10f   100h   100f   1000f] [-flow state][fhp state][dp prio] [-dscp state] [-8021p state] [-pvid vid] [-ual percent][uah percent] [-security state] portno
Parameters	<b>portno</b> Port number to configure or show. Specify “all” to show all ports.   <b>-show</b> Show configuration.   <b>-admin state</b> Set the admin status for the port to e(nabled) or d(isabled).   <b>-sd</b> Set the speed and duplex mode for the port. auto = enable auto-negotiation   <b>-flow state</b> Set the flow control for the port to e(nabled) or d(isabled).   <b>-fhp state</b> Set force high priority for the port to e(nabled) or d(isabled).   <b>-dp prio</b> Set the default QOS priority for the port. The range is 0-7.   <b>-dscp</b> Include DSCP Priority for the port.   <b>-8021p</b> Include 802.1p Priority for the port.   <b>-pvid vid</b> Set the VLAN ID for the port. The range is 1-4094.   <b>-ual percent</b> Set the usage alarm low percentage. The range is 0-100.   <b>-uah percent</b> Set the usage alarm high percentage. The range is 0-100.   <b>-security</b> Set the security status for all supported ports.
Examples	<b>N-TRON/Admin&gt; port -sd 100f -flow enabled -dp 7 -pvid 2 5</b>  <pre> Usage Usage Port Port  Admin  Link  Auto  Port Dupl  Flow      Force  Include  Include  Def  Port      Alarm Alarm  Security No  Name  Status  Stat  Nego  Spd  Mode Control High Pri  DSCP    802.1p Pri  State      PVID Low % High %  Status -----   5 TX5  Enabled  Up    Disabled  100 Full Enabled  Disabled Enabled  Enabled  7 Forwarding  2    0    100 Disabled           </pre>  <b>Changes have been made that have not been saved.</b>   <b>N-TRON/Admin&gt;</b>
NOTES	

### Reset the Switch

Command Name	<b>Reset</b>
Description	Reset (reboot) the switch
Syntax	<b>Reset</b>
Parameters	<b>None</b>
Example	<b>N-TRON/Admin&gt; reset</b>   Preparing for reset.   Cleaning up...   Browser will be redirected to 192.168.2.214.   Disabling SNMP...   Disabling DHCP...   Disabling CIP...   Locking out other processes...   Disable preemption...   Resetting device...   ...
Notes	

## CLI Commands, Continued...

### Show or Set SNMP Configuration

Command Name	<b>Snmp</b>
Description	Show or set SNMP configuration. If no parameters are specified, this command will show the SNMP configuration (same as -show parameter).
Syntax	<b>snmp</b> [-show] [-ro name] [-rw name] [-trap name]
Parameters	<b>-show</b> Show configuration.   <b>-ro name</b> Set the Authorized Community Name for SNMP Get requests.   <b>-rw name</b> Set the Authorized Community Name for SNMP Set requests.   <b>-trap name</b> Set the Authorized Community Name for SNMP Traps.
Examples	<b>N-TRON/Admin&gt; snmp -ro users</b>  <pre> IP Address - Trap Stn.#1   : Value Not Configured IP Address - Trap Stn.#2   : Value Not Configured IP Address - Trap Stn.#3   : Value Not Configured IP Address - Trap Stn.#4   : Value Not Configured IP Address - Trap Stn.#5   : Value Not Configured Read-Only Community Name  : users Read-Write Community Name : private Trap Community Name       : public </pre>  Changes have been made that have not been saved. ...
NOTES	Community names may only contain alphanumeric, space, '-', '_', and '#' characters, and may not begin with a number, space, or underscore. A name with embedded space characters must be enclosed in quotes. The maximum length is 15 characters.

### Show or Clear the Last System Error

Command Name	<b>Syserr</b>
Description	Show or clear the last system error
	If <i>clear</i> is not supplied, then the last system error is displayed.
Syntax	<b>syserr</b> [clear]
Parameters	<b>Clear</b> Clear the last system error.
Example	<b>N-TRON/Admin&gt; syserr</b> Last System Error: None.   <b>N-TRON/Admin&gt; syserr clear</b> Last System Error: Cleared.
Notes	

## CLI Commands, Continued...

### Show System Information

Command Name	<b>Sysinfo</b>
Description	Show system information
Syntax	<b>Sysinfo</b>
Parameters	<b>None</b>
Example	<pre> N-TRON/Admin&gt; Sysinfo  +++++ + + N-TRON 700/7000/7500 Series + +++++ + + Model:          708M12 + Boot Loader:    BL 2.0.5.1 (0x02000501) + OS Version:     3.4.2 + Build Date:     Jun 17 2010 at 16:31:37 + Copyright:      Copyright (c) 2008-2010 N-TRON Corp. All rights reserved. + + Processor:      66 MHz (66000000) + SDRAM Size:     16 MB + Flash Size:     8 MB + File System:    6422528 Bytes, 348160 Free, 6074368 Used, 0 Bad + MAC Address:    00:07:af:fb:e4:00 + IP Address:     192.168.2.214 + Subnet Mask:    255.255.255.0 + Gateway:        192.168.1.9 + Cfg Device:     At64Kb + +++++  N-TRON/Admin&gt; </pre>
Notes	

## CLI Commands, Continued...

### Set or Show the System IP Configuration

Command Name	<b>Sysip</b>
Description	Set system IP configuration mode, IP address, subnet mask, and gateway   If no parameters are specified, this command will show the system IP addresses. Static IP, subnet mask, or gateway can be set while in either DHCP or static configuration mode as they will be used with IP fallback when in DHCP mode. If the Static IP is set to the default system IP address, IP fallback will not occur. All system addresses must be formatted as: xxx.xxx.xxx.xxx.
Syntax	<b>sysip</b> [-c config_mode] [-i static_ip] [-s static_subnet_mask] [-g static_gateway]
Parameters	<b>-c config_mode</b> s(tatic) or d(hcp).   <b>-i static_ip</b> Static IP address (for static config mode and IP fallback ).   <b>-s static_subnet_mask</b> Static sub net mask (for static config mode and IP fallback ).   <b>-g static_gateway</b> Static gateway address ( for static config mode and IP fallback ).
Example	<b>N-TRON/Admin&gt; sysip</b>   IP Configuration Mode : Static  Static IP Address : 192.168.1.225  Static subnet Mask : 255.255.255.0  Static gateway : 192.168.1.1   <b>N-TRON/Admin&gt; sysip -c dhcp</b>   IP Configuration Mode : DHCP (has been changed)  Fallback IP Address : 192.168.1.225  Fallback Subnet Mask : 255.255.255.0  Fallback Gateway : 192.168.1.1   Press &lt;ENTER&gt; to Save Changes and Restart the System Now  ...   <b>N-TRON/Admin&gt; sysip -i 192.168.2.119 -s 255.255.252.0 -g 192.168.1.1</b>   IP Configuration Mode : Static  Static IP Address : 192.168.2.119 (has been changed)  Static Subnet Mask : 255.255.252.0 (has been changed)  Static Gateway : 192.168.1.1 (has been changed)   Press &lt;ENTER&gt; to Save Changes and Restart the System Now  ...
NOTES	If mode is set to DHCP and IP fallback occurs, DHCP requests will stop.   If mode is set to DHCP and IP Configuration is retrieved from a DHCP server, IP fallback will not occur, even if lease is lost.

## CLI Commands, Continued...

### Show or Set System Configuration

Command Name	System
Description	Show or set System configuration. If no parameters are specified, this command will show the System configuration (same as -show parameter).
Syntax	<b>system</b> [-show] [-name label] [-browser state]
Parameters	<b>-show</b> Show configuration. <b>-name label</b> Set the switch name. <b>-browser state</b> Set the browser access status to e(nabled) or d(isabled).
Examples	<b>N-TRON/Admin&gt; system -name "Private Switch" -browser disabled</b>  <b>IP Configuration : Static</b> <b>Client ID (hex) : 0007affbe400</b> <b>IP Address : 192.168.2.214</b> <b>Subnet Mask : 255.255.255.0</b> <b>Gateway : 192.168.1.9</b> <b>MAC Address : 00:07:af:fb:e4:00</b> <b>System Up Time : 0 days, 0 hours, 17 mins, 2 secs</b> <b>Name : Private Switch</b> <b>Contact : N-TRON Admin</b> <b>Location : Mobile, AL 36609</b> <b>Browser Access : Disabled</b>  <b>Changes have been made that have not been saved.</b>  <b>N-TRON/Admin&gt;</b>
NOTES	A switch name may only contain alphanumeric, space, '.', '-', '_', and '#' characters, and may not begin with a number, space, or underscore. A name with embedded space characters must be enclosed in quotes.

## VLAN Addition and Deletion Example

The screen capture below is the factory default VLAN configuration.

### VLAN Configuration View

Replace VID With Default Port VID	<input type="checkbox"/>
Perform Ingress Filtering	<input type="checkbox"/>
Discard Non-Tagged For Ports	(None)

VLAN ID	VLAN Name	Group Members	Untag On Egress	Allow Mgmt
0001	Default VLAN	TX1, TX2, TX3, TX4, TX5, TX6, TX7, TX8	TX1, TX2, TX3, TX4, TX5, TX6, TX7, TX8	<input checked="" type="checkbox"/>

ModifyRefresh

Clicking on the “Modify” button allows one to add a new VLAN:

## VLAN Configuration

<b>Replace VID Tag With Default Port VID</b>	<input type="checkbox"/>
<b>Perform Ingress Filtering</b>	<input type="checkbox"/>
<b>Discard Non-Tagged For Ports</b>	<input type="checkbox"/> TX1 <input type="checkbox"/> TX2 <input type="checkbox"/> TX3 <input type="checkbox"/> TX4 <input type="checkbox"/> TX5 <input type="checkbox"/> TX6 <input type="checkbox"/> TX7 <input type="checkbox"/> TX8
Update   Cancel	

VLAN Groups					
VLAN ID	VLAN Name	Group Members	Untag On Egress	Allow Mgmt	Delete
0001	Default VLAN	TX1, TX2, TX3, TX4, TX5, TX6, TX7, TX8	TX1, TX2, TX3, TX4, TX5, TX6, TX7, TX8	<input checked="" type="checkbox"/>	
Add					

When creating a new VLAN, a numeric ID is required, Name is entered. Note that N-Ring VLAN is a reserved name with a special meaning. Choices such as “Allow Management” and “Change PVID of Member Ports” are made at this time as well as the ports which are going to belong to the new VLAN. Additionally, the ports may be “Untagged on Egress”.

## Tagged VLAN Group Configuration

<b>ID</b>	2
<b>Name</b>	New VLAN
<b>Allow Management</b>	<input type="checkbox"/>
<b>Change PVID Of Member Ports</b>	<input checked="" type="checkbox"/>

### Group Ports

Port No	Port Name	Group Member	Untag On Egress
01	TX1	<input type="checkbox"/>	<input type="checkbox"/>
02	TX2	<input type="checkbox"/>	<input type="checkbox"/>
03	TX3	<input checked="" type="checkbox"/>	<input type="checkbox"/>
04	TX4	<input checked="" type="checkbox"/>	<input type="checkbox"/>
05	TX5	<input type="checkbox"/>	<input type="checkbox"/>
06	TX6	<input type="checkbox"/>	<input type="checkbox"/>
07	TX7	<input type="checkbox"/>	<input type="checkbox"/>
08	TX8	<input type="checkbox"/>	<input type="checkbox"/>

The result of add is a “New VLAN”. In this case, it does not overlap the “Default VLAN” ports.

## VLAN Configuration View

<b>Replace VID With Default Port VID</b>	<input type="checkbox"/>
<b>Perform Ingress Filtering</b>	<input type="checkbox"/>
<b>Discard Non-Tagged For Ports</b>	(None)

VLAN ID	VLAN Name	Group Members	Untag On Egress	Allow Mgmt
0001	Default VLAN	TX1, TX2, TX5, TX6, TX7, TX8	TX1, TX2, TX5, TX6, TX7, TX8	<input checked="" type="checkbox"/>
0002	New VLAN	TX3, TX4	(None)	<input type="checkbox"/>

The ports of "New VLAN" may be added back to "Default VLAN" to create overlapping VLANs.

Note: If there are multiple ports on different VLANs, the 708 will apply the static multicast address to the lowest VLAN-ID that is associated with one of the ports assigned to the static multicast address. If the lowest VLAN-ID contains all the ports assigned to the static multicast address (an umbrella VLAN), it will function for all those ports with no problems. This can be achieved with overlapping VLANs.

### VLAN Configuration View

Replace VID With Default Port VID	<input type="checkbox"/>
Perform Ingress Filtering	<input type="checkbox"/>
Discard Non-Tagged For Ports	(None)

VLAN ID	VLAN Name	Group Members	Untag On Egress	Allow Mgmt
0001	Default VLAN	TX1, TX2, TX3, TX4, TX5, TX6, TX7, TX8	TX1, TX2, TX5, TX6, TX7, TX8	<input checked="" type="checkbox"/>
0002	New VLAN	TX3, TX4	(None)	<input type="checkbox"/>

But notice that the ports in "New VLAN" are not marked as "Untag on Egress" and are thus still tagged.

And the "New VLAN" may be deleted when it is no longer required:

## VLAN Configuration

Replace VID Tag With Default Port VID	<input type="checkbox"/>
Perform Ingress Filtering	<input type="checkbox"/>
Discard Non-Tagged For Ports	<input type="checkbox"/> TX1 <input type="checkbox"/> TX2 <input type="checkbox"/> TX3 <input type="checkbox"/> TX4 <input type="checkbox"/> TX5 <input type="checkbox"/> TX6 <input type="checkbox"/> TX7 <input type="checkbox"/> TX8
Update   Cancel	

VLAN Groups					
VLAN ID	VLAN Name	Group Members	Untag On Egress	Allow Mgmt	Delete
0001	Default VLAN	TX1, TX2, TX3, TX4, TX5, TX6, TX7, TX8	TX1, TX2, TX5, TX6, TX7, TX8	<input checked="" type="checkbox"/>	
0002	New VLAN	TX3, TX4	(None)	<input type="checkbox"/>	Delete
Add					

## VLAN Configuration

Replace VID Tag With Default Port VID	<input type="checkbox"/>
Perform Ingress Filtering	<input type="checkbox"/>
Discard Non-Tagged For Ports	<input type="checkbox"/> TX1 <input type="checkbox"/> TX2 <input type="checkbox"/> TX3 <input type="checkbox"/> TX4 <input type="checkbox"/> TX5 <input type="checkbox"/> TX6 <input type="checkbox"/> TX7 <input type="checkbox"/> TX8
Cancel	

**Windows Internet Explorer** ✖

VLAN ID: 2

Are you sure you want to delete this VLAN?

VLAN Groups					
VLAN ID	VLAN Name	Group Members	Untag On Egress	Allow Mgmt	Delete
0001	Default VLAN	TX1, TX2, TX3, TX4, TX5, TX6, TX7, TX8	TX1, TX2, TX5, TX6, TX7, TX8	<input checked="" type="checkbox"/>	
0002	New VLAN	TX3, TX4	(None)	<input type="checkbox"/>	Delete
Add					

And the “New VLAN” is removed. Note that the new configuration of the switch must be saved if the configuration must survive a power cycle.

## VLAN Configuration

Replace VID Tag With Default Port VID	<input type="checkbox"/>
Perform Ingress Filtering	<input type="checkbox"/>
Discard Non-Tagged For Ports	<input type="checkbox"/> TX1 <input type="checkbox"/> TX2 <input type="checkbox"/> TX3 <input type="checkbox"/> TX4
	<input type="checkbox"/> TX5 <input type="checkbox"/> TX6 <input type="checkbox"/> TX7 <input type="checkbox"/> TX8
Update   Cancel	

VLAN Groups					
VLAN ID	VLAN Name	Group Members	Untag On Egress	Allow Mgmt	Delete
0001	Default VLAN	TX1, TX2, TX3, TX4, TX5, TX6, TX7, TX8	TX1, TX2, TX5, TX6, TX7, TX8	<input checked="" type="checkbox"/>	
Add					

**NOTE:** Changes have been made that have not been [saved](#).

# VLAN Configuration Examples

A VLAN is an administratively configured LAN segment that limits the traffic in multiple broadcast domains. Instead of physically reconnecting a device to a different LAN, network administrators can accomplish this task by configuring a VLAN compliant switch to create logical network segments.

Tagged VLAN allows switch segmentation to span across multiple managed switches. This type of VLAN is ideal for LANs that consist of various types of communication groups such as Office LANs, Controls Systems, and IP Cameras. When used properly, it will effectively isolate two or more groups from each other in a logical manner. This means that Broadcast, Multicast, and Unicast frames in one VLAN will not interfere with another isolated VLAN group.

The examples in this section are shown as configured on a 708TX switch, but the 7012FX2 series may be configured similarly with the additional ports.

## Example 1 – Basic understanding of port-based VLANs

### VLAN Configuration View

Replace VID With Default Port VID	<input type="checkbox"/>
Perform Ingress Filtering	<input type="checkbox"/>
Discard Non-Tagged For Ports	(None)

VLAN ID	VLAN Name	Group Members	Untag On Egress	Allow Mgmt
0001	Default VLAN	TX3, TX4, TX5, TX6, TX7, TX8	TX3, TX4, TX5, TX6, TX7, TX8	<input checked="" type="checkbox"/>
0002	VLAN-2	TX1, TX2	TX1, TX2	<input type="checkbox"/>

### Port Configuration View

Port No	Port Name	PVID
<a href="#">01</a>	TX1	2
<a href="#">02</a>	TX2	2
<a href="#">03</a>	TX3	1
<a href="#">04</a>	TX4	1
<a href="#">05</a>	TX5	1
<a href="#">06</a>	TX6	1
<a href="#">07</a>	TX7	1
<a href="#">08</a>	TX8	1

Receiving Port #	Tagged VID in packet	Destination Address	Transmitting Port #s	Notes
TX1	Untagged	MAC on port TX2	TX2	Unicast Traffic
TX1	Untagged	Unknown MAC	TX2	Floods VLAN 2
TX1	VID 4	MAC on port TX2	--	Packet Discarded
TX3	Untagged	MAC on port TX5	TX5	Unicast Traffic
TX3	Untagged	Unknown MAC	TX4-TX8	Floods VLAN 1
TX3	VID 4	MAC on port TX6	--	Packet Discarded

**Example 2 – Basic understanding of tagged VLANs (Admit – Tagged Only)**

## VLAN Configuration View   Port Configuration View

Replace VID With Default Port VID	<input type="checkbox"/>
Perform Ingress Filtering	<input type="checkbox"/>
Discard Non-Tagged For Ports	TX1, TX2, TX3, TX5, TX6, TX7, TX8

VLAN ID	VLAN Name	Group Members	Untag On Egress	Allow Mgmt
0001	Default VLAN	TX3, TX5, TX6, TX7, TX8	(None)	<input type="checkbox"/>
0002	VLAN-2	TX1, TX2	(None)	<input type="checkbox"/>
0003	VLAN-3	TX4	(None)	<input checked="" type="checkbox"/>

Port No	Port Name	PVID
<a href="#">01</a>	TX1	1
<a href="#">02</a>	TX2	1
<a href="#">03</a>	TX3	1
<a href="#">04</a>	TX4	3
<a href="#">05</a>	TX5	1
<a href="#">06</a>	TX6	1
<a href="#">07</a>	TX7	1
<a href="#">08</a>	TX8	1

Receiving Port #	Tagged VID in packet	Destination Address	Transmitting Port #s	Notes
TX1	Untagged	MAC on port TX2	--	Packet Discarded
TX1	VID 2	MAC on port TX2	TX2	Unicast Traffic
TX1	VID 4	MAC on port TX2	--	Packet Discarded
TX1	VID 2	MAC on port TX5	TX2	Floods VLAN 2
TX3	Untagged	MAC on port TX1	--	Packet Discarded
TX3	VID 1	MAC on port TX6	TX6	Unicast Traffic
TX3	VID 1	Unknown MAC	TX5-TX8	Floods VLAN 1
TX3	VID 4	MAC on port TX8	--	Packet Discarded

**Example 3** – Basic understanding of tagged VLANs (Admit – All)

## VLAN Configuration View    Port Configuration View

Replace VID With Default Port VID	<input type="checkbox"/>
Perform Ingress Filtering	<input type="checkbox"/>
Discard Non-Tagged For Ports	(None)

VLAN ID	VLAN Name	Group Members	Untag On Egress	Allow Mgmt
0001	Default VLAN	TX3, TX4, TX5, TX6, TX7, TX8	(None)	<input checked="" type="checkbox"/>
0002	VLAN-2	TX1, TX2	(None)	<input type="checkbox"/>

Port No	Port Name	PVID
<a href="#">01</a>	TX1	2
<a href="#">02</a>	TX2	2
<a href="#">03</a>	TX3	1
<a href="#">04</a>	TX4	1
<a href="#">05</a>	TX5	1
<a href="#">06</a>	TX6	1
<a href="#">07</a>	TX7	1
<a href="#">08</a>	TX8	1

Receiving Port #	Tagged VID in packet	Destination Address	Transmitting Port #s	Notes
TX1	Untagged	MAC on port TX2	TX2	Adds VID 2 to packet
TX1	VID 2	MAC on port TX2	TX2	Unicast Traffic
TX1	VID 4	MAC on port TX2	--	Packet Discarded
TX1	VID 2	Unknown MAC	TX2	Floods VLAN 2
TX3	Untagged	Unknown MAC	TX4-TX8	Adds VID 1 to packet & Floods VLAN 1
TX3	VID 1	MAC on port TX6	TX6	Unicast Traffic
TX3	VID 1	Unknown MAC	TX4-TX8	Floods VLAN 1
TX3	VID 4	MAC on port TX7	--	Packet Discarded

## Example 4 – Basic understanding of Hybrid VLANs

### VLAN Configuration View Port Configuration View

Replace VID With Default Port VID	<input type="checkbox"/>
Perform Ingress Filtering	<input type="checkbox"/>
Discard Non-Tagged For Ports	(None)

VLAN ID	VLAN Name	Group Members	Untag On Egress	Allow Mgmt
0001	Default VLAN	TX3, TX4, TX5, TX6, TX7, TX8	TX3, TX4, TX5, TX6, TX7, TX8	<input checked="" type="checkbox"/>
0002	VLAN-2	TX1, TX2, TX3, TX4	TX1, TX2	<input type="checkbox"/>

Port No	Port Name	PVID
<a href="#">01</a>	TX1	2
<a href="#">02</a>	TX2	2
<a href="#">03</a>	TX3	1
<a href="#">04</a>	TX4	1
<a href="#">05</a>	TX5	1
<a href="#">06</a>	TX6	1
<a href="#">07</a>	TX7	1
<a href="#">08</a>	TX8	1

Receiving Port #	Tagged VID in packet	Destination Address	Transmitting Port #s	Notes
TX1	Untagged	MAC on port TX2	TX2	Unicast Traffic
TX1	Untagged	MAC on port TX3	TX3	Adds VID 2 in the packet
TX1	VID 4	MAC on port TX2	--	Packet Discarded
TX1	VID 4	MAC on port TX3	--	Packet Discarded
TX1	VID 2	MAC on port TX2	TX2	Strips VID off packet
TX3	Untagged	MAC on port TX6	TX6	Unicast Traffic
TX3	Untagged	Unknown MAC	TX4-TX8	Floods VLAN 1
TX3	VID 4	MAC on port TX5	--	Packet Discarded
TX3	VID 4	MAC on port TX4	--	Packet Discarded
TX3	VID 2	MAC on port TX4	TX4	Does not strip VID off packet
TX3	VID 2	MAC on port TX1	TX1	Strips VID off packet

## Example 5 – Basic understanding of Overlapping VLANs

### VLAN Configuration View   Port Configuration View

Replace VID With Default Port VID	<input type="checkbox"/>
Perform Ingress Filtering	<input type="checkbox"/>
Discard Non-Tagged For Ports	(None)

VLAN ID	VLAN Name	Group Members	Untag On Egress	Allow Mgmt
0001	Default VLAN	(None)	(None)	<input type="checkbox"/>
0002	VLAN-2	TX1, TX2, TX3, TX4, TX5, TX6, TX7, TX8	TX1, TX2, TX3, TX4, TX5, TX6, TX7, TX8	<input type="checkbox"/>
0003	VLAN-3	TX2, TX3, TX4, TX5, TX6, TX7, TX8	TX2, TX3, TX4, TX5, TX6, TX7, TX8	<input checked="" type="checkbox"/>
0004	VLAN-4	TX1, TX2	TX1, TX2	<input type="checkbox"/>

Port No	Port Name	PVID
<u>01</u>	TX1	4
<u>02</u>	TX2	2
<u>03</u>	TX3	3
<u>04</u>	TX4	3
<u>05</u>	TX5	3
<u>06</u>	TX6	3
<u>07</u>	TX7	3
<u>08</u>	TX8	3

Receiving Port #	Tagged VID in packet	Destination Address	Transmitting Port #s	Notes
TX1	Untagged	MAC on port TX2, VID=4	TX2	Unicast Traffic
TX1	Untagged	MAC on port TX3	TX2	Floods VLAN 4
TX1	VID 4	MAC on port TX2, VID=4	TX2	Strips VID off packet
TX1	VID 4	Unknown MAC	TX2	Strips VID off packet & Floods VLAN 4
TX2	Untagged	MAC on port TX1, VID=2	TX1	Unicast Traffic
TX2	Untagged	MAC on port TX5, VID=2	TX5	Unicast Traffic
TX2	VID 2 or 3	MAC on port TX5, VID=2 and 3	TX5	Strips VID off packet (or floods if MAC is unknown for VID)
TX2	Untagged	Unknown MAC	TX1, TX3-TX8	Floods VLAN 2
TX3	Untagged	MAC on port TX1, VID=3	TX2, TX4-TX8	Floods VLAN 3
TX3	Untagged	MAC on port TX2, VID=3	TX2	Unicast Traffic
TX3	Untagged	MAC on port TX5, VID=3	TX5	Unicast Traffic
TX3	VID 2 or 3	MAC on port TX2, VID=2 and 3	TX2	Strips VID off packet (or floods if MAC is unknown for VID)

## Example 6 – Basic understanding of VLANs with Multicast Filtering

### VLAN Configuration View    Port Configuration View

Replace VID With Default Port VID	<input type="checkbox"/>
Perform Ingress Filtering	<input type="checkbox"/>
Discard Non-Tagged For Ports	(None)

VLAN ID	VLAN Name	Group Members	Untag On Egress	Allow Mgmt
0001	Default VLAN	(None)	(None)	<input type="checkbox"/>
0002	VLAN-2	TX1, TX2, TX3, TX4, TX5, TX6, TX7, TX8	TX1, TX2, TX3, TX4, TX5, TX6, TX7, TX8	<input type="checkbox"/>
0003	VLAN-3	TX2, TX3, TX4, TX5, TX6, TX7, TX8	TX2, TX3, TX4, TX5, TX6, TX7, TX8	<input checked="" type="checkbox"/>
0004	VLAN-4	TX1, TX2	TX1, TX2	<input type="checkbox"/>

Port No	Port Name	PVID
<u>01</u>	TX1	4
<u>02</u>	TX2	2
<u>03</u>	TX3	3
<u>04</u>	TX4	3
<u>05</u>	TX5	3
<u>06</u>	TX6	3
<u>07</u>	TX7	3
<u>08</u>	TX8	3

Static Multicast Group Address Filters		
Multicast Address	Port List	VLAN ID
01:00:00:00:00:01	TX1, TX2, TX3, TX4, TX5, TX6, TX7, TX8	2
01:00:00:00:00:02	TX1, TX6, TX8	3

Receiving Port #	Tagged VID in packet	Destination Address	Transmitting Port #s	Notes
TX1	Untagged	01:00:00:00:00:01	TX2	Goes to ports TX1-TX8, but TX1 can only send to TX2 (VLAN 4)
TX3	Untagged	01:00:00:00:00:02	TX6, TX8	Goes to ports TX2, TX6-TX8 (VLAN 3) but filter keeps it on ports TX6 and TX8 only
TX2	Untagged	01:00:00:00:00:01	TX1, TX3-TX8	Goes to ports TX1-TX8, but won't go back out the port it came in on
TX2	Untagged	01:00:00:00:00:02	TX1, TX3-TX8	Goes to ports TX1, TX3-TX8
TX3	Untagged	01:00:00:00:00:01	TX2, TX4-TX8	Goes to ports TX2, TX4-TX8
TX6	Untagged	01:00:00:00:00:02	TX8	Goes to port TX8
TX3	Untagged	01:00:00:00:00:02	TX6, TX8	Goes to ports TX6 and TX8

Note: If there are multiple ports on different VLANs, the 708 will apply the static multicast address to the lowest VLAN-ID that is associated with one of the ports assigned to the static multicast address. If the lowest VLAN-ID contains all the ports assigned to the static multicast address (an umbrella VLAN), it will function for all those ports with no problems. This can be achieved with overlapping VLANs.

For further information and examples on overlapping vlans, see:

<http://www.n-tron.com/pdf/overlappingportvlan.pdf>

# KEY SPECIFICATION – 708M12

## Switch Properties

Number of MAC Addresses:	8,000
Aging Time:	Programmable
Latency Type:	2.9 $\mu$ s
Switching Method:	Store & Forward

## Physical

Height:	6.7" (16.9 cm)
Width:	6.7" (16.9 cm)
Depth:	1.8" (4.6 cm)
Weight:	3.4 lbs. (1.6 kg)
DIN Rail	35 mm (Optional)

## Electrical

Redundant Input Voltage:	10-30VDC (Regulated)
High Voltage:	40-160VDC (Regulated)
	Redundant applications both inputs must be provided from the same Class 2 source.
Input Current (max):	250mA max. @ 24VDC
Inrush @ 24VDC:	15.0A/1.0ms @ 24VDC
Input Ripple:	Less than 100 mV
N-TRON Power Supply:	NTPS-24-1.3 (1.3 Amp@24VDC) (NOTE: Not appropriate for use with M12, POE, and HV models.)

## Environmental

Operating Temperature:	-40°C to 80°C
Storage Temperature:	-40°C to 85°C
Operating Humidity:	5% to 100% (Non Condensing)
Operating Altitude:	0 to 10,000 ft.


## Shock and Vibration (bulkhead mounting)

Shock:	200g @ 10ms
Vibration/Seismic:	50g, 5-200Hz, Triaxial

## Reliability

MTBF: >2 Million Hours

## Pin Assignments

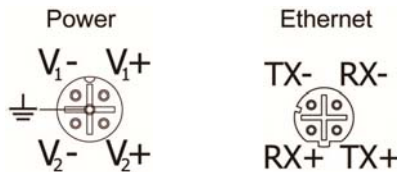

**Warranty:** 3 years from the date of purchase.



## Connectors

10/100BaseTX:	(8) M12 D Coded Female Copper Ports
POWER:	(1) M12 A Coded Male Port
COM:	(1) M12 A Coded Female CLI Port
NTCD-M12:	(1) M12 A Coded Female Configuration Device Port

## Recommended Wiring Clearance:

Front: 4" (10.16 cm)

## Network Media

10BaseT:	>Cat3 Cable
100BaseTX:	>Cat5 Cable
	minimum length : 1 meter
	maximum length : 100 meters

## **Regulatory Approvals:**

**Safety:** UL Listed per ANSI/ISA-12.12.01-2007 (US and Canada)

This equipment is suitable for use in Class I, Div 2, Groups A, B, C, D,  
or non-hazardous locations, T4A

The high voltage model is TÜV approved GS per EN 60950-1.

**EMI:** EN61000-6-4, EN55011 – Class A

CFR Title 47, Part 15, Subpart B - Class A

ICES-003 – Class A

**EMS:** EN61000-6-2

EN61000-4-2 (ESD)

EN61000-4-3 (RS)

EN61000-4-4 (EFT)

EN61000-4-5 (Surge)

EN61000-4-6 (Conducted Disturbances)

IEC 61000-4-8 (Power-frequency Magnetic Field)

IEC 61000-4-11 (Voltage Dips and Interruptions)

# KEY SPECIFICATION – 716M12

## Switch Properties

Number of MAC Addresses: 8,000  
Aging Time: Programmable  
Latency Type: 2.9  $\mu$ s  
Switching Method: Store & Forward

## Physical

Height: 6.7" (16.9 cm)  
Width: 6.7" (16.9 cm)  
Depth: 2.2" (5.6 cm)  
Weight: 4.6 lbs. (2.1 kg)  
DIN Rail 35 mm (Optional)

## Electrical

Redundant Input Voltage: 10-49VDC (Regulated)  
High Voltage: 40-160VDC (Regulated)  
Redundant applications both inputs must be provided from the same Class 2 source.  
Input Current (max): 350mA max. @ 24VDC  
Inrush @ 24VDC: 18.0A/1.0ms @ 24VDC  
Input Ripple: Less than 100 mV  
N-TRON Power Supply: NTPS-24-1.3 (1.3 Amp@24VDC) (NOTE: Not appropriate for use with M12, POE, and HV models.)

## Environmental

Operating Temperature: -40°C to 85°C  
Storage Temperature: -40°C to 85°C  
High Voltage: -40°C to 80°C  
Operating Humidity: 5% to 100%  
(Non Condensing)  
Operating Altitude: 0 to 10,000 ft.


## Shock and Vibration (bulkhead mounting)

Shock: 200g @ 10ms  
Vibration/Seismic: 50g, 5-200Hz, Triaxial

## Reliability

MTBF: >2 Million Hours

## Pin Assignments

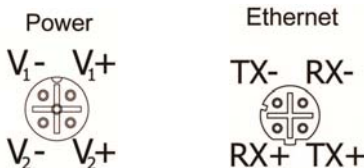

## Connectors

10/100BaseTX: (16) M12 D Coded Female Copper Ports  
POWER: (1) M12 A Coded Male Port  
COM: (1) M12 A Coded Female CLI Port  
NTCD-M12: (1) M12 A Coded Female Configuration Device Port

## Recommended Wiring Clearance:

Front: 4" (10.16 cm)

## Network Media

10BaseT: >Cat3 Cable  
100BaseTX: >Cat5 Cable  
minimum length : 1 meter  
maximum length : 100 meters

Warranty: 3 years from the date of purchase.

## **Regulatory Approvals:**

**Safety:** UL Listed per ANSI/ISA-12.12.01-2007 (US and Canada)

This equipment is suitable for use in Class I, Div 2, Groups A, B, C, D,  
or non-hazardous locations, T4A

The high voltage model is TÜV approved GS per EN 60950-1.

**EMI:** EN61000-6-4, EN55011 – Class A

CFR Title 47, Part 15, Subpart B - Class A

ICES-003 – Class A

**EMS:** EN61000-6-2

EN61000-4-2 (ESD)

EN61000-4-3 (RS)

EN61000-4-4 (EFT)

EN61000-4-5 (Surge)

EN61000-4-6 (Conducted Disturbances)

IEC 61000-4-8 (Power-frequency Magnetic Field)

IEC 61000-4-11 (Voltage Dips and Interruptions)

## Appendix A. XML Settings File Example

```
<!-- Overview of XML settings for N-TRON switches -->

<!-- XML settings can be downloaded to a switch to configure the switch. XML settings cover a
subset of the settings available through a web browser. -->

<!-- There are several top level configuration sections. Each section is optional.

<SystemConfiguration>
  <Switches/>
  <Administration/>
  <IPConfiguration/>
  <Users/>
  <Ports/>
  <DHCPServer/>
  <MACSecurity/>
</SystemConfiguration>
-->

<SystemConfiguration version="1" minSwVer="3.4.2">
  <!-- The minSwVer attribute is optional. If present, the XML settings are ignored if the
switch software version does not meet the minimum version requirement -->

  <!-- _____ -->

  <!-- The Switches block is optional. If present, the model name of the target switch must
be in the list for the file to be processed. -->
  <Switches>
    <Switch minSwVer="3.2.10">708TX</Switch> <!-- If the minSwVer attribute is present, it
overrides the minSwVer attribute of
SystemConfiguration. -->

    <Switch>7506GX2</Switch>
  </Switches>

  <!-- _____ -->

  <!-- Administration -->
  <Administration>
    <SwitchName>myname</SwitchName> <!-- optional --><!--255 character limit-->
    <SwitchLocation>mylocation</SwitchLocation><!-- optional --><!--255 character limit-->
    <SwitchContact>mycontact</SwitchContact> <!-- optional --><!--255 character limit-->
  </Administration>

  <!-- _____ -->

  <!-- IP configuration -->
  <IPConfiguration>
    <Mode>static OR dhcp</Mode> <!-- Mode must be static or dhcp -->

    <!-- If dhcp mode, these elements are the "Fallback" Address, Subnet, and Gateway.
Note: For an IP address of 192.168.1.201, there is no fallback address. -->

    <!-- All IP addresses have a 15 character limit (xxx.xxx.xxx.xxx) -->
    <Address>192.168.1.222</Address> <!-- 15 character limit -->
    <Subnet>255.255.255.0</Subnet> <!-- 15 character limit -->
    <Gateway>192.168.1.1</Gateway> <!-- 15 character limit -->

    <!-- If dhcp mode, this is the dhcp client id -->
    <ClientID>
      <!-- Use one of the elements (MACAddress, SwitchName, OtherText, OtherHex).
MACAddress and SwitchName use current switch values. -->
      <MACAddress/>
      <SwitchName/>
      <OtherText>myClientID</OtherText> <!-- 255 character limit -->
    </ClientID>
  </IPConfiguration>
</SystemConfiguration>
```

```

        <OtherHex>0102de03ad00be09ef</OtherHex> <!-- 255*2 character limit -->
    </ClientID>
</IPConfiguration>

<!-- _____ -->

<!-- User management -->
<!-- A list of logon accounts (5 maximum) to add to the switch. -->

<Users mode="keep or delete">    <!-- mode must be "keep" or "delete" -->
    <!-- mode=delete - delete existing accounts before adding accounts (default) -->
    <!-- mode=keep - do not delete existing accounts before adding accounts -->

    <!-- All User elements (name, password, access) are required. -->
    <User>
        <Name>Joe</Name>                <!-- 3-15 character limit -->
        <Password>xxx</Password>        <!-- 3-15 character limit -->
        <Access>admin OR user</Access>    <!-- Access must be admin or user -->
    </User>
</Users>

<!-- _____ -->

<!-- Port configuration -->
<!-- You may uses this block to define port VLAN identifiers (PVIDs) -->
<Ports>
    <ValidatePorts>yes OR no</ValidatePorts> <!-- optional --> <!-- Must be yes(default)
                                                or no. If no, invalid ports are ignored. -->

    <!-- Use PortNumber or PortName -->
    <Port>
        <PortNumber>4</PortNumber> <!-- PortNumber ranges from 1 to the maximum port
                                    number for the switch -->
        <PVID>1</PVID>              <!-- PVID ranges from 1 to 4094 -->
    </Port>
    <Port>
        <PortName>TX6</PortName>    <!-- Name of port on switch -->
        <PVID>26</PVID>             <!-- PVID ranges from 1 to 4094 -->
    </Port>
</Ports>

<!-- _____ -->

<!-- DHCP server -->

<DHCPServer mode="keep or delete">    <!-- mode must be "keep" or "delete" -->
    <!-- mode=delete - delete existing profiles before adding profiles (default) -->
    <!-- mode=keep - do not delete existing profiles before adding profiles -->

    <Enabled>yes OR no</Enabled>        <!-- Enabled must be yes or no -->

    <!-- If the server is enabled (enabled=yes), you can add DHCP server profiles.
    (If not enabled, can not add profiles.) -->
    <Profile>

        <!-- Required: Name, LowIP, HighIP, LeaseDays. LeaseHours is optional, and
        defaults to 0. -->
        <Name>prof1</Name>              <!-- required -->    <!-- 19 character limit -->
        <LowIP>192.168.2.1</LowIP>      <!-- required -->
        <HighIP>192.168.2.254</HighIP> <!-- required -->
        <LeaseDays>28</LeaseDays>       <!-- required -->
        <LeaseHours>0</LeaseHours>      <!-- optional -->

        <!--The Advanced block is optional, and all elements within the block are
        optional.-->
        <Advanced>    <!-- optional -->
            <!-- All elements below are optional -->
            <BroadcastAddress>192.168.2.255</BroadcastAddress>

```

```

        <DomainName>N-TRON.com</DomainName>      <!-- 63 character limit -->
        <DNSServer1>192.168.2.10</DNSServer1>
        <DNSServer2>192.168.2.11</DNSServer2>
        <Gateway1>192.168.2.1</Gateway1>
        <Gateway2>192.168.2.2</Gateway2>
    </Advanced>

    <IPMaps>
    <!-- The DynamicRange is the only IP Map supported. You may have 0 or more. -->
        <DynamicRange>
            <!-- low and high within range of profile -->
            <LowIP>192.168.2.1</LowIP>      <!-- required -->
            <HighIP>192.168.2.4</HighIP>    <!-- required -->
        </DynamicRange>
    </IPMaps>
</Profile>
</DHCPServer>

<!-- _____ -->

<!-- MAC security -->
<MACSecurity>
    <Mode>learning OR locked</Mode>      <!-- Mode must be learning or locked -->

    <!-- Authorized entries -->
    <Authorized mode="keep or delete">    <!-- mode must be "keep" or "delete" -->
        <!-- mode=delete - delete existing authorized MACs before adding
        authorized MACs (default) -->
        <!-- mode=keep - do not delete existing authorized MACs before
        adding authorized MACs -->

    <ValidatePorts>yes OR no</ValidatePorts> <!-- optional -->
                                                <!-- Must be yes(default) or no.
                                                If no, invalid ports are ignored. -->

    <Entry>
        <MACAddress>00:07:af:ff:5b:c0</MACAddress> <!-- 17 character limit -->
        <!-- MAC is valid on all ports listed in the ports list.
        If the ports list is missing, then the MAC is valid on all ports. -->
        <Ports>
            <Port>
                <!-- Use PortNumber or PortName -->
                <PortNumber>4</PortNumber> <!-- 1 to maximum port for switch -->
            </Port>
            <Port>
                <PortName>TX5</PortName> <!-- Name of port on switch -->
            </Port>
        </Ports>
    </Entry>
    <Entry>
        <MACAddress>0007af1d6460</MACAddress> <!-- Example of a MAC with no
        delimiters, valid on all ports. -->
    </Entry>
</Authorized>
</MACSecurity>

</SystemConfiguration>

```

## **N-TRON Limited Warranty**

N-TRON, Corp. warrants to the end user that this hardware product will be free from defects in workmanship and materials, under normal use and service, for the applicable warranty period from the date of purchase from N-TRON or its authorized reseller. If a product does not operate as warranted during the applicable warranty period, N-TRON shall, at its option and expense, repair the defective product or part, deliver to customer an equivalent product or part to replace the defective item, or refund to customer the purchase price paid for the defective product. All products that are replaced will become the property of N-TRON. Replacement products may be new or reconditioned. Any replaced or repaired product or part has a ninety (90) day warranty or the remainder of the initial warranty period, whichever is longer. N-TRON shall not be responsible for any custom software or firmware, configuration information, or memory data of customer contained in, stored on, or integrated with any products returned to N-TRON pursuant to any warranty.

**OBTAINING WARRANTY SERVICE:** Customer must contact N-TRON within the applicable warranty period to obtain warranty service authorization. Dated proof of purchase from N-TRON or its authorized reseller may be required. Products returned to N-TRON must be pre-authorized by N-TRON with a Return Material Authorization (RMA) number marked on the outside of the package, and sent prepaid and packaged appropriately for safe shipment. Responsibility for loss or damage does not transfer to N-TRON until the returned item is received by N-TRON. The repaired or replaced item will be shipped to the customer, at N-TRON's expense, not later than thirty (30) days after N-TRON receives the product. N-TRON shall not be responsible for any software, firmware, information, or memory data of customer contained in, stored on, or integrated with any products returned to N-TRON for repair, whether under warranty or not.

**ADVANCE REPLACEMENT OPTION:** Upon registration, this product qualifies for advance replacement. A replacement product will be shipped within three (3) days after verification by N-TRON that the product is considered defective. The shipment of advance replacement products is subject to local legal requirements and may not be available in all locations. When an advance replacement is provided and customer fails to return the original product to N-TRON within fifteen (15) days after shipment of the replacement, N-TRON will charge customer for the replacement product, at list price.

**WARRANTIES EXCLUSIVE:** IF AN N-TRON PRODUCT DOES NOT OPERATE AS WARRANTED ABOVE, CUSTOMER'S SOLE REMEDY FOR BREACH OF THAT WARRANTY SHALL BE REPAIR, REPLACEMENT, OR REFUND OF THE PURCHASE PRICE PAID, AT N-TRON'S OPTION. TO THE FULL EXTENT ALLOWED BY LAW, THE FOREGOING WARRANTIES AND REMEDIES ARE EXCLUSIVE AND ARE IN LIEU OF ALL OTHER WARRANTIES, TERMS, OR CONDITIONS, EXPRESS OR IMPLIED, EITHER IN FACT OR BY OPERATION OF LAW, STATUTORY OR OTHERWISE, INCLUDING WARRANTIES, TERMS, OR CONDITIONS OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, SATISFACTORY QUALITY, CORRESPONDENCE WITH DESCRIPTION, AND NON-INFRINGEMENT, ALL OF WHICH ARE EXPRESSLY DISCLAIMED. N-TRON NEITHER ASSUMES NOR AUTHORIZES ANY OTHER PERSON TO ASSUME FOR IT ANY OTHER LIABILITY IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE OR USE OF ITS PRODUCTS. N-TRON SHALL NOT BE LIABLE UNDER THIS WARRANTY IF ITS TESTING AND EXAMINATION DISCLOSE THAT THE ALLEGED DEFECT OR MALFUNCTION IN THE PRODUCT DOES NOT EXIST OR WAS CAUSED BY CUSTOMER'S OR ANY THIRD PERSON'S MISUSE, NEGLIGENCE, IMPROPER INSTALLATION OR TESTING, UNAUTHORIZED ATTEMPTS TO OPEN, REPAIR OR MODIFY THE PRODUCT, OR ANY OTHER CAUSE BEYOND THE RANGE OF THE INTENDED USE, OR BY ACCIDENT, FIRE, LIGHTNING, POWER CUTS OR OUTAGES, OTHER HAZARDS, OR ACTS OF GOD.

**LIMITATION OF LIABILITY:** TO THE FULL EXTENT ALLOWED BY LAW, N-TRON ALSO EXCLUDES FOR ITSELF AND ITS SUPPLIERS ANY LIABILITY, WHETHER BASED IN CONTRACT OR TORT (INCLUDING NEGLIGENCE), FOR INCIDENTAL, CONSEQUENTIAL, INDIRECT, SPECIAL, OR PUNITIVE DAMAGES OF ANY KIND, OR FOR LOSS OF REVENUE OR PROFITS, LOSS OF BUSINESS, LOSS OF INFORMATION OR DATA, OR OTHER FINANCIAL LOSS ARISING OUT OF OR IN CONNECTION WITH THE SALE, INSTALLATION, MAINTENANCE, USE, PERFORMANCE, FAILURE, OR INTERRUPTION OF ITS PRODUCTS, EVEN IF N-TRON OR ITS AUTHORIZED RESELLER HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, AND LIMITS ITS LIABILITY TO REPAIR, REPLACEMENT, OR REFUND OF THE PURCHASE PRICE PAID, AT N-TRON'S OPTION. THIS DISCLAIMER OF LIABILITY FOR DAMAGES WILL NOT BE AFFECTED IF ANY REMEDY PROVIDED HEREIN SHALL FAIL OF ITS ESSENTIAL PURPOSE.

**DISCLAIMER:** Some countries, states, or provinces do not allow the exclusion or limitation of implied warranties or the limitation of incidental or consequential damages for certain products supplied to consumers, or the limitation of liability for personal injury, so the above limitations and exclusions may be limited in their application to you. When the implied warranties are not allowed to be excluded in their entirety, they will be limited to the duration of the applicable written warranty. This warranty gives you specific legal rights which may vary depending on local law.

**GOVERNING LAW:** This Limited Warranty shall be governed by the laws of the State of Delaware, U.S.A