| TYPE | OUTPUT | | POLE | TIME RATING | VOLTAGE V | Hz | SYN.SPEED R.P.M |
|---|---|---|---|---|---|---|---|
| | HP. | kW. | | | | | |
| AEHAGD | 150 | 111.8 | 4 | CONT. | 2300/4000 | 60 | 1800 |

TOTALLY ENCLOSED FAN-COOLED TYPE. SQUIRREL-CAGE ROTOR

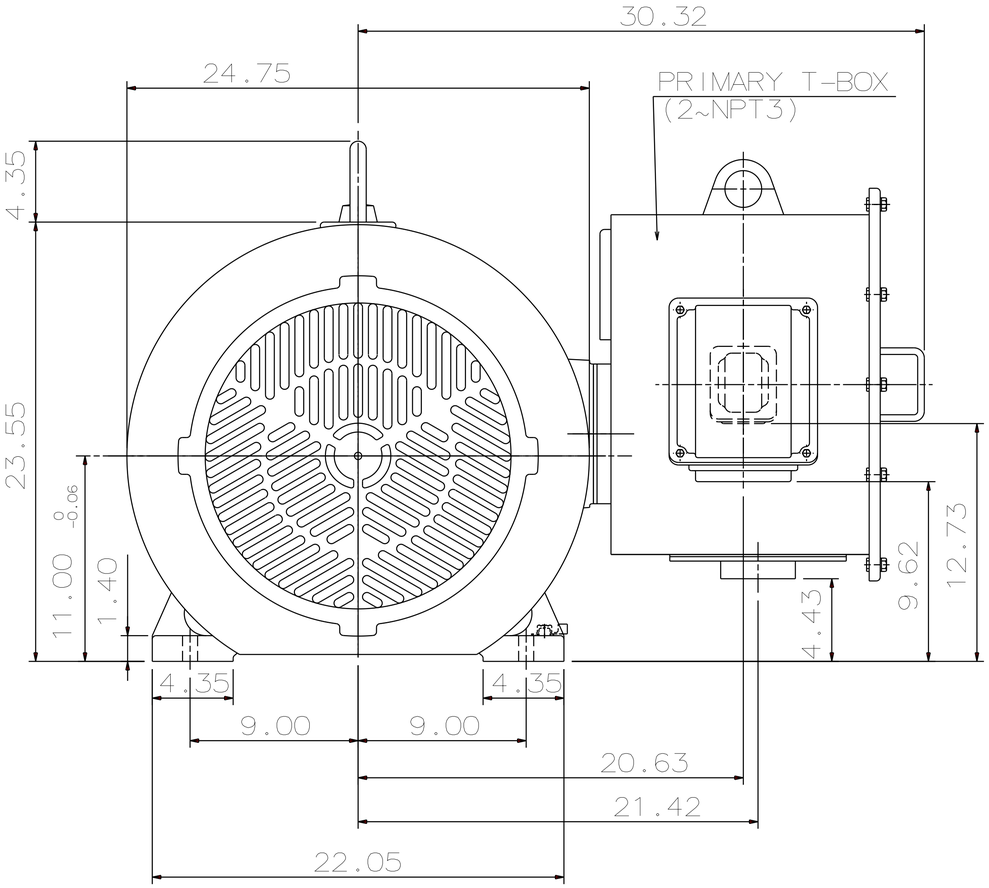


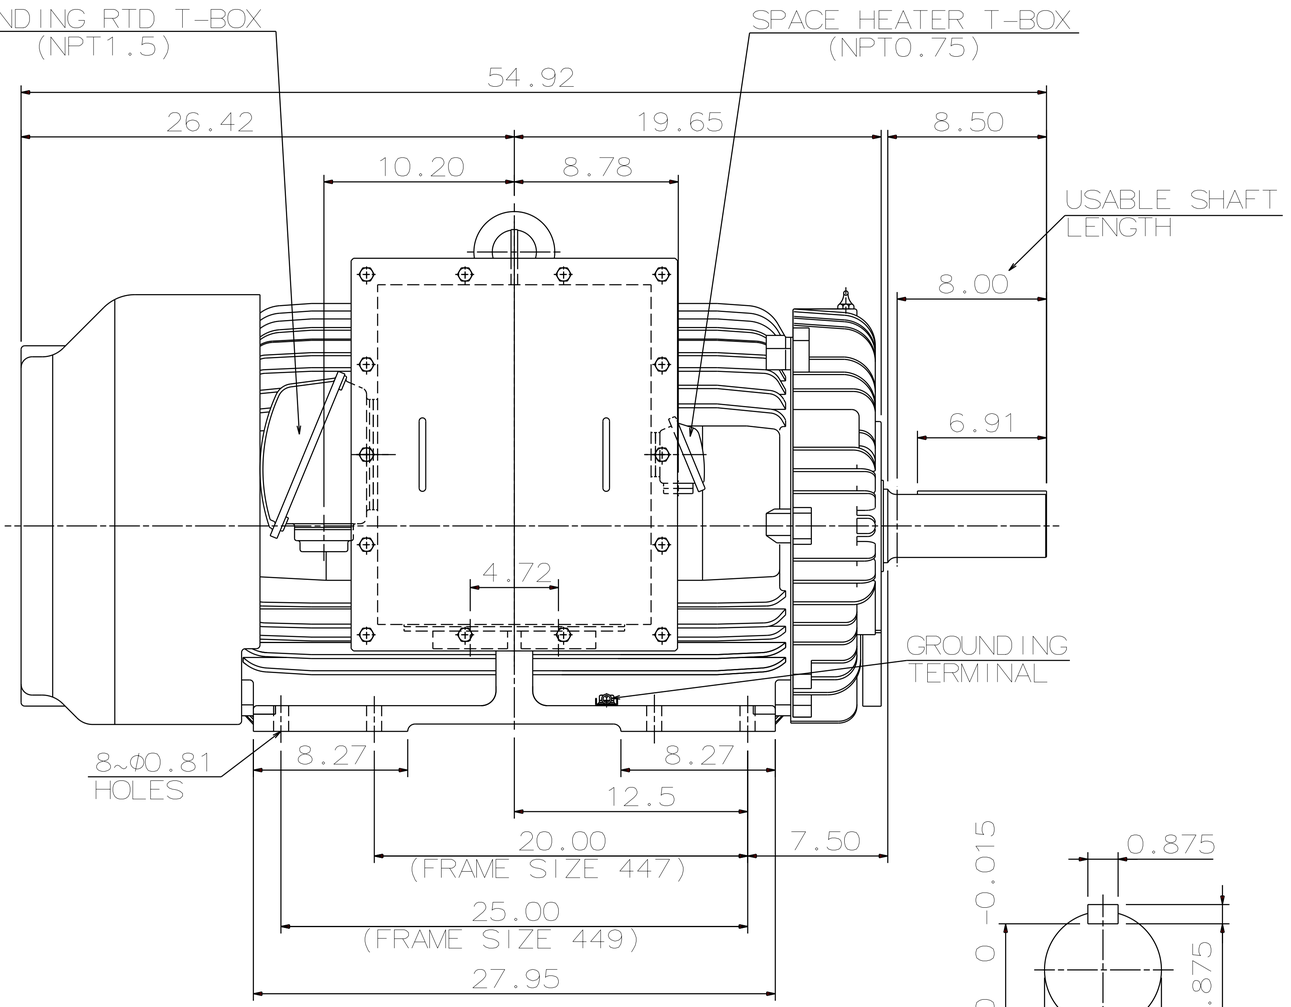





SHAFT END
ENLARGED VIEW

NOTE:
1. DIMENSIONS IN inch
2. FRAME NO. 449T
3. F CLASS INSULATION, S.F.1.15
4. FOR DIRECT FLEXIBLE COUPLING
5. ENCLOSURE: IP55
6. BEARING SIZE: DRIVE-END 6320
   OPP. DRIVE-END 6316
7. WITH WINDING RTD: PT 100Ω/0℃ 6PCS
8. WITH SPACE HEATER: SINGLE PHASE,120V
9. NON-SPARKING FAN
10. CORROSION PROOF
11. APPROXIMATE WEIGHT: 2,550 LBS

| | | |
|---|---|---|
| DWN. | J.CHANG | MAY•21•2015 |
| CHKD. | H.HUANG | MAY•21•2015 |
| APPD. | C.LIU | MAY•21•2015 |

DATE DEC 08 2016

KD1504

OUTLINE DIMENSIONS

3-PHASE INDUCTION MOTOR

TECO Westinghouse

DWG NO. 4B040M517 REV: 00