CATALOG #	TYPE	FRAME	OUTPUT		POLE	SYN. SPEED	VOLTAGE	Hz.	TIME	INSULATION	SERVICE	BEARINGS		WEIGHT
			HP	kW		R.P.M.	V.		RATING	CLASS	FACTOR	DE	NDE	LBS
PG7004	AMHG	5011C	700	522	4	1800	2300/4160	60	CONT.	F	1.15	NU324C3	6320C3	4100

WEATHER PROTECTED TYPE I. SQUIRREL CAGE ROTOR

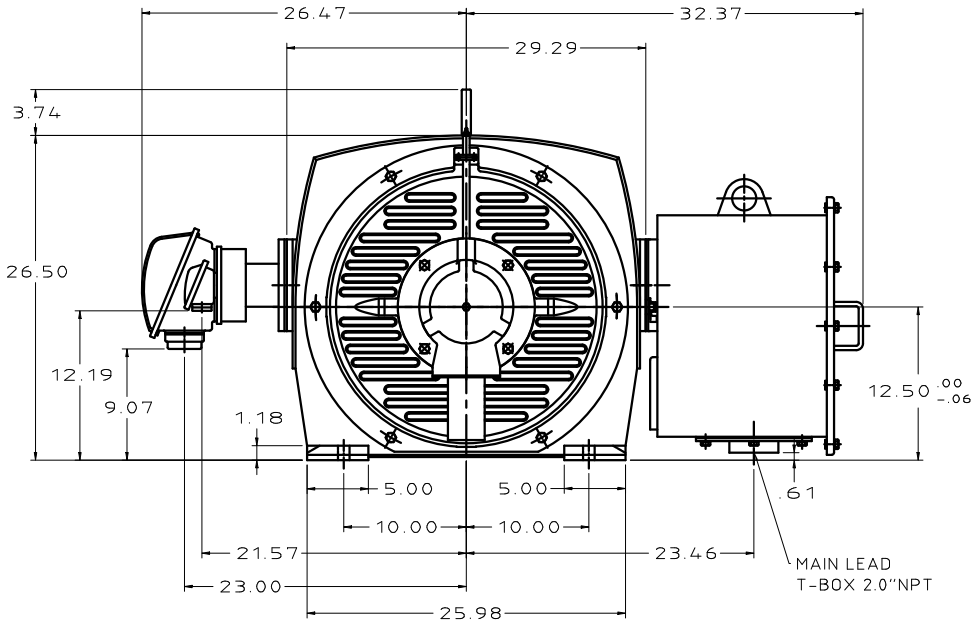

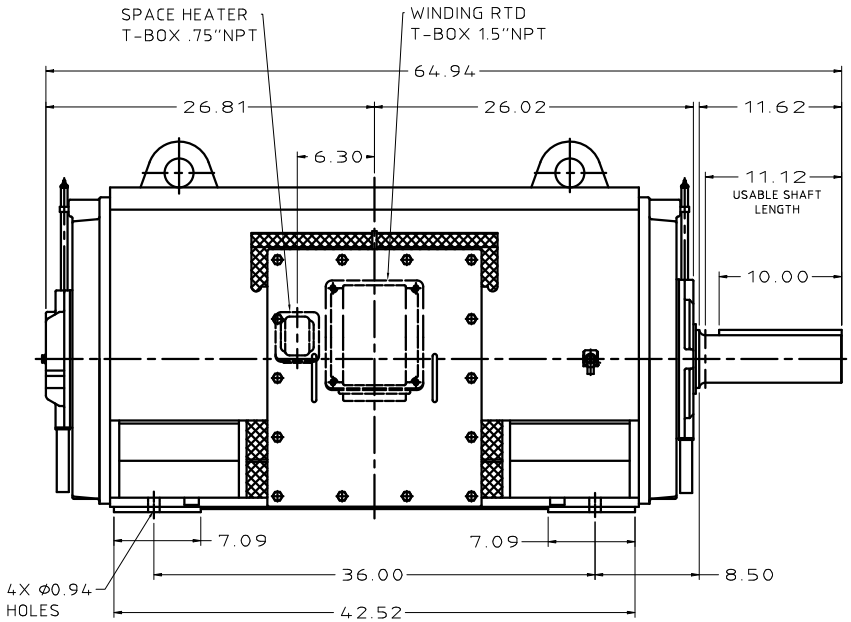

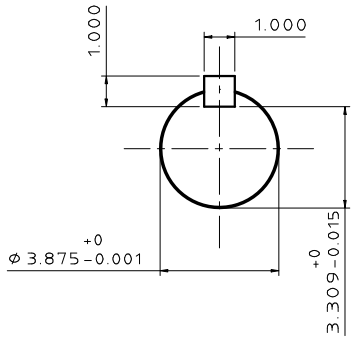

NOTES:

1. DIMENSIONS IN INCH.
2. ENCLOSURE: IP23.
3. FOR BELT DRIVE.
4. SPACE HEATER RATED 120 VOLT, SINGLE PHASE.
5. 100 OHM PLATINUM WINDING RTD'S, 2 PER PHASE.
6. PROVISION FOR BEARING RTD MOUNTING:
   2X .50" NPT PER BRACKET.

REV. DATA

TECO Westinghouse

REV NO 01

3-PHASE INDUCTION MOTOR
OUTLINE DIMENSIONS

DWG NO. PG7004

DWN. K. MILNER | 071817 | APPD T. FELPS | 071817

TECO-WESTINGHOUSE MOTOR COMPANY ROUND ROCK, TEXAS USA

REF: 4B040L322

APPR REV A