Ethernet Physical Media Connectivity

TURCK

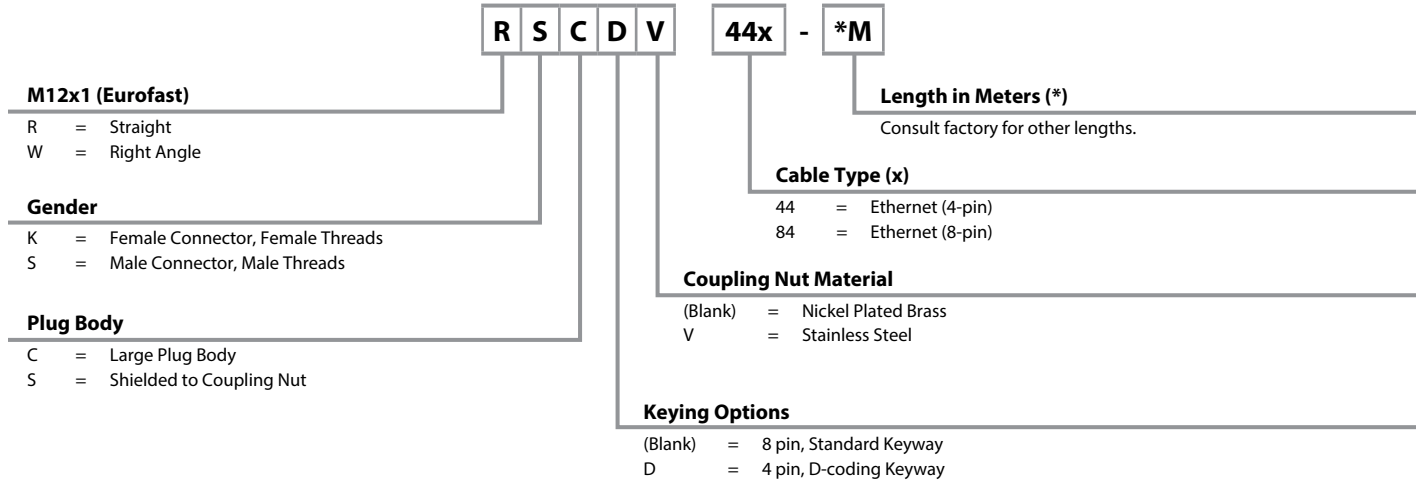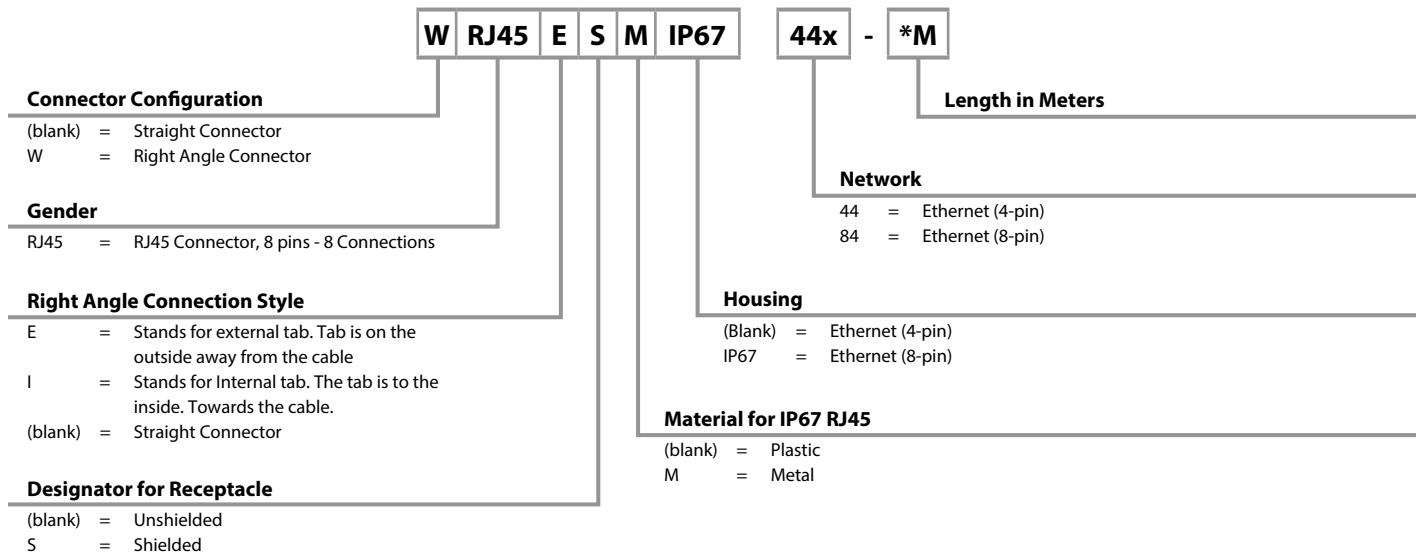## Eurofast® Cordset Part Number Key

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

| R | S | C | D | V | 44x | - | *M |

M12x1 (Eurofast)

| R | = | Straight |
| W | = | Right Angle |

Gender

| K | = | Female Connector, Female Threads |
| S | = | Male Connector, Male Threads |

Plug Body

| C | = | Large Plug Body |
| S | = | Shielded to Coupling Nut |

Keying Options

| (Blank) | = | 8 pin, Standard Keyway |
| D | = | 4 pin, D-coding Keyway |

Coupling Nut Material

| (Blank) | = | Nickel Plated Brass |
| V | = | Stainless Steel |

Cable Type (x)

| 44 | = | Ethernet (4-pin) |
| 84 | = | Ethernet (8-pin) |

Length in Meters (*)

Consult factory for other lengths.

RJ45 Network Cordsets Part Number Key

| W | RJ45 | E | S | M | IP67 | 44x | - | *M |

Connector Configuration

| (blank) | = | Straight Connector |
| W | = | Right Angle Connector |

Gender

| RJ45 | = | RJ45 Connector, 8 pins - 8 Connections |

Right Angle Connection Style

E	=	Stands for external tab. Tab is on the outside away from the cable
I	=	Stands for Internal tab. The tab is to the inside. Towards the cable.
(blank)	=	Straight Connector

Designator for Receptacle

| (blank) | = | Unshielded |
| S | = | Shielded |

Material for IP67 RJ45

| (blank) | = | Plastic |
| M | = | Metal |

Housing

| (Blank) | = | Ethernet (4-pin) |
| IP67 | = | Ethernet (8-pin) |

Network

| 44 | = | Ethernet (4-pin) |
| 84 | = | Ethernet (8-pin) |

Length in Meters

Ethernet

Ethernet Physical Media Connectivity

Eurofast® Receptacle Part Number Key

Part Number Keys are to assist in IDENTIFICATION ONLY. Consult factory for catalog items not identified.

F | K | F | V | | 44x | - | *M

M12x1 (Eurofast)

Gender

| K | = | Female Connector, Female Threads |
| S | = | Male Connector, Male Threads |

Housing Style

(Blank)	=	Front Mount
FD	=	Standard Back Panel Mount
SDE	=	Shielded Back Panel Mount, Large Body

Length in Meters (*)

Consult factory for other lengths.

Cable Type (x)

| 44 | = | Ethernet (4-pin) |
| 84 | = | Ethernet (8-pin) |

Keying Options

| (Blank) | = | 8 pin, Standard Keyway |
| D | = | 4 pin, D-coding Keyway |

Coupling Nut Material

| (Blank) | = | Nickel Plated Brass |
| V | = | Stainless Steel |