




1) Optical axis emitter, 2) Optical axis receiver, 3) Output function

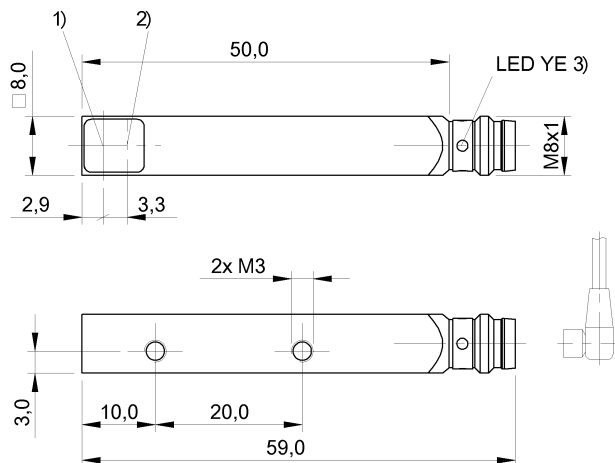

Basic features

Approval/Conformity	cULus CE UKCA WEEE
Basic standard	IEC 60947-5-2
Principle of operation	Photoelectric sensor
Reference reflector	BOS R-2
Series	Q08M
Style	Square Connection 90°

Display/Operation

Display	Limit range - LED yellow, flashing LED yellow: Light received
---------	--

Electrical connection

Connection	Connector, M8x1-Male, 3-pin
Contact, surface protection	Gold plated
Polarity reversal protected	yes
Protection against device mix-ups	yes
Short-circuit protection	yes

Electrical data

Load capacitance max. at Ue	0.5 µF
No-load current Io max. at Ue	15 mA
Operating voltage Ub	10...30 VDC
Rated insulation voltage Ui	75 V DC
Rated operating current Ie	100 mA
Rated operating voltage Ue DC	24 V
Ready delay tv max.	20 ms
Ripple max. (% of Ue)	10 %
Switching frequency	500 Hz
Turn-off delay toff max.	1 ms
Turn-on delay ton max.	1 ms
Utilization category	DC -13
Voltage drop Ud max. at Ie	0.7 V

Environmental conditions

Ambient temperature	-5...55 °C
EN 60068-2-27, Shock	Half-sinus, 30 gn, 11 ms, 3x6 Half-sinus, 100 gn, 2 ms, 3x8000
EN 60068-2-6, Vibration	10...2000 Hz, amplitude 1 mm, 30 gn, 3x5 h 10...55 Hz, amplitude 1 mm, 3x30 min
IP rating	IP67

Functional safety

MTTF (40 °C)	972.7 a
--------------	---------

Photoelectric Sensors
BOS Q08M-PO-PR20-S49
Order Code: BOS01TA

BALLUFF

Interface

Switching output PNP normally closed (NC)

Material

Housing material Zinc, Die casting, nickel-plated
Material sensing surface PMMA
Surface protection nickel-plated

Mechanical data

Dimension 8 x 59 x 8 mm
Mounting part Screw M3

Optical features

Beam characteristic Divergent
LED group per IEC 62471 Exempt Group
Light spot size Ø 3.0 mm Light exit
Light type LED, red light
Polarizing filter yes
Principle of optical operation Retroreflective sensor
Switching function, optical Light-on
Wave length 645 nm

Range/Distance

Range 0...1 m
Rated operating distance Sn 1 m

Remarks


Order accessories separately.
For additional information, refer to user's guide.
Only for applications per NFPA 79 (machines with a supply voltage of maximum 600 V). Use an R/C (CYJV2) cable with suitable properties for attaching the device.
The sensor is functional again after the overload has been eliminated.
For more information about MTTF and B10d see MTTF / B10d Certificate

Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings



Wiring Diagrams



Opto Symbols

